
NOTE. The document identifier and heading have been changed on this page to reflect that this is a performance specification. There are no other changes to this document. The document identifier on subsequent pages has not been changed, but will be changed the next time this document is revised.

PERFORMANCE SPECIFICATION SHEET

FILTERS, RADIO FREQUENCY INTERFERENCE,
STYLE FL50

This specification is approved for use by the Naval Electronic Systems Command, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the filters described herein shall consist of this document and the latest issue of Specification MIL-F-15733.

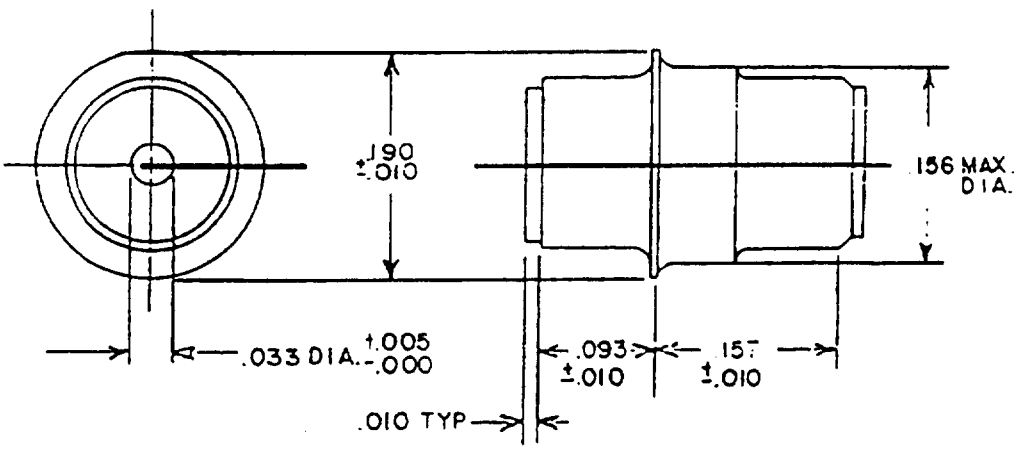

INCHES	MM
.005	.13
.010	.25
.033	.84
.093	2.36
.156	3.96
.157	3.99
.190	4.83



Circuit configuration

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Circuit diagram is for information only.
4. Suggested mounting hole is .160 (4.06 mm) diameter.

FIGURE 1. Case and circuit configuration.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:29Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Case: Not applicable (metallic mounting eyelet termination).

Mounting termination: Solderable.

Operating temperature range: -55° to +125°C.

Rated voltage: 125 Vdc over the operating temperature range.

Rated current: 10 amperes, dc.

Insertion loss characteristic: See table I.

TABLE I. Insertion loss requirements.

Minimum no load insertion loss at 25°C, per MIL-STD-220			
10 MHz	100 MHz	1 GHz	10 GHz
5	35	50	50

Seal: Not applicable.

Capacitance to ground: MIL-STD-202, method 305. Test frequency shall be 1,000 Hz ±100 Hz. Capacitance shall be 1750 pF minimum.

Dielectric withstanding voltage: MIL-STD-202, method 301. The test voltage shall be 2.5 x rated dc voltage and shall be applied for 5 ±1 seconds. Maximum charging current shall not exceed 50 mA.

Barometric pressure (reduced): MIL-STD-202, method 105, test condition B (50,000 ft.). Dielectric withstanding voltage shall be in accordance with initial requirements except the test voltage shall be 1.25 x rated dc voltage.

Insulation resistance: Shall be at least 1,000 megohms at +25°C per MIL-F-15733.

Voltage drop: Not applicable.

Insertion loss: In accordance with MIL-F-15733 and table I.

Overload: In accordance with MIL-F-15733. After the test, insulation resistance at +25°C shall be measured and shall meet initial requirements.

Terminal strength: Not applicable.

Flashpoint of impregnant or potting compound: Not applicable.

Resistance to soldering heat: MIL-STD-202, method 210, test condition B.

Resistance to solvents: Not applicable.

Salt spray (corrosion): Not applicable.

Thermal shock and immersion:

Thermal shock: Method 107, test condition A, MIL-STD-202, except the temperature at step 3 shall be +125°C.

Immersion: Method 104, test condition A, MIL-STD-202.

Measurements after final cycle:

Dielectric withstanding voltage with 90 percent of the initial voltage applied for 5 ±1 seconds.

Insulation resistance shall not be less than 30 percent of the initial value.

Insertion loss (check test) shall meet initial requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:29Z
Check the source to verify that this is the current version before use.

Vibration (high frequency): Method 204, test condition D (20 g), MIL-STD-202.
Electrical load: Rated voltage and rated current shall be applied continuously during test.
Test during vibration: During the last cycle in each direction, an electrical measurement shall be made to determine intermittent open or short circuiting.

Moisture resistance: Not applicable.

Life: Method 108, test condition D, MIL-STD-202.

Test temperature: +125°C.

Test voltage: 1.4 x rated dc.

Test current: 10 amperes, dc.

Measurements after test:
Dielectric withstanding voltage with 90 percent of the initial voltage applied for 5 ±1 seconds.
Insulation resistance shall not be less than 50 percent of the initial requirement.
Insertion loss (check test) shall meet initial requirements.

Part number: M15733/66-0001.

Marking: Filters shall not be marked. Full marking, in accordance with MIL-F-15733, shall be marked on the unit package.

Supersession data: This specification includes the requirements of contractor (00724) specification 08-00932, dated 8 January 1975, revision B.

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5915-N179)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:29Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:29Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.
NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE
MIL-F-15733/66(EC)

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO

DATE

DD FORM 1 OCT 76 1426

EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:29Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:29Z
Check the source to verify that this is the current version before use.