NOTE: The document identifier and heading have been changed on this page to reflect that this is a performance specification. There are no other changes to this document. The document identifier on subsequent pages has not been changed, but will be changed the next time this document is revised.

MIL-PRF-15733/67A
5 November 1982
SUPERSEDING
MIL-F-15733/67(USAF)
17 October 1980

PERFORMANCE SPECIFICATION SHEET

FILTERS, RADIO FREQUENCY INTERFERENCE, HERMETICALLY SEALED,

STYLE FL88

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the filters described herein shall consist of this specification and the latest issue of MIL-F-15733.


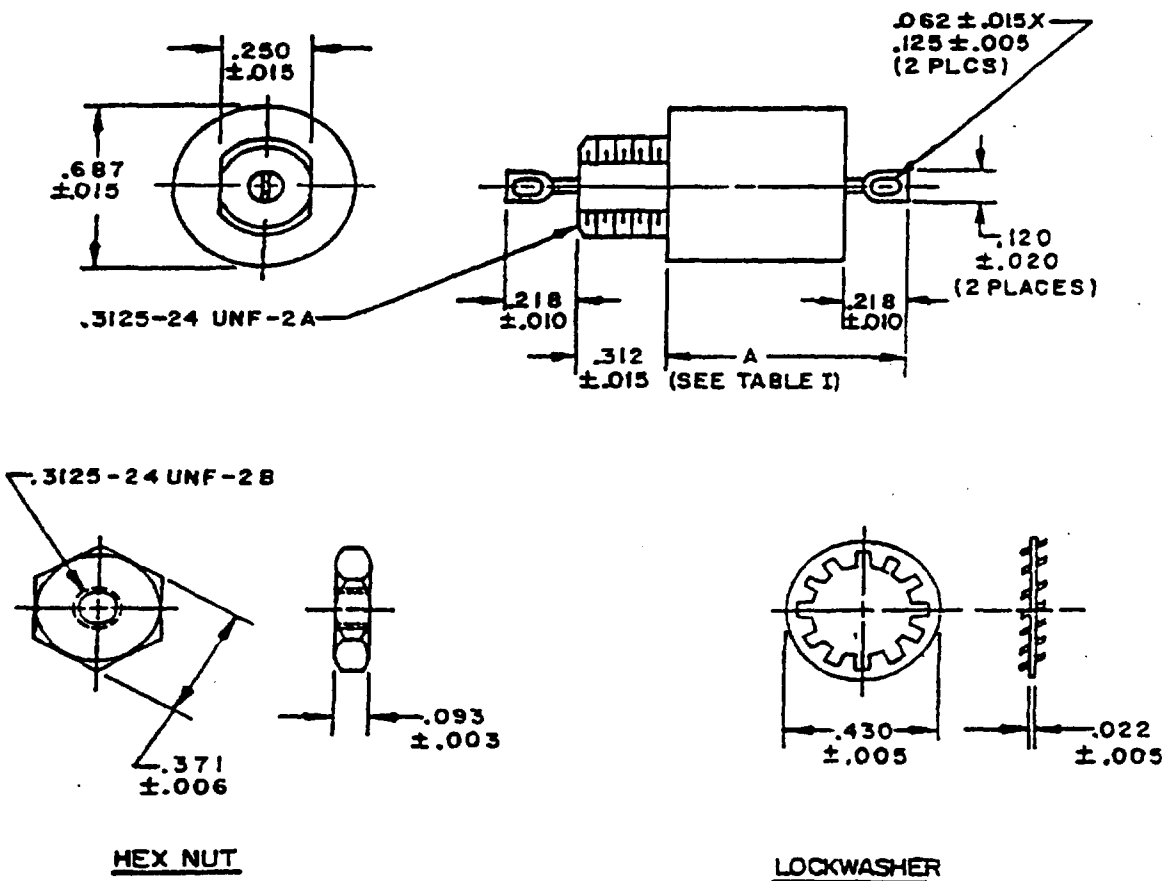


FIGURE 1. Case dimensions, mounting hardware and circuit diagrams.

(A) denotes changes

FSC 5915

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:30Z
Check the source to verify that this is the current version before use.

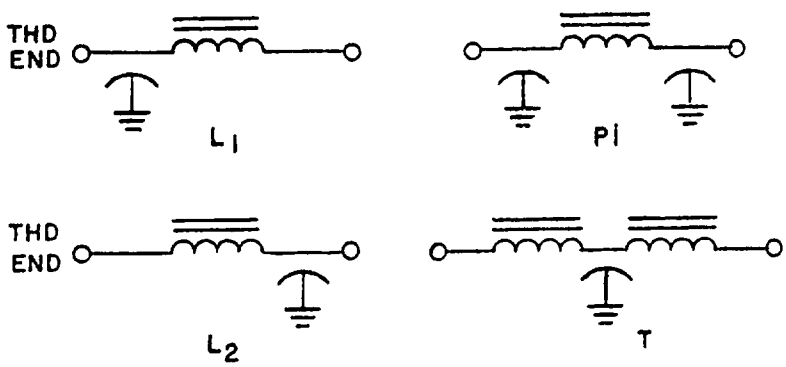

CIRCUIT DIAGRAMS

INCHES	MM	INCHES	MM
.003	.08	.120	3.05
.005	.13	.125	3.18
.006	.15	.218	5.54
.010	.25	.250	6.35
.015	.38	.312	7.92
.020	.51	.371	9.42
.022	.56	.430	10.92
.062	1.57	.687	17.45
.093	2.36		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Circuit diagram is for information only.
4. All filters shall be supplied with mounting hardware.
5. Recommended mounting torque: 60 in-oz. maximum.
6. Terminal identification (non-symmetrical filters): The case shall be marked at the threaded end of the filter, with the symbol "C" or the symbol "L", as follows:

Circuit	Symbol
L_1	C
L_2	L

FIGURE 1. Case dimensions, mounting hardware and circuit diagrams - Continued.

Source: https://assist.dla.mil - Downloaded: 2026-10-18T07:30Z
Check the source to verify that this is the current version before use.

Ⓐ TABLE 1. Dimensions and electrical characteristics.

Dash number	Rated dc voltage (volts)	Rated current (amps)	Filter circuit	Dimensions A ±.030	Insulation resistance minimum (megohms)	Voltage drop (volts)	Insertion loss dB 1/					
							75 kHz	150 kHz	300 kHz	1 MHz	10 MHz	1 GHz
0001	100	.5	L_2	.875	300	.15	35	48	60	70	70	70
0002	100		L_1									
0003	100	1	L_2	.875	300	.21	30	40	52	70	70	70
0004	100		L_1									
0005	100	3	L_2	.875	700	.09	20	29	37	55	70	70
0006	100		L_1									
0007	100	5	L_2	.875	700	.035	20	29	34	47	70	70
0008	100		L_1									
0009	100	.5	Pi	1.170	350	.15	55	75	80	80	80	80
0010	100	1	Pi	1.170	350	.21	52	69	80	80	80	80
0011	100	3	Pi	1.170	350	.09	26	48	66	80	80	80
0012	100	5	Pi	1.170	350	.10	15	38	58	80	80	80
0013	100	2	T	1.170	700	.16	16	40	50	70	70	70

1/ No-load insertion loss measurement shall be performed at 75 kHz and 1 GHz. Full-load insertion loss measurement shall be performed from 150 kHz to 10 MHz.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:30Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Case: Metal.

Terminals: Solderable.

Temperature characteristic: D, -55°C to +125°C.

Operating temperature range: -55°C to +125°C.

Rated voltage: See table I.

Rated current: See table I.

Creepage and clearance: Not applicable.

Seal: Method 112, test condition A, MIL-STD-202.

Capacitance to ground: Not applicable.

Temperature rise: 25°C maximum.

Dielectric withstanding voltage: MIL-STD-202, method 301. The test voltage shall be 2.5 x rated dc voltage and shall be applied for 5 ±1 seconds. Maximum charging current shall not exceed 50 mA.

Barometric pressure (reduced): MIL-STD-202, method 105, test condition B (50,000 ft.). Dielectric withstanding voltage shall be in accordance with initial requirements except the test voltage shall be 1.50 x rated dc voltage. Maximum charging current shall not exceed 50 mA.

Ⓐ Insulation resistance: Shall be as specified in table I at +25°C in accordance with MIL-F-15733. Test potential - rated dc voltage.

Voltage drop: See table I.

Insertion loss: In accordance with MIL-F-15733 and table I.

Overload: In accordance with MIL-F-15733. After the test, insulation resistance and voltage drop at +25°C shall be measured and shall meet initial requirements. A test current of 140 percent of rated current at maximum rated frequency shall be applied for 15 minutes.

Terminal strength: Method 211, test condition A, 5 pounds, MIL-STD-202.

Resistance to soldering heat: MIL-STD-202, method 210, test condition B.

Salt spray (corrosion): Method 101, test condition A, MIL-STD-202.

Thermal shock and immersion:

Thermal shock: Method 107, test condition A, MIL-STD-202, except the temperature at step 3 shall be +125°C.

Immersion: Method 104, test condition A, MIL-STD-202.

Measurements after final cycle:

Dielectric withstanding voltage with 90 percent of the initial voltage applied for 5 ±1 seconds. Maximum charging current: 50 mA.

Insulation resistance shall be not less than 30 percent of the initial value.

Insertion loss (check test) shall meet initial requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:30Z
Check the source to verify that this is the current version before use.

Shock (specified pulse): Method 213, test condition I, MIL-STD-202.

Electrical load: 100 percent of the rated voltage between terminals and case.

Vibration (high frequency): Method 204, test condition D (20 g), MIL-STD-202.

Electrical load: Rated voltage and rated current shall be applied continuously during test.

Test during vibration: During the last cycle in each direction, an electrical measurement shall be made to determine intermittent open or short circuiting. After vibration, filters shall meet the initial requirements of insertion loss (check test).

Moisture resistance: Method 107, test condition B, MIL-STD-202, except that the temperature of step 3 shall be +125°C; no measurement shall be made before and after cycling. Filters shall then be tested in accordance with method 106, MIL-STD-202.

Initial measurements: Not applicable.

Polarization voltage: 100 V dc.

Measurements after 24-hour drying period:

Dielectric withstanding voltage with 90 percent of the initial voltage applied for 5 ±1 seconds.

Insulation resistance shall be not less than 1 gigohm.

Insertion loss (check test) shall meet the initial requirements.

Life: Method 108, test condition D, MIL-STD-202.

Test temperature: +125°C.

Test voltage: 1.4 x rated dc voltage.

Test current: See table I.

Measurements after test:

Dielectric withstanding voltage with 90 percent of the initial voltage applied for 5 ±1 seconds.

Insulation resistance shall be not less than 30 percent of the initial requirement.

Insertion loss (check test) shall meet initial requirements.

Part number: M15733/67- (dash number from table I).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:30Z
Check the source to verify that this is the current version before use.

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - AR, MI
Navy - SH
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - ME, AT, AV
Navy - MC, AS, OS
Air Force - 19

Agent:
DLA - ES

Preparing activity:
Navy - EC

(Project 5915-0263-2)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:30Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS. This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.
NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER (Number) AND TITLE
MIL-F-15733/67

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY (Printed or typed name and address — Optional)

TELEPHONE NO.

DATE

DD FORM 1 OCT 76 1426

EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:30Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY

Naval Electronic Systems Command
Washington, D. C. 20363

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

BUSINESS REPLY MAIL

FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

COMMANDER
NAVAL ELECTRONIC SYSTEMS COMMAND
DEFENSE STANDARDIZATION PROGRAM BRANCH
DEPARTMENT OF THE NAVY
WASHINGTON, D. C. 20363

ATTN: ELEX 8111

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:30Z
Check the source to verify that this is the current version before use.