INCH-POUND

MIL-PRF-15733/67C
4 August 2020
SUPERSEDING
MIL-PRF-15733/67B
w/AMENDMENT 1
23 April 2009

PERFORMANCE SPECIFICATION SHEET

FILTERS, RADIO FREQUENCY INTERFERENCE, HERMETICALLY SEALED, STYLE FL88

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the filters described herein shall consist of this specification sheet and MIL-PRF-15733.


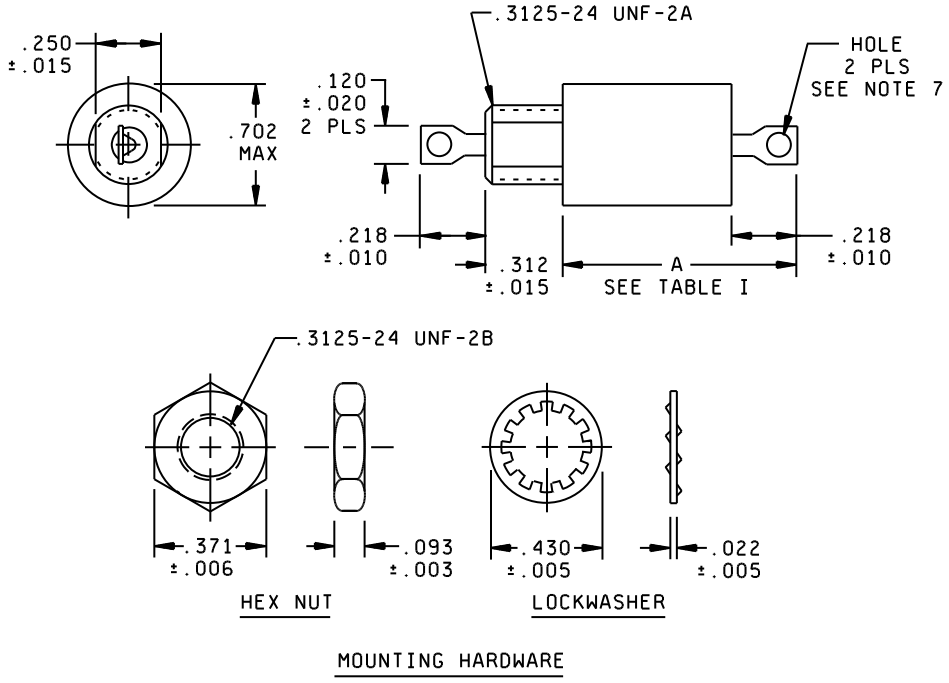


FIGURE 1. Case dimensions, mounting hardware, and circuit diagrams.

AMSC N/A

FSC 5915

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:29Z
Check the source to verify that this is the current version before use.

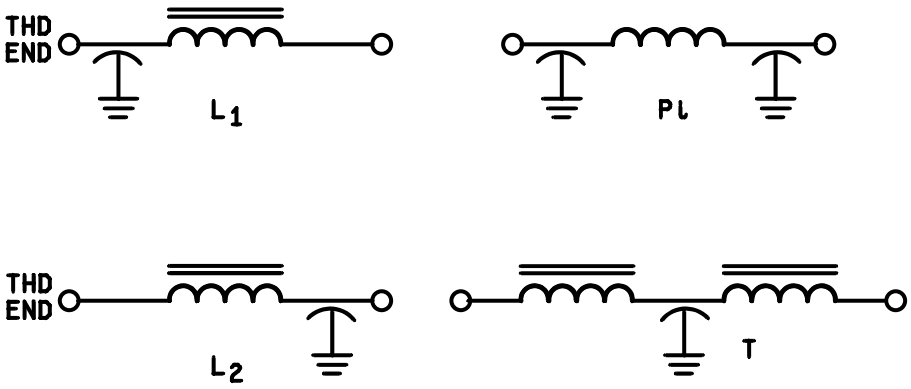

CIRCUIT DIAGRAMS

Inches	mm	Inches	mm
.003	0.08	.120	3.05
.005	0.13	.125	3.18
.006	0.15	.218	5.54
.010	0.25	.250	6.35
.015	0.38	.312	7.92
.020	0.51	.3125	7.938
.022	0.56	.371	9.42
.062	1.57	.430	10.92
.093	2.36	.702	17.83

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Circuit diagram is for information only.
4. All filters shall be supplied with mounting hardware.
5. Recommended mounting torque: 60 in.-oz. maximum.
6. Terminal identification (non-symmetrical filters): The case shall be marked at the threaded end of the filter, with the symbol “C” or the symbol “L”, as follows:

Circuit	Symbol
L_1	C
L_2	L

7. Terminal slot: .062 ± .015 x .125 ± .005

FIGURE 1. Case dimensions, mounting hardware, and circuit diagrams - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:29Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensions and electrical characteristics.

Dash number	Rated dc voltage (volts)	Rated current (amps)	Filter circuit	Dimensions A ±.030	Insulation resistance minimum (megohms)	Voltage drop (volts)	Insertion loss dB 1/					
							75 kHz	150 kHz	300 kHz	1 MHz	10 MHz	1 GHz
0001	100	.5	L_2	.875	300	.15	35	46	58	70	70	70
0002	100		L_1									
0003	100	1	L_2	.875	300	.21	30	40	52	70	70	70
0004	100		L_1									
0005	100	3	L_2	.875	700	.09	20	29	37	55	70	70
0006	100		L_1									
0007	100	5	L_2	.875	700	.035	20	28	34	46	70	70
0008	100		L_1									
0009	100	.5	Pi	1.170	350	.15	55	75	80	80	80	80
0010	100	1	Pi	1.170	350	.21	52	69	80	80	80	80
0011	100	3	Pi	1.170	350	.09	26	48	66	80	80	80
0012	100	5	Pi	1.170	350	.10	15	38	58	80	80	80
0013	100	2	T	1.170	700	.16	16	40	50	70	70	70

1/ No-load insertion loss measurement shall be performed at 75 kHz and 1 GHz. Full-load insertion loss measurement shall be performed from 150 kHz to 10 MHz.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:29Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Case: Metal.

Case and mounting hardware finish: In accordance with MIL-PRF-15733. Pure tin is prohibited as specified in MIL-PRF-15733.

Terminals: Solderable.

Operating temperature range: -55°C to +125°C.

Rated voltage: See table I.

Rated current: See table I.

Seal: In accordance with MIL-PRF-15733.

Temperature rise: In accordance with MIL-PRF-15733; 25°C, maximum.

Dielectric withstanding voltage: In accordance with MIL-PRF-15733. The following exception shall apply: The test voltage shall be 2.5 x rated dc voltage and shall be applied for 5 ±1 seconds.

Barometric pressure (reduced): In accordance with MIL-PRF-15733. The following exception shall apply:

Dielectric withstanding voltage shall be in accordance with initial requirements except the test voltage shall be 1.50 x rated dc voltage.

Insulation resistance: In accordance with MIL-PRF-15733 and in table I (at +25°C).

Voltage drop: In accordance with MIL-PRF-15733 and table I.

Insertion loss: In accordance with MIL-PRF-15733 and table I.

Terminal strength: In accordance with MIL-PRF-15733 and MIL-STD-202-211; test condition A.

Salt atmosphere (corrosion): In accordance with MIL-PRF-15733 and MIL-STD-202-101 test condition A.

Shock (specified pulse): In accordance with MIL-PRF-15733 and MIL-STD-202-213; test condition I.

Vibration (high frequency): In accordance with MIL-PRF-15733 and MIL-STD-202-204; test condition D (20 g).

Life: In accordance with MIL-PRF-15733 and MIL-STD-202-108; test condition D.

Part or Identifying Number (PIN): M15733/67- (dash number from table I).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:29Z
Check the source to verify that this is the current version before use.

Referenced documents. In addition to MIL-PRF-15733, this specification sheet references the following documents:

MIL-STD-202-101
MIL-STD-202-108
MIL-STD-202-204
MIL-STD-202-211
MIL-STD-202-213

Changes from previous issue. The margins of this specification sheet are marked with vertical line to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the previous issue.

Custodians:
Army - CR
Navy - EC
Air Force - 85
DLA - CC

Preparing activity:
DLA - CC

(Project 5915-2020-005)

Review activities:
Army - AT, AV
Navy - AS, MC, OS, SH
Air Force - 19

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:29Z
Check the source to verify that this is the current version before use.