NOTE: The document identifier and heading have been changed on this page to reflect that this is a performance specification. There are no other changes to this document. The document identifier on subsequent pages has not been changed, but will be changed the next time this document is revised.


MIL-PRF-15733/72A
19 November 1986
SUPERSEDING
MIL-F-15733/72
21 July 1982

PERFORMANCE SPECIFICATION SHEET


FILTERS, RADIO FREQUENCY INTERFERENCE, HERMETICALLY SEALED, STYLE FL54

This specification is approved for use by all Departments and Agencies of the Department of Defense.


The requirements for acquiring the filters described herein shall consist of this specification and the latest issue of MIL-F-15733.

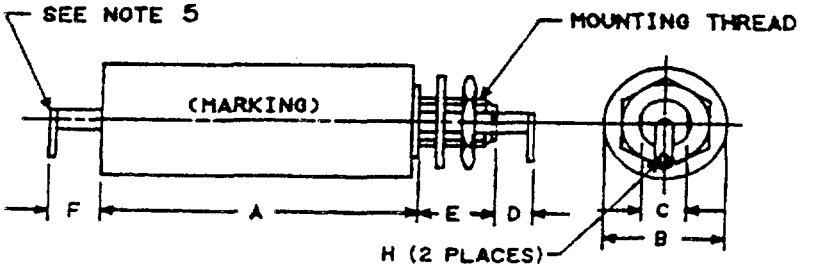

CONFIGURATION 1

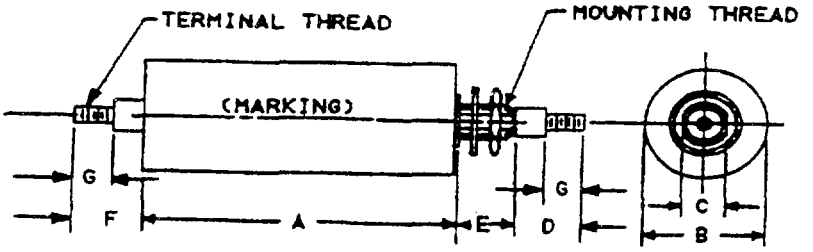

CONFIGURATION 2

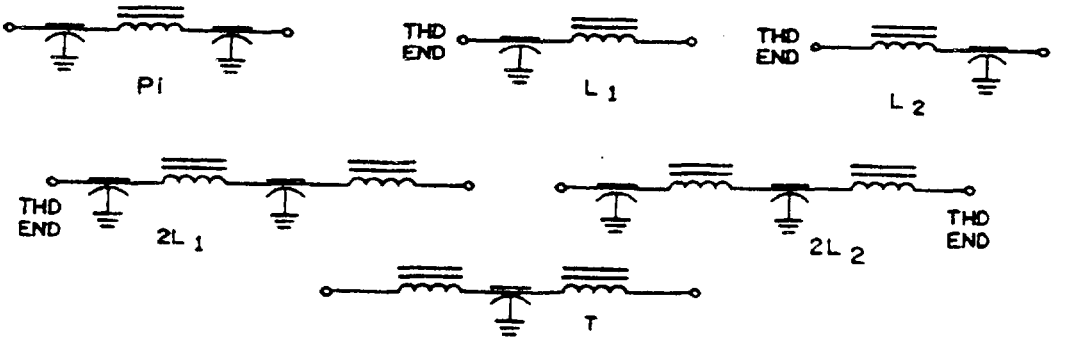

CIRCUIT DIAGRAMS

FIGURE 1. Case dimensions and circuit diagrams.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:31Z
Check the source to verify that this is the current version before use.

Dash No.	Configuration	Dimensions A Min	A Max	B Max	C Max	D Max	E Min	E Max	F Max	Mounting thread	Terminal thread	Terminal Thread Length G Min	G Max	Terminal Hole/Slot H ±.015 (0.38)
0001	1	1.32 (33.5)	1.44 (36.6)	.69 (17.5)	.211 (5.36)	.190 (4.83)	.230 (5.84)	.270 (6.86)	.190 (4.83)	.250-28 UNF-2A	NA	NA	NA	.062 (1.57)
0002	1	1.32 (33.5)	1.44 (36.6)	.69 (17.5)	.211 (5.36)	.190 (4.83)	.230 (5.84)	.270 (6.86)	.190 (4.83)	.250-28 UNF-2A	NA	NA	NA	.062 (1.57)
0003	1	1.75 (44.5)	1.87 (47.5)	1.02 (25.9)	.380 (9.65)	.250 (6.35)	.420 (10.67)	.460 (11.68)	.250 (6.35)	.4375-20 UNF-2A	NA	NA	NA	.093 X .187 (2.36) X (4.75)
0004	1	1.75 (44.5)	1.87 (47.5)	1.02 (25.9)	.380 (9.65)	.250 (6.35)	.420 (10.67)	.460 (11.68)	.250 (6.35)	.4375-20 UNF-2A	NA	NA	NA	.093 X .187 (2.36) X (4.75)
0005	1	1.57 (39.88)	1.69 (42.93)	.69 (17.5)	.211 (5.36)	.190 (4.83)	.230 (5.84)	.270 (6.86)	.190 (4.83)	.250-28 UNF-2A	NA	NA	NA	.062 (1.57)
0006	1	1.57 (39.88)	1.69 (42.93)	.69 (17.5)	.211 (5.36)	.190 (4.83)	.230 (5.84)	.270 (6.86)	.190 (4.83)	.250-28 UNF-2A	NA	NA	NA	.062 (1.57)
0007	1	1.63 (41.4)	1.75 (44.5)	1.02 (25.9)	.380 (9.65)	.250 (6.35)	.420 (10.67)	.460 (11.68)	.250 (6.35)	.4375-20 UNF-2A	NA	NA	NA	.093 X .187 (2.36) X (4.75)
0008	1	1.63 (41.4)	1.75 (44.5)	1.02 (25.9)	.380 (9.65)	.250 (6.35)	.420 (10.67)	.460 (11.68)	.250 (6.35)	.4375-20 UNF-2A	NA	NA	NA	.093 X .187 (2.36) X (4.75)
0009	1	1.88 (47.8)	2.00 (50.8)	.77 (19.6)	.260 (6.60)	.320 (8.13)	.260 (6.60)	.300 (7.62)	.320 (8.13)	.3125-24 UNF-2A	NA	NA	NA	.062 X .125 (1.57) X (3.18)
0010	1	1.88 (47.8)	2.00 (50.8)	.77 (19.6)	.260 (6.60)	.320 (8.13)	.260 (6.60)	.300 (7.62)	.320 (8.13)	.3125-24 UNF-2A	NA	NA	NA	.062 X .125 (1.57) X (3.18)
0011	1	2.75 (69.9)	2.87 (72.90)	1.27 (32.3)	.380 (9.65)	.250 (6.35)	.420 (10.67)	.460 (11.68)	.250 (6.35)	.4375-20 UNF-2A	NA	NA	NA	.093 X .187 (2.36) X (4.75)
0012	1	2.75 (69.9)	2.87 (72.90)	1.27 (32.3)	.380 (9.65)	.250 (6.35)	.420 (10.67)	.460 (11.68)	.250 (6.35)	.4375-20 UNF-2A	NA	NA	NA	.093 X .187 (2.36) X (4.75)
0013	1	2.00 (50.8)	2.12 (53.9)	1.15 (29.3)	.380 (9.65)	.250 (6.35)	.420 (10.67)	.460 (11.68)	.250 (6.35)	.4375-20 UNF-2A	NA	NA	NA	.093 X .187 (2.36) X (4.75)
0014	1	2.00 (50.8)	2.12 (53.9)	1.15 (29.2)	.380 (9.65)	.250 (6.35)	.420 (10.67)	.460 (11.68)	.250 (6.35)	.4375-20 UNF-2A	NA	NA	NA	.093 X .187 (2.36) X (4.75)
0015	2	2.54 (64.5)	2.68 (68.1)	1.52 (38.6)	.666 (16.92)	.690 (17.53)	.480 (12.19)	.520 (13.21)	.690 (17.53)	.750-20 UNEF-2A	.164-32 UNC-2A	.312	.375	NA
0016	2	2.54 (64.5)	2.68 (68.1)	1.52 (38.6)	.666 (16.92)	.690 (17.53)	.480 (12.19)	.520 (13.21)	.690 (17.53)	.750-20 UNEF-2A	.164-32 UNC-2A	.312	.375	NA
0017	1	2.44 (62.0)	2.56 (65.0)	.77 (19.6)	.260 (6.60)	.320 (8.13)	.260 (6.60)	.300 (7.62)	.320 (8.13)	.3125-24 UNF-2A	NA	NA	NA	.062 X .125 (1.57) X (3.18)
0018	1	2.44 (62.0)	2.56 (65.0)	.77 (19.6)	.260 (6.60)	.320 (8.13)	.260 (6.60)	.300 (7.62)	.320 (8.13)	.3125-24 UNF-2A	NA	NA	NA	.062 X .125 (1.57) X (3.18)
0019	1	2.56 (65.0)	2.68 (68.1)	.77 (19.6)	.260 (6.60)	.320 (8.13)	.260 (6.60)	.300 (7.62)	.320 (8.13)	.3125-24 UNF-2A	NA	NA	NA	.062 X .125 (1.57) X (3.18)
0020	1	2.56 (65.0)	2.68 (68.1)	.77 (19.6)	.260 (6.60)	.320 (8.13)	.260 (6.60)	.300 (7.62)	.320 (8.13)	.3125-24 UNF-2A	NA	NA	NA	.062 X .125 (1.57) X (3.18)
0021	1	2.81 (71.4)	2.93 (74.4)	1.15 (29.2)	.380 (9.65)	.250 (6.35)	.420 (10.67)	.460 (11.68)	.250 (6.35)	.4375-20 UNF-2A	NA	NA	NA	.093 X .187 (2.36) X (4.75)

FIGURE 1. Case dimensions and circuit diagrams - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:31Z
Check the source to verify that this is the current version before use.

Dash No.	Configuration	Dimensions										Terminal thread length		Terminal hole/slot
		A		B	C	D	E		F	Mounting thread	Terminal thread	G		H
		Min	Max	Max	Max	Max	Min	Max	Max			Min	Max	±.015 (0.38)
0022	1	2.81 (71.4)	2.93 (74.4)	1.15 (29.2)	.380 (9.65)	.250 (6.35)	.420 (10.67)	.460 (11.68)	.250 (6.35)	.4375-20 UNF-2A	NA	NA	NA	.093 X .187 (2.36) X (4.75)
0023	1	3.06 (77.7)	3.18 (80.8)	1.15 (29.2)	.380 (9.65)	.250 (6.35)	.420 (10.67)	.460 (11.68)	.250 (6.35)	.4375-20 UNF-2A	NA	NA	NA	.093 X .187 (2.36) X (4.75)
0024	1	3.06 (77.7)	3.18 (80.8)	1.15 (29.2)	.380 (9.65)	.250 (6.35)	.420 (10.67)	.460 (11.68)	.250 (6.35)	.4375-20 UNF-2A	NA	NA	NA	.093 X .187 (2.36) X (4.75)
0025	2	4.19 (106.4)	4.31 (109.5)	1.52 (38.6)	.666 (16.92)	.690 (17.53)	.480 (12.19)	.520 (13.21)	.690 (17.53)	.750-20 UNEF-2A	.164-32 UNC-2A	.312	.375	NA
0026	2	4.19 (106.4)	4.31 (109.5)	1.52 (38.6)	.666 (16.92)	.690 (17.53)	.480 (12.19)	.520 (13.21)	.690 (17.53)	.750-20 UNEF-2A	.164-32 UNC-2A	.312	.375	NA
0027	2	4.81 (122.2)	4.93 (125.2)	1.52 (38.6)	.666 (16.92)	.690 (17.53)	.480 (12.19)	.520 (13.21)	.690 (17.53)	.750-20 UNEF-2A	.164-32 UNC-2A	.312	.375	NA
0028	2	4.81 (122.2)	4.93 (125.2)	1.52 (38.6)	.666 (16.92)	.690 (17.53)	.480 (12.19)	.520 (13.21)	.690 (17.53)	.750-20 UNEF-2A	.164-32 UNC-2A	.312	.375	NA
0029	2	4.94 (125.5)	5.06 (128.5)	2.27 (57.7)	1.075 (27.31)	.810 (20.57)	.540 (13.72)	.580 (14.73)	.810 (20.57)	1.125-18 UNEF-2A	.190-32 UNF-2A	.312	.375	NA
0030	2	4.94 (125.5)	5.06 (128.5)	2.27 (57.7)	1.075 (27.31)	.810 (20.57)	.540 (13.72)	.580 (14.73)	.810 (20.57)	1.125-18 UNEF-2A	.190-32 UNF-2A	.312	.375	NA
0031	2	5.94 (150.9)	6.06 (153.9)	2.27 (57.7)	1.075 (27.31)	.880 (22.35)	.540 (13.72)	.580 (14.73)	.880 (22.35)	1.125-18 UNEF-2A	.250-20 UNC-2A	.48	.50	NA
0032	2	5.94 (150.9)	6.06 (153.9)	2.27 (57.7)	1.075 (27.31)	.880 (22.35)	.540 (13.72)	.580 (14.73)	.880 (22.35)	1.125-18 UNEF-2A	.250-20 UNC-2A	.48	.50	NA
0033	1	1.88 (47.8)	2.00 (50.8)	.69 (17.5)	.211 (5.36)	.190 (4.83)	.230 (5.84)	.270 (6.86)	.190 (4.83)	.250-28 UNF-2A	NA	NA	NA	.062 (1.57)
0034	1	2.07 (52.6)	2.19 (55.6)	.77 (19.6)	.260 (6.60)	.320 (8.13)	.260 (6.60)	.300 (7.62)	.320 (8.13)	.3125-24 UNF-2A	NA	NA	NA	.062 X .125 (1.57) X (3.18)
0035	1	2.19 (55.6)	2.31 (58.7)	1.02 (25.9)	.380 (9.65)	.250 (6.35)	.420 (10.67)	.460 (11.68)	.250 (6.35)	.4375-20 UNF-2A	NA	NA	NA	.093 X .187 (2.36) X (4.75)
0036	1	1.88 (47.8)	2.00 (50.8)	.69 (17.5)	.211 (5.36)	.190 (4.83)	.230 (5.84)	.270 (6.86)	.190 (4.83)	.250-28 UNF-2A	NA	NA	NA	.062 (1.57)
0037	1	2.26 (57.4)	2.38 (60.5)	.77 (19.6)	.260 (6.60)	.320 (8.13)	.260 (6.60)	.300 (7.62)	.320 (8.13)	.3125-24 UNF-2A	NA	NA	NA	.062 X .125 (1.57) X (3.18)
0038	1	2.44 (62.0)	2.56 (65.8)	1.02 (25.9)	.380 (9.65)	.250 (6.35)	.420 (10.67)	.460 (11.68)	.250 (6.35)	.4375-20 UNF-2A	NA	NA	NA	.093 X .187 (2.36) X (4.75)
0039	1	2.32 (58.9)	2.44 (62.0)	.77 (19.6)	.260 (6.60)	.320 (8.13)	.260 (6.60)	.300 (7.62)	.320 (8.13)	.3125-24 UNF-2A	NA	NA	NA	.062 X .125 (1.57) X (3.18)
0040	1	2.32 (58.9)	2.44 (62.0)	1.15 (29.2)	.380 (9.65)	.250 (6.35)	.420 (10.67)	.460 (11.68)	.250 (6.35)	.4375-20 UNF-2A	NA	NA	NA	.093 X .187 (2.36) X (4.75)
0041	1	4.13 (104.9)	4.25 (108.0)	1.27 (32.3)	.380 (9.65)	.250 (6.35)	.420 (10.67)	.460 (11.68)	.250 (6.35)	.4375-20 UNF-2A	NA	NA	NA	.093 X .187 (2.36) X (4.75)

FIGURE 1. Case dimensions and circuit diagrams - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:31Z
Check the source to verify that this is the current version before use.

Dash No.	Config-uration	Dimensions A Min	A Max	B Max	C Max	D Max	E Min	E Max	F Max	Mounting thread	Terminal thread	Terminal Thread Length G Min	G Max	Terminal Hole/Slot H ± .015 (0.38)
0042	1	2.19 (55.6)	2.31 (58.7)	1.15 (29.2)	.380 (9.65)	.250 (6.35)	.420 (10.67)	.460 (11.68)	.250 (6.35)	.4375-20 UNF-2A	NA	NA	NA	.093 x .187 (2.36) x (4.75)
0043	1	2.57 (65.3)	2.69 (68.3)	1.15 (29.2)	.380 (9.65)	.250 (6.35)	.420 (10.67)	.460 (11.68)	.250 (6.35)	.4375-20 UNF-2A	NA	NA	NA	.093 x .187 (2.36) x (4.75)
0044	2	3.82 (97.0)	3.94 (100.1)	1.52 (38.6)	.666 (16.92)	.690 (17.53)	.480 (12.19)	.520 (13.21)	.690 (17.53)	.750-20 UNEF-2A	.164-32 UNC-2A	.312	.375	NA
0045	1	2.50 (63.6)	2.62 (66.5)	1.27 (32.3)	.380 (9.65)	.250 (6.35)	.420 (10.67)	.460 (11.68)	.250 (6.35)	.4375-20 UNF-2A	NA	NA	NA	.093 x .187 (2.36) x (4.75)
0046	2	3.44 (87.4)	3.56 (90.4)	1.52 (38.6)	.666 (16.92)	.690 (17.53)	.480 (12.19)	.520 (13.21)	.690 (17.53)	.750-20 UNEF-2A	.164-32 UNC-2A	.312	.375	NA
0047	2	3.82 (97.0)	3.94 (100.1)	2.27 (57.7)	1.075 (27.31)	.690 (17.53)	.540 (13.72)	.580 (14.73)	.690 (17.53)	1.125-18 UNEF-2A	.164-32 UNC-2A	.312	.375	NA
0048	2	3.19 (81.0)	3.31 (84.1)	1.27 (32.3)	.540 (13.72)	.690 (17.53)	.480 (12.19)	.520 (13.21)	.690 (17.53)	.625-24 UNEF-2A	.164-32 UNC-2A	.312	.375	NA
0049	2	3.83 (97.3)	3.95 (100.3)	1.52 (38.6)	.666 (16.92)	.690 (17.53)	.480 (12.19)	.520 (13.21)	.690 (17.53)	.750-20 UNEF-2A	.164-32 UNC-2A	.312	.375	NA
0050	2	3.94 (100.1)	4.06 (103.1)	2.27 (57.7)	1.075 (27.31)	.810 (20.57)	.540 (13.72)	.580 (14.73)	.810 (20.57)	1.125-18 UNEF-2A	.190-32 UNF-2A	.312	.375	NA
0051	2	3.94 (100.1)	4.06 (103.1)	2.27 (57.7)	1.075 (27.31)	.810 (20.57)	.540 (13.72)	.580 (14.73)	.810 (20.57)	1.125-18 UNEF-2A	.190-32 UNF-2A	.312	.375	NA
0052	2	3.94 (100.1)	4.06 (103.1)	2.27 (57.7)	1.075 (27.31)	.880 (20.57)	.540 (13.72)	.580 (14.73)	.880 (22.35)	1.125-18 UNEF-2A	.250-20 UNC-2A	.44	.50	NA
0053	2	4.44 (112.8)	4.57 (116.1)	2.27 (57.7)	1.075 (27.31)	.880 (20.57)	.540 (13.72)	.580 (14.73)	.880 (22.35)	1.125-18 UNEF-2A	.250-20 UNC-2A	.44	.50	NA
0054	1	1.88 (47.8)	2.00 (50.8)	.69 (17.5)	.211 (5.36)	.190 (4.83)	.230 (5.84)	.270 (6.86)	.190 (4.83)	.250-28 UNF-2A	NA	NA	NA	.062 (1.57)
0055	1	2.19 (55.6)	2.31 (58.7)	1.02 (25.9)	.380 (9.65)	.250 (6.35)	.420 (10.67)	.460 (11.68)	.250 (6.35)	.4375-20 UNF-2A	NA	NA	NA	.093 x .187 (2.36) x (4.75)
0056	1	1.88 (47.8)	2.00 (50.8)	.69 (17.5)	.211 (5.36)	.190 (4.83)	.230 (5.84)	.270 (6.86)	.190 (4.83)	.250-28 UNF-2A	NA	NA	NA	.062 (1.57)
0057	1	2.81 (71.4)	2.93 (74.4)	1.02 (25.9)	.380 (9.65)	.250 (6.35)	.420 (10.67)	.460 (11.68)	.250 (6.35)	.4375-20 UNF-2A	NA	NA	NA	.093 x .187 (2.36) x (4.75)
0058	1	2.32 (58.9)	2.44 (62.0)	.77 (19.6)	.260 (6.50)	.320 (8.13)	.260 (6.60)	.300 (7.62)	.320 (8.13)	.3125-24 UNF-2A	NA	NA	NA	.062 x .125 (1.57) x (3.18)
0059	1	4.13 (104.9)	4.25 (108.0)	1.27 (32.3)	.380 (9.65)	.250 (6.35)	.420 (10.67)	.460 (11.68)	.250 (6.35)	.4375-20 UNF-2A	NA	NA	NA	.093 x .187 (2.36) x (4.75)
0060	1	2.19 (55.6)	2.31 (58.7)	1.15 (29.2)	.380 (9.65)	.250 (6.35)	.420 (10.67)	.460 (11.68)	.250 (6.35)	.4375-20 UNF-2A	NA	NA	NA	.093 x .187 (2.36) x (4.75)
0061	2	3.82 (97.0)	3.94 (100.1)	1.52 (38.6)	.666 (16.92)	.690 (17.53)	.480 (12.19)	.520 (13.21)	.690 (17.53)	.750-20 UNEF-2A	.164-32 UNC-2A	.312	.375	NA

FIGURE 1. Case dimensions and circuit diagrams - Continued.

MIL-F-15733/72A

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:31Z
Check the source to verify that this is the current version before use.

MIL-F-15733 Type No.	Config-uration	Dimensions A Min	A Max	B Max	C Max	D Max	E Min	E Max	F Max	Mounting thread	Terminal thread	Terminal Thread Length G Min	G Max	Terminal Hole/Slot H ± .015 (0.38)
10062	1	2.69 (68.3)	2.81 (71.4)	1.27 (32.3)	.380 (9.65)	.250 (6.35)	.420 (10.67)	.460 (11.68)	.250 (6.35)	.4375-20 UNF-2A	NA	NA	NA	.093 X .187 (2.36) X (4.75)
10063	2	3.82 (97.0)	3.94 (100.1)	1.77 (45.0)	.666 (16.92)	.690 (17.53)	.480 (12.19)	.520 (13.21)	.690 (17.53)	.750-20 UNEF-2A	.164-32 UNC-2A	.312	.375	NA
10064	2	3.19 (81.0)	3.31 (84.1)	1.27 (32.3)	.540 (13.72)	.690 (17.53)	.480 (12.19)	.520 (13.21)	.690 (17.53)	.625-24 UNEF-2A	.164-32 UNC-2A	.312	.375	NA
10065	2	3.94 (100.1)	4.06 (103.1)	1.52 (38.6)	.666 (16.92)	.690 (17.53)	.480 (12.19)	.520 (13.21)	.690 (17.53)	.750-20 UNEF-2A	.164-32 UNC-2A	312	375	NA
10066	2	4.44 (112.8)	4.56 (115.8)	2.27 (57.7)	1.075 (27.3)	.810 (20.57)	.540 (13.72)	.580 (14.73)	.810 (20.57)	1.125-18 UNEF-2A	.190-32 UNF-2A	.312	.375	NA
10067	2	4.69 (119.1)	4.81 (122.2)	2.27 (57.7)	1.075 (27.3)	.810 (20.57)	.540 (13.72)	.580 (14.73)	.810 (20.57)	1.125-18 UNEF-2A	.190-32 UNF-2A	.312	.375	NA
10068	2	4.44 (112.8)	4.56 (115.8)	2.27 (57.7)	1.075 (27.3)	.880 (22.35)	.540 (13.72)	.580 (14.73)	.880 (22.35)	1.125-18 UNEF-2A	.250-20 UNC-2A	.44	.50	NA
10069	2	5.44 (138.2)	5.56 (141.2)	2.27 (57.7)	1.075 (27.3)	.880 (22.35	.540 (13.72)	.580 (14.73)	.880 (22.35)	1.125-18 UNEF-2A	.250-20 UNC-2A	.44	.50	NA

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Circuit diagram is for information only.
4. Mounting hardware shall be supplied with filter.
5. Terminal identification (non-symmetrical filters): The case shall be marked at the threaded end of the filter, with the symbol "C" or the symbol "L" as follows:

Circuit	Symbol
L_1	C
L_2	L
$2L_1$	C
$2L_2$	L

Inches	mm
.312	7.92
.375	9.53
.44	11.2
.50	12.7

6. Angle or bend of terminals for configuration 1 is optional.
7. Solderability is not applicable to configuration 2.
8. Recommended mounting torque:

Mounting thread	Recommended torque
.250 - 28	20 to 25 in-lb
.3125 - 24	25 to 30 in-lb
.4375 - 20	60 to 70 in-lb
.625 - 24	100 to 115 in-lb
.750 - 20	120 to 140 in-lb
1.125 - 18	150 to 175 in-lb

FIGURE 1. Case dimensions and circuit diagrams - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:31Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Circuit diagrams and dimensions: See figure 1 and table I.

Case: Metal.

Rated voltage: 100 volts dc, 30 volts ac, from dc to 400 Hz.

Rated current: See table I.

Insertion loss:

At +25°C shall be as specified in table I.
At -55°C and +125°C the insertion loss shall be as specified in table I except up to 10 MHz, a degradation of 2 dB from the value specified in table I shall be allowed.

Operating temperature range: -55°C to +125°C.

Seal: Method 112, test condition A of MIL-STD-202.

Temperature rise:

25°C for parts rated up to and including 10 amperes.
35°C for parts rated above 10 amperes.

Maximum voltage drop: 1.0 volts ac (rms) and dc.

Insulation resistance: Insulation resistance shall be not less than 1,000 megohms minimum at 25°C, and shall be not less than 100 megohms minimum at 125°C.

Terminal strength: Method 211 of MIL-STD-202.

Configuration 1: Test condition A, applied force shall be 5 pounds.
Configuration 2: Test condition E, torque shall be as specified in MIL-F-15733.

Thermal shock and immersion:

Thermal shock: Method 107, test condition A of MIL-STD-202, except the temperature at step 3 shall be +125°C.

Immersion: Method 104, test condition A of MIL-STD-202.

Measurements after final cycle:

Dielectric withstanding voltage: 90 percent of the initial voltage applied for 5 ±1 seconds. Maximum charging current, 50 milliamperes.

Insulation resistance: Shall be not less than 30 percent of the initial value.

Insertion loss (check test): Shall meet initial requirements.

Shock (specified pulse): Method 213, test condition I of MIL-STD-202.

Electrical load: 100 percent of the rated voltage shall be applied between terminals and case.

Vibration (high frequency): Method 204, test condition B of MIL-STD-202.

Electrical load: Rated voltage and rated current shall be applied continuously during test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:31Z
Check the source to verify that this is the current version before use.

Test during vibration: During the last cycle in each direction, an electrical measurement shall be made to determine intermittent open or short-circuiting. After vibration test, filters shall meet the initial requirements of insertion loss (check test).

Moisture resistance: Method 107, test condition A of MIL-STD-202, except that the temperature of step 3 shall be +125°C. No measurements shall be made before and after cycling. Filters shall then be tested in accordance with method 106 of MIL-STD-202.

Initial measurements: Not applicable.

Polarization voltage: 100 volts dc.

Measurements after 24-hour drying period.

Dielectric withstanding voltage: 90 percent of the initial voltage shall be applied for 5 ±1 seconds. Maximum charging current, 50 milliamperes.

Insulation resistance: Shall meet the initial requirements.

Insertion loss (check test): Shall meet the initial requirements.

Life: Method 108, test condition B of MIL-STD-202.

Test voltage: 1.4 times rated dc voltage at +125°C.

Measurements after test:

Dielectric withstanding voltage: 90 percent of the initial voltage applied for 5 ±1 seconds.

Insulation resistance: Shall be not less than 30 percent of the initial requirement.

Insertion loss (check test): Shall meet initial requirements.

Part number: M15733/72- (dash number from table I).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:31Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics.

Dash number	Circuit diagram	Rated current (amps) ac (rms) or dc	Minimum insertion loss (dB) in accordance with MIL-STD-220 1/ At +25°C									
			14 kHz	20 kHz	50 kHz	150 kHz	300 kHz	600 kHz	1 MHz	10 MHz	100 MHz	1 GHz
0001	L_1	.5	---	---	---	30	40	50	60	60	60	60
0002	L_2	"	---	---	---	30	40	50	"	"	"	"
0003	L_1	"	---	---	---	50	60	60	"	"	"	"
0004	L_2	"	---	---	---	50	60	60	"	"	"	"
0005	L_1	1.0	---	---	---	30	40	50	"	"	"	"
0006	L_2	"	---	---	---	30	40	50	"	"	"	"
0007	L_1	"	---	---	---	50	60	60	"	"	"	"
0008	L_2	"	---	---	---	50	60	60	"	"	"	"
0009	L_1	3.0	---	---	---	30	40	50	"	"	"	"
0010	L_2	"	---	---	---	30	40	50	"	"	"	"
0011	L_1	"	---	---	---	40	50	60	"	"	"	"
0012	L_2	"	---	---	---	40	50	60	"	"	"	"
0013	L_1	5.0	---	---	---	30	40	50	"	"	"	"
0014	L_2	"	---	---	---	30	40	50	"	"	"	"
0015	L_1	"	---	---	---	40	50	60	"	"	"	"
0016	L_2	"	---	---	---	40	50	60	"	"	"	"
0017	$2L_1$	.5	---	10	40	75	80	80	80	80	80	80
0018	$2L_2$	.5	---	10	40	75	80	80	80	80	80	80

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:31Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics - Continued.

Dash number	Circuit diagram	Rated current (amps) ac (rms) or dc	Minimum insertion loss (dB) in accordance with MIL-STD-220 1/									
			At +25°C									
			14 kHz	20 kHz	50 kHz	150 kHz	300 kHz	600 kHz	1 MHz	10 MHz	100 MHz	1 GHz
0019	$2L_1$	1.0	---	10	40	75	80	80	80	80	80	80
0020	$2L_2$	1.0	---	10	40	75	"	"	"	"	"	"
0021	$2L_1$	3.0	---	---	30	65	"	"	"	"	"	"
0022	$2L_2$	3.0	---	---	"	"	"	"	"	"	"	"
0023	$2L_1$	5.0	---	---	"	"	"	"	"	"	"	"
0024	$2L_2$	5.0	---	---	"	"	"	"	"	"	"	"
0025	$2L_1$	10.0	---	---	"	"	"	"	"	"	"	"
0026	$2L_2$	10.0	---	---	"	"	"	"	"	"	"	"
0027	$2L_1$	20.0	---	---	10	55	"	"	"	"	"	"
0028	$2L_2$	20.0	---	---	"	"	"	"	"	"	"	"
0029	$2L_1$	30.0	---	---	"	"	"	"	"	"	"	"
0030	$2L_2$	30.0	---	---	"	"	"	"	"	"	"	"
0031	$2L_1$	50.0	---	---	"	"	"	"	"	"	"	"
0032	$2L_2$	50.0	---	---	"	"	"	"	"	"	"	"
0033	Pi	.5	---	---	---	40	60	75	"	"	"	"
0034	"	.5	---	---	---	60	80	80	"	"	"	"
0035	"	.5	---	---	---	80	80	80	"	"	"	"
0036	"	1	---	---	---	40	60	75	"	"	"	"

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:31Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics - Continued.

Dash number	Circuit diagram	Rated current (amps) ac (rms) or dc	Minimum insertion loss (dB) in accordance with MIL-STD-220 1/ At +25°C									
			14 kHz	20 kHz	50 kHz	150 kHz	300 kHz	600 kHz	1 MHz	10 MHz	100 MHz	1 GHz
0037	Pi	1	---	---	---	60	80	80	80	80	80	80
0038	"	1	---	---	---	80	80	80	"	"	"	"
0039	"	3	---	---	---	40	60	75	"	"	"	"
0040	"	3	---	---	---	60	80	80	"	"	"	"
0041	"	3	---	---	---	80	80	80	"	"	"	"
0042	"	5	---	---	---	40	60	75	"	"	"	"
0043	"	5	---	---	---	60	80	80	"	"	"	"
0044	"	5	---	---	---	80	80	80	"	"	"	"
0045	"	10	---	---	---	40	60	75	"	"	"	"
0046	"	10	---	---	---	60	80	80	"	"	"	"
0047	"	10	---	---	---	80	80	80	"	"	"	"
0048	"	20	---	---	---	40	60	75	"	"	"	"
0049	"	20	---	---	---	60	80	80	"	"	"	"
0050	"	30.0	---	---	---	40	60	75	"	"	"	"
0051	"	30.0	---	---	---	60	80	80	"	"	"	"
0052	"	50.0	---	---	---	40	60	75	"	"	"	"
0053	"	50.0	---	---	---	60	80	80	"	"	"	"

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:31Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics - Continued.

Dash number	Circuit diagram	Rated current (amps) ac (rms) or dc	Minimum insertion loss (dB) in accordance with MIL-STD-220 1/ At +25°C									
			14 kHz	20 kHz	50 kHz	150 kHz	300 kHz	600 kHz	1 MHz	10 MHz	100 MHz	1 GHz
0054	T	.5	---	---	---	45	60	70	70	70	70	70
0055	"	.5	20	28	50	60	60	60	60	"	"	"
0056	"	1.0	---	---	---	35	50	60	70	"	"	"
0057	"	1.0	20	28	50	60	60	60	60	"	"	"
0058	"	3.0	---	---	---	25	35	45	"	"	"	"
0059	"	3.0	20	26	45	60	60	60	"	"	"	"
0060	"	5.0	---	---	---	25	35	45	"	"	"	"
0061	"	5.0	20	26	45	60	60	60	"	"	"	"
0062	"	10.0	---	---	---	25	35	45	50	"	"	"
0063	"	10.0	15	18	28	37	45	53	58	"	"	"
0064	"	20.0	---	---	---	25	35	45	50	"	"	"
0065	"	20.0	15	18	28	37	45	53	58	"	"	"
0066	"	30.0	---	---	---	25	35	45	50	"	"	"
0067	"	30.0	15	18	28	37	45	53	58	"	"	"
0068	"	50.0	---	---	---	25	35	45	50	"	"	"
0069	"	50.0	15	18	28	37	43	50	58	"	"	"

1/ Full-load insertion loss measurements shall be performed over the frequency range of 100 kHz to 20 MHz inclusive. Measurements below or above this frequency range shall be performed at no-load.

Revision letters are not used to denote changes due to the extensiveness of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:31Z
Check the source to verify that this is the current version before use.

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - AR, MI
Navy - SH
Air Force - 11, 99
DLA - ES

User activities:
Army - AT, AV, ME
Navy - AS, MC, OS
Air Force - 19

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5915-0312)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:31Z
Check the source to verify that this is the current version before use.