INCH-POUND

MIL-PRF-15733/72C
14 march 2008
SUPERSEDING
MIL-PRF-15733/72B
8 May 2003

PERFORMANCE SPECIFICATION SHEET

FILTERS, RADIO FREQUENCY INTERFERENCE, HERMETICALLY SEALED, STYLE FL54

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the filters described herein shall consist of this specification sheet and the latest issue of MIL-PRF-15733.

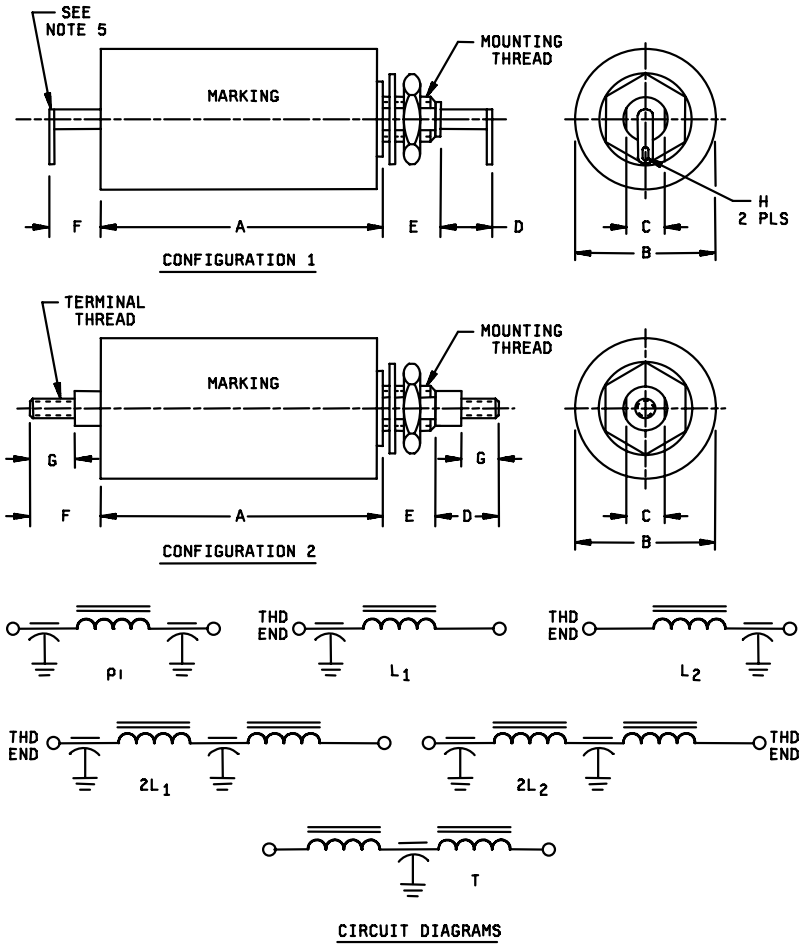


FIGURE 1. Case dimensions and circuit diagrams.

AMSC N/A

FSC 5915

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:31Z
Check the source to verify that this is the current version before use.

Dash number	Config-uration	Dimensions									Terminal thread	Terminal thread length		Terminal hole/Slot
		A		B	C	D	E		F	Mounting thread		G		H
		Min	Max	Max	Max	Max	Min	Max	Max			Min	Max	±.015 (0.38)
0001	1	1.32 (33.5)	1.44 (36.6)	.69 (17.5)	.211 (5.36)	.190 (4.83)	.230 (5.84)	.270 (6.86)	.190 (4.83)	.250-28 UNF-2A	NA	NA	NA	.062 (1.57)
0002	1	1.32 (33.5)	1.44 (36.6)	.69 (17.5)	.211 (5.36)	.190 (4.83)	.230 (5.84)	.270 (6.86)	.190 (4.83)	.250-28 UNF-2A	NA	NA	NA	.062 (1.57)
0003	1	1.75 (44.5)	1.87 (47.5)	1.02 (25.9)	.380 (9.65)	.250 (6.35)	.420 (10.67)	.460 (11.68)	.250 (6.35)	.4375-20 UNF-2A	NA	NA	NA	.093 X .187 (2.36) X (4.75)
0004	1	1.75 (44.5)	1.87 (47.5)	1.02 (25.9)	.380 (9.65)	.250 (6.35)	.420 (10.67)	.460 (11.68)	.250 (6.35)	.4375-20 UNF-2A	NA	NA	NA	.093 X .187 (2.36) X (4.75)
0005	1	1.57 (39.9)	1.69 (42.93)	.69 (17.5)	.211 (5.36)	.190 (4.83)	.230 (5.84)	.270 (6.86)	.190 (4.83)	.250-28 UNF-2A	NA	NA	NA	.062 (1.57)
0006	1	1.57 (39.9)	1.69 (42.93)	.69 (17.5)	.211 (5.36)	.190 (4.83)	.230 (5.84)	.270 (6.86)	.190 (4.83)	.250-28 UNF-2A	NA	NA	NA	.062 (1.57)
0007	1	1.63 (41.4)	1.75 (44.5)	1.02 (25.9)	.380 (9.65)	.250 (6.35)	.420 (10.67)	.460 (11.68)	.250 (6.35)	.4375-20 UNF-2A	NA	NA	NA	.093 X .187 (2.36) X (4.75)
0008	1	1.63 (41.4)	1.75 (44.5)	1.02 (25.9)	.380 (9.65)	.250 (6.35)	.420 (10.67)	.460 (11.68)	.250 (6.35)	.4375-20 UNF-2A	NA	NA	NA	.093 X .187 (2.36) X (4.75)
0009	1	1.88 (47.8)	2.00 (50.8)	.77 (19.6)	.260 (6.60)	.320 (8.13)	.260 (6.60)	.300 (7.62)	.320 (8.13)	.3125-24 UNF-2A	NA	NA	NA	.062 X .125 (1.57) X (3.18)
0010	1	1.88 (47.8)	2.00 (50.8)	.77 (19.6)	.260 (6.60)	.320 (8.13)	.260 (6.60)	.300 (7.62)	.320 (8.13)	.3125-24 UNF-2A	NA	NA	NA	.062 X .125 (1.57) X (3.18)
0011	1	2.75 (69.9)	2.87 (72.90)	1.27 (32.3)	.380 (9.65)	.250 (6.35)	.420 (10.67)	.460 (11.68)	.250 (6.35)	.4375-20 UNF-2A	NA	NA	NA	.093 X .187 (2.36) X (4.75)
0012	1	2.75 (69.9)	2.87 (72.90)	1.27 (32.3)	.380 (9.65)	.250 (6.35)	.420 (10.67)	.460 (11.68)	.250 (6.35)	.4375-20 UNF-2A	NA	NA	NA	.093 X .187 (2.36) X (4.75)
0013	1	2.00 (50.8)	2.12 (53.9)	1.15 (29.3)	.380 (9.65)	.250 (6.35)	.420 (10.67)	.460 (11.68)	.250 (6.35)	.4375-20 UNF-2A	NA	NA	NA	.093 X .187 (2.36) X (4.75)
0014	1	2.00 (50.8)	2.12 (53.9)	1.15 (29.3)	.380 (9.65)	.250 (6.35)	.420 (10.67)	.460 (11.68)	.250 (6.35)	.4375-20 UNF-2A	NA	NA	NA	.093 X .187 (2.36) X (4.75)
0015	2	2.54 (64.5)	2.68 (68.1)	1.52 (38.6)	.666 (16.92)	.690 (17.53)	.480 (12.19)	.520 (13.21)	.690 (17.53)	.750-20 UNEF-2A	.164-32 UNC-2A	.312 (7.92)	.375 (9.53)	NA
0016	2	2.54 (64.5)	2.68 (68.1)	1.52 (38.6)	.666 (16.92)	.690 (17.53)	.480 (12.19)	.520 (13.21)	.690 (17.53)	.750-20 UNEF-2A	.164-32 UNC-2A	.312 (7.92)	.375 (9.53)	NA
0017	1	2.44 (62.0)	2.56 (65.0)	.77 (19.6)	.260 (6.60)	.320 (8.13)	.260 (6.60)	.300 (7.62)	.320 (8.13)	.3125-24 UNF-2A	NA	NA	NA	.062 X .125 (1.57) X (3.18)
0018	1	2.44 (62.0)	2.56 (65.0)	.77 (19.6)	.260 (6.60)	.320 (8.13)	.260 (6.60)	.300 (7.62)	.320 (8.13)	.3125-24 UNF-2A	NA	NA	NA	.062 X .125 (1.57) X (3.18)
0019	1	2.56 (65.0)	2.68 (68.1)	.77 (19.6)	.260 (6.60)	.320 (8.13)	.260 (6.60)	.300 (7.62)	.320 (8.13)	.3125-24 UNF-2A	NA	NA	NA	.062 X .125 (1.57) X (3.18)
0020	1	2.56 (65.0)	2.68 (68.1)	.77 (19.6)	.260 (6.60)	.320 (8.13)	.260 (6.60)	.300 (7.62)	.320 (8.13)	.3125-24 UNF-2A	NA	NA	NA	.062 X .125 (1.57) X (3.18)
0021	1	2.81 (71.4)	2.93 (74.4)	1.15 (29.2)	.380 (9.65)	.250 (6.35)	.420 (10.67)	.460 (11.68)	.250 (6.35)	.4375-20 UNF-2A	NA	NA	NA	.093 X .187 (2.36) X (4.75)

FIGURE 1. Case dimensions and circuit diagrams - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:31Z
Check the source to verify that this is the current version before use.

Dash number	Config-uration	Dimensions									Terminal thread	Terminal thread length		Terminal hole/Slot
		A		B	C	D	E		F	Mounting thread		G		H
		Min	Max	Max	Max	Max	Min	Max	Max			Min	Max	±.015 (0.38)
0022	1	2.81 (71.4)	2.93 (74.4)	1.15 (29.2)	.380 (9.65)	.250 (6.35)	.420 (10.67)	.460 (11.68)	.250 (6.35)	.4375-20 UNF-2A	NA	NA	NA	.093 X .187 (2.36) X (4.75)
0023	1	3.06 (77.7)	3.18 (80.8)	1.15 (29.2)	.380 (9.65)	.250 (6.35)	.420 (10.67)	.460 (11.68)	.250 (6.35)	.4375-20 UNF-2A	NA	NA	NA	.093 X .187 (2.36) X (4.75)
0024	1	3.06 (77.7)	3.18 (80.8)	1.15 (29.2)	.380 (9.65)	.250 (6.35)	.420 (10.67)	.460 (11.68)	.250 (6.35)	.4375-20 UNF-2A	NA	NA	NA	.093 X .187 (2.36) X (4.75)
0025	2	4.19 (106.4)	4.31 (109.5)	1.52 (38.6)	.666 (16.92)	.690 (17.53)	.480 (12.19)	.520 (13.21)	.690 (17.53)	.750-20 UNEF-2A	.164-32 UNC-2A	.312 (7.92)	.375 (9.53)	NA
0026	2	4.19 (106.4)	4.31 (109.5)	1.52 (38.6)	.666 (16.92)	.690 (17.53)	.480 (12.19)	.520 (13.21)	.690 (17.53)	.750-20 UNEF-2A	.164-32 UNC-2A	.312 (7.92)	.375 (9.53)	NA
0027	2	4.81 (122.2)	4.93 (125.2)	1.52 (38.6)	.666 (16.92)	.690 (17.53)	.480 (12.19)	.520 (13.21)	.690 (17.53)	.750-20 UNEF-2A	.164-32 UNC-2A	.312 (7.92)	.375 (9.53)	NA
0028	2	4.81 (122.2)	4.93 (125.2)	1.52 (38.6)	.666 (16.92)	.690 (17.53)	.480 (12.19)	.520 (13.21)	.690 (17.53)	.750-20 UNEF-2A	.164-32 UNC-2A	.312 (7.92)	.375 (9.53)	NA
0029	2	4.94 (125.5)	5.06 (128.5)	2.27 (57.7)	1.075 (27.31)	.810 (20.57)	.540 (13.72)	.580 (14.73)	.810 (20.57)	1.125-18 UNEF-2A	.190-32 UNF-2A	.312 (7.92)	.375 (9.53)	NA
0030	2	4.94 (125.5)	5.06 (128.5)	2.27 (57.7)	1.075 (27.31)	.810 (20.57)	.540 (13.72)	.580 (14.73)	.810 (20.57)	1.125-18 UNEF-2A	.190-32 UNF-2A	.312 (7.92)	.375 (9.53)	NA
0031	2	5.94 (150.9)	6.06 (153.9)	2.27 (57.7)	1.075 (27.31)	.880 (22.35)	.540 (13.72)	.580 (14.73)	.880 (22.35)	1.125-18 UNEF-2A	.250-20 UNC-2A	.44 (11.2)	.50 (12.7)	NA
0032	2	5.94 (150.9)	6.06 (153.9)	2.27 (57.7)	1.075 (27.31)	.880 (22.35)	.540 (13.72)	.580 (14.73)	.880 (22.35)	1.125-18 UNEF-2A	.250-20 UNC-2A	.44 (11.2)	.50 (12.7)	NA
0033	1	1.88 (47.8)	2.00 (50.8)	.69 (17.5)	.211 (5.36)	.190 (4.83)	.230 (5.84)	.270 (6.86)	.190 (4.83)	.250-28 UNF-2A	NA	NA	NA	.062 (1.57)
0034	1	2.07 (52.6)	2.19 (55.6)	.77 (19.6)	.260 (6.60)	.320 (8.13)	.260 (6.60)	.300 (7.62)	.320 (8.13)	.3125-24 UNF-2A	NA	NA	NA	.062 X .125 (1.57) X (3.18)
0035	1	2.19 (55.6)	2.31 (58.7)	1.02 (25.9)	.380 (9.65)	.250 (6.35)	.420 (10.67)	.460 (11.68)	.250 (6.35)	.4375-20 UNF-2A	NA	NA	NA	.093 X .187 (2.36) X (4.75)
0036	1	1.88 (47.8)	2.00 (50.8)	.69 (17.5)	.211 (5.36)	.190 (4.83)	.230 (5.84)	.270 (6.86)	.190 (4.83)	.250-28 UNF-2A	NA	NA	NA	.062 (1.57)
0037	1	2.26 (57.4)	2.38 (60.5)	.77 (19.6)	.260 (6.60)	.320 (8.13)	.260 (6.60)	.300 (7.62)	.320 (8.13)	.3125-24 UNF-2A	NA	NA	NA	.062 X .125 (1.57) X (3.18)
0038	1	2.44 (62.0)	2.56 (65.8)	1.02 (25.9)	.380 (9.65)	.250 (6.35)	.420 (10.67)	.460 (11.68)	.250 (6.35)	.4375-20 UNF-2A	NA	NA	NA	.093 X .187 (2.36) X (4.75)
0039	1	2.32 (58.9)	2.44 (62.0)	.77 (19.6)	.260 (6.60)	.320 (8.13)	.260 (6.60)	.300 (7.62)	.320 (8.13)	.3125-24 UNF-2A	NA	NA	NA	.062 X .125 (1.57) X (3.18)
0040	1	2.32 (58.9)	2.44 (62.0)	1.15 (29.2)	.380 (9.65)	.250 (6.35)	.420 (10.67)	.460 (11.68)	.250 (6.35)	.4375-20 UNF-2A	NA	NA	NA	.093 X .187 (2.36) X (4.75)
0041	1	4.13 (104.9)	4.25 (108.0)	1.27 (32.3)	.380 (9.65)	.250 (6.35)	.420 (10.67)	.460 (11.68)	.250 (6.35)	.4375-20 UNF-2A	NA	NA	NA	.093 X .187 (2.36) X (4.75)

FIGURE 1. Case dimensions and circuit diagrams - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:31Z
Check the source to verify that this is the current version before use.

Dash number	Config-uration	Dimensions									Terminal thread	Terminal thread length		Terminal hole/Slot
		A		B	C	D	E		F	Mounting thread		G		H
		Min	Max	Max	Max	Max	Min	Max	Max			Min	Max	±.015 (0.38)
0042	1	2.19 (55.6)	2.31 (58.7)	1.15 (29.2)	.380 (9.65)	.250 (6.35)	.420 (10.67)	.460 (11.68)	.250 (6.35)	.4375-20 UNF-2A	NA	NA	NA	.093 X .187 (2.36) X (4.75)
0043	1	2.57 (65.3)	2.69 (68.3)	1.15 (29.2)	.380 (9.65)	.250 (6.35)	.420 (10.67)	.460 (11.68)	.250 (6.35)	.4375-20 UNF-2A	NA	NA	NA	.093 X .187 (2.36) X (4.75)
0044	2	3.82 (97.0)	3.94 (100.1)	1.52 (38.6)	.666 (16.92)	.690 (17.53)	.480 (12.19)	.520 (13.21)	.690 (17.53)	.750-20 UNEF-2A	.164-32 UNC-2A	.312 (7.92)	.375 (9.53)	NA
0045	1	2.50 (63.6)	2.62 (66.5)	1.27 (32.3)	.380 (9.65)	.250 (6.35)	.420 (10.67)	.460 (11.68)	.250 (6.35)	.4375-20 UNF-2A	NA	NA	NA	.093 X .187 (2.36) X (4.75)
0046	2	3.44 (87.4)	3.56 (90.4)	1.52 (38.6)	.666 (16.92)	.690 (17.53)	.480 (12.19)	.520 (13.21)	.690 (17.53)	.750-20 UNEF-2A	.164-32 UNC-2A	.312 (7.92)	.375 (9.53)	NA
0047	2	3.82 (97.0)	3.94 (100.1)	2.27 (57.7)	1.075 (27.31)	.690 (17.53)	.540 (13.72)	.580 (14.73)	.690 (17.53)	1.125-18 UNEF-2A	.164-32 UNC-2A	.312 (7.92)	.375 (9.53)	NA
0048	2	3.19 (81.0)	3.31 (84.1)	1.27 (32.3)	.540 (13.72)	.690 (17.53)	.480 (12.19)	.520 (13.21)	.690 (17.53)	.625-24 UNEF-2A	.164-32 UNC-2A	.312 (7.92)	.375 (9.53)	NA
0049	2	3.83 (97.3)	3.95 (100.3)	1.52 (38.6)	.666 (16.92)	.690 (17.53)	.480 (12.19)	.520 (13.21)	.690 (17.53)	.750-20 UNEF-2A	.164-32 UNC-2A	.312 (7.92)	.375 (9.53)	NA
0050	2	3.94 (100.1)	4.06 (103.1)	2.27 (57.7)	1.075 (27.31)	.810 (20.57)	.540 (13.72)	.580 (14.73)	.810 (20.57)	1.125-18 UNEF-2A	.190-32 UNF-2A	.312 (7.92)	.375 (9.53)	NA
0051	2	3.94 (100.1)	4.06 (103.1)	2.27 (57.7)	1.075 (27.31)	.810 (20.57)	.540 (13.72)	.580 (14.73)	.810 (20.57)	1.125-18 UNEF-2A	.190-32 UNF-2A	.312 (7.92)	.375 (9.53)	NA
0052	2	3.94 (100.1)	4.06 (103.1)	2.27 (57.7)	1.075 (27.31)	.880 (22.35)	.540 (13.72)	.580 (14.73)	.880 (22.35)	1.125-18 UNEF-2A	.250-20 UNC-2A	.44 (11.2)	.50 (12.7)	NA
0053	2	4.44 (112.8)	4.57 (116.1)	2.27 (57.7)	1.075 (27.31)	.880 (22.35)	.540 (13.72)	.580 (14.73)	.880 (22.35)	1.125-18 UNEF-2A	.250-20 UNC-2A	.44 (11.2)	.50 (12.7)	NA
0054	1	1.88 (47.8)	2.00 (50.8)	.69 (17.5)	.211 (5.36)	.190 (4.83)	.230 (5.84)	.270 (6.86)	.190 (4.83)	.250-28 UNF-2A	NA	NA	NA	.062 (1.57)
0055	1	2.19 (55.6)	2.31 (58.7)	1.02 (25.9)	.380 (9.65)	.250 (6.35)	.420 (10.67)	.460 (11.68)	.250 (6.35)	.4375-20 UNF-2A	NA	NA	NA	.093 X .187 (2.36) X (4.75)
0056	1	1.88 (47.8)	2.00 (50.8)	.69 (17.5)	.211 (5.36)	.190 (4.83)	.230 (5.84)	.270 (6.86)	.190 (4.83)	.250-28 UNF-2A	NA	NA	NA	.062 (1.57)
0057	1	2.81 (71.4)	2.93 (74.4)	1.02 (25.9)	.380 (9.65)	.250 (6.35)	.420 (10.67)	4.60 (11.68)	.250 (6.35)	.4375-20 UNF-2A	NA	NA	NA	.093 X .187 (2.36) X (4.75)
0058	1	2.32 (58.9)	2.44 (62.0)	.77 (19.6)	.260 (6.50)	.320 (8.13)	.260 (6.60)	.300 (7.62)	.320 (8.13)	.3125-24 UNF-2A	NA	NA	NA	.062 X .125 (1.57) X (3.18)
0059	1	4.13 (104.9)	4.25 (108.0)	1.27 (32.3)	.380 (9.65)	.250 (6.35)	.420 (10.67)	.460 (11.68)	.250 (6.35)	.4375-20 UNF-2A	NA	NA	NA	.093 X .187 (2.36) X (4.75)
0060	1	2.19 (55.6)	2.31 (58.7)	1.15 (29.2)	.380 (9.65)	.250 (6.35)	.420 (10.67)	.460 (11.68)	.250 (6.35)	.4375-20 UNF-2A	NA	NA	NA	.093 X .187 (2.36) X (4.75)
0061	2	3.82 (97.0)	3.94 (100.1)	1.52 (38.6)	.666 (16.92)	.690 (17.53)	.480 (12.19)	.520 (13.21)	.690 (17.53)	.750-20 UNEF-2A	.164-32 UNC-2A	.312 (7.92)	.375 (9.53)	NA

FIGURE 1. Case dimensions and circuit diagrams - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:31Z
Check the source to verify that this is the current version before use.

Dash number	Config-uration	Dimensions									Terminal thread	Terminal thread length		Terminal hole/Slot
		A		B	C	D	E		F	Mounting thread		G		H
		Min	Max	Max	Max	Max	Min	Max	Max			Min	Max	±.015 (0.38)
0062	1	2.69 (68.3)	2.81 (71.4)	1.27 (32.3)	.380 (9.65)	.250 (6.35)	.420 (10.67)	.460 (11.68)	.250 (6.35)	.4375-20 UNF-2A	NA	NA	NA	.093 X .187 (2.36) X (4.75)
0063	2	3.82 (97.0)	3.94 (100.1)	1.77 (45.0)	.666 (16.92)	.690 (17.53)	.480 (12.19)	.520 (13.21)	.690 (17.53)	.750-20 UNEF-2A	.164-32 UNC-2A	.312 (7.92)	.375 (9.53)	NA
0064	2	3.19 (81.0)	3.31 (84.1)	1.27 (32.3)	.540 (13.72)	.690 (17.53)	.480 (12.19)	.520 (13.21)	.690 (17.53)	.625-24 UNEF-2A	.164-32 UNC-2A	.312 (7.92)	.375 (9.53)	NA
0065	2	3.94 (100.1)	4.06 (103.1)	1.52 (38.6)	.666 (16.92)	.690 (17.53)	.480 (12.19)	.520 (13.21)	.690 (17.53)	.750-20 UNEF-2A	.164-32 UNC-2A	.312 (7.92)	.375 (9.53)	NA
0066	2	4.44 (112.8)	4.56 (115.8)	2.27 (57.7)	1.075 (27.3)	.810 (20.57)	.540 (13.72)	.580 (14.73)	.810 (20.57)	1.125-18 UNEF-2A	.190-32 UNF-2A	.312 (7.92)	.375 (9.53)	NA
0067	2	4.69 (119.1)	4.81 (122.2)	2.27 (57.7)	1.075 (27.3)	.810 (20.57)	.540 (13.72)	.580 (14.73)	.810 (20.57)	1.125-18 UNEF-2A	.190-32 UNF-2A	.312 (7.92)	.375 (9.53)	NA
0068	2	4.44 (112.8)	4.56 (115.8)	2.27 (57.7)	1.075 (27.3)	.880 (22.35)	.540 (13.72)	.580 (14.73)	.880 (22.35)	1.125-18 UNEF-2A	.250-20 UNC-2A	.44 (11.2)	.50 (12.7)	NA
0069	2	5.44 (138.2)	5.56 (141.2)	2.27 (57.7)	1.075 (27.3)	.880 (22.35)	.540 (13.72)	.580 (14.73)	.880 (22.35)	1.125-18 UNEF-2A	.250-20 UNC-2A	.44 (11.2)	.50 (12.7)	NA

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Circuit diagram is for information only.
4. Mounting hardware shall be supplied with filter.
5. Terminal identification (non-symmetrical filters): The case shall be marked at the threaded end of the filter, with the symbol “C” or the symbol “L” as follows:

Circuit	Symbol
L_1	C
L_2	L
$2L_1$	C
$2L_2$	L

6. Angle or bend of terminals for configuration 1 is optional.

FIGURE 1. Case dimensions and circuit diagrams - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:31Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Circuit diagrams and dimensions: See figure 1 and table I.

Case: Metal.

Case and mounting hardware finish: In accordance with MIL-PRF-15733. Pure tin finish is prohibited.

Rated voltage: 100 volts dc, 30 volts ac, from dc to 400 Hz.

Rated current: See table I.

Insertion loss: In accordance with MIL-PRF-15733 and the following:

At +25°C the insertion loss shall be as specified in table I.
At -55°C and +125°C the insertion loss shall be as specified in table I except up to 10 MHz, a degradation of 2dB from the value specified in table I shall be allowed.

Operating temperature range: -55°C to +125°C.

Seal: In accordance with MIL-PRF-15733.

Temperature rise: In accordance with MIL-PRF-15733 and the following:

25°C maximum for parts rated up to and including 10 amperes.
35°C maximum for parts rated above 10 amperes.

Maximum voltage drop: 1.0 volts ac (rms) and dc.

Insulation resistance: In accordance with MIL-PRF-15733. Insulation resistance shall be not less than 1,000 megohms minimum at 25°C, and shall be not less than 100 megohms minimum at 125°C.

Terminal strength: In accordance with MIL-PRF-15733 and method 211 of MIL-STD-202 and the following:

Configuration 1: Test condition A, applied force shall be 5 pounds.
Configuration 2: Test condition E, torque shall be as specified in MIL-PRF-15733.

Salt atmosphere (corrosion): In accordance with MIL-PRF-15733 and method 101, MIL-STD-202; test condition A.

Shock (specified pulse): In accordance with MIL-PRF-15733 and method 213, MIL-STD-202; test condition I.

Vibration (high frequency): In accordance with MIL-PRF-15733 and method 204, MIL-STD-202; test condition B.

Moisture resistance: In accordance with MIL-PRF-15733 except that after the 24 hour drying period, insulation resistance shall meet initial requirements.

Life: In accordance with MIL-PRF-15733 and method 108, MIL-STD-202; test condition B

Solderability: In accordance with MIL-PRF-15733. Not applicable to configuration 2.

Part or Identifying Number (PIN): M15733/72- (dash number from table I).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:31Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics.

Dash number	Circuit diagram	Rated current (amps) ac (rms) or dc	Minimum insertion loss (dB) in accordance with MIL-STD-220 1/ At +25°C									
			14 kHz	20 kHz	50 kHz	150 kHz	300 kHz	600 kHz	1 MHz	10 MHz	100 MHz	1 GHz
0001	L_1	.5	---	---	---	30	40	50	60	60	60	60
0002	L_2	.5	---	---	---	30	40	50	60	60	60	60
0003	L_1	.5	---	---	---	50	60	60	60	60	60	60
0004	L_2	.5	---	---	---	50	60	60	60	60	60	60
0005	L_1	1.0	---	---	---	30	40	50	60	60	60	60
0006	L_2	1.0	---	---	---	30	40	50	60	60	60	60
0007	L_1	1.0	---	---	---	50	60	60	60	60	60	60
0008	L_2	1.0	---	---	---	50	60	60	60	60	60	60
0009	L_1	3.0	---	---	---	30	40	50	60	60	60	60
0010	L_2	3.0	---	---	---	30	40	50	60	60	60	60
0011	L_1	3.0.	---	---	---	40	50	60	60	60	60	60
0012	L_2	3.0	---	---	---	40	50	60	60	60	60	60
0013	L_1	5.0	---	---	---	30	40	50	60	60	60	60
0014	L_2	5.0	---	---	---	30	40	50	60	60	60	60
0015	L_1	5.0	---	---	---	40	50	60	60	60	60	60
0016	L_2	5.0	---	---	---	40	50	60	60	60	60	60
0017	$2L_1$	.5	---	10	40	75	80	80	80	80	80	80
0018	$2L_2$	.5	---	10	40	75	80	80	80	80	80	80
0019	$2L_1$	1.0	---	10	40	75	80	80	80	80	80	80
0020	$2L_2$	1.0	---	10	40	75	80	80	80	80	80	80
0021	$2L_1$	3.0	---	---	30	65	80	80	80	80	80	80
0022	$2L_2$	3.0	---	---	30	65	80	80	80	80	80	80
0023	$2L_1$	5.0	---	---	30	65	80	80	80	80	80	80
0024	$2L_2$	5.0	---	---	30	65	80	80	80	80	80	80
0025	$2L_1$	10.0	---	---	30	65	80	80	80	80	80	80
0026	$2L_2$	10.0	---	---	30	65	80	80	80	80	80	80
0027	$2L_1$	20.0	---	---	10	55	80	80	80	80	80	80
0028	$2L_2$	20.0	---	---	10	55	80	80	80	80	80	80
0029	$2L_1$	30.0	---	---	10	55	80	80	80	80	80	80
0030	$2L_2$	30.0	---	---	10	55	80	80	80	80	80	80
0031	$2L_1$	50.0	---	---	10	55	80	80	80	80	80	80
0032	$2L_2$	50.0	---	---	10	55	80	80	80	80	80	80
0033	Pi	.5	---	---	---	40	60	75	80	80	80	80
0034	Pi	.5	---	---	---	60	80	80	80	80	80	80
0035	Pi	.5	---	---	---	80	80	80	80	80	80	80
0036	Pi	1.0	---	---	---	40	60	75	80	80	80	80

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:31Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics - Continued.

Dash number	Circuit diagram	Rated current (amps) ac (rms) or dc	Minimum insertion loss (dB) in accordance with MIL-STD-220 1/ At +25°C									
			14 kHz	20 kHz	50 kHz	150 kHz	300 kHz	600 kHz	1 MHz	10 MHz	100 MHz	1 GHz
0037	Pi	1.0	---	---	---	60	80	80	80	80	80	80
0038	Pi	1.0	---	---	---	80	80	80	80	80	80	80
0039	Pi	3.0	---	---	---	40	60	75	80	80	80	80
0040	Pi	3.0	---	---	---	60	80	80	80	80	80	80
0041	Pi	3.0	---	---	---	80	80	80	80	80	80	80
0042	Pi	5.0	---	---	---	40	60	75	80	80	80	80
0043	Pi	5.0	---	---	---	60	80	80	80	80	80	80
0044	Pi	5.0	---	---	---	80	80	80	80	80	80	80
0045	Pi	10.0	---	---	---	40	60	75	80	80	80	80
0046	Pi	10.0	---	---	---	60	80	80	80	80	80	80
0047	Pi	10.0	---	---	---	80	80	80	80	80	80	80
0048	Pi	20.0	---	---	---	40	60	75	80	80	80	80
0049	Pi	20.0	---	---	---	60	80	80	80	80	80	80
0050	Pi	30.0	---	---	---	40	60	75	80	80	80	80
0051	Pi	30.0	---	---	---	60	80	80	80	80	80	80
0052	Pi	50.0	---	---	---	40	60	75	80	80	80	80
0053	Pi	50.0	---	---	---	60	80	80	80	80	80	80
0054	T	.5	---	---	---	45	60	70	70	70	70	70
0055	T	.5	20	28	50	60	60	60	60	70	70	70
0056	T	1.0	---	---	---	35	50	60	70	70	70	70
0057	T	1.0	20	28	50	60	60	60	60	70	70	70
0058	T	3.0	---	---	---	25	35	45	60	70	70	70
0059	T	3.0	20	26	45	60	60	60	60	70	70	70
0060	T	5.0	---	---	---	25	35	45	60	70	70	70
0061	T	5.0	20	26	45	60	60	60	60	70	70	70
0062	T	10.0	---	---	---	25	35	45	50	70	70	70
0063	T	10.0	15	18	28	37	45	53	58	70	70	70
0064	T	20.0	---	---	---	25	35	45	50	70	70	70
0065	T	20.0	15	18	28	37	45	53	58	70	70	70
0066	T	30.0	---	---	---	25	35	45	50	70	70	70
0067	T	30.0	15	18	28	37	45	53	58	70	70	70
0068	T	50.0	---	---	---	25	35	45	50	70	70	70
0069	T	50.0	15	18	28	37	43	50	58	70	70	70

1/ Full-load insertion loss measurements shall be performed over the frequency range of 100 kHz to 20 MHz inclusive. Measurements below or above this frequency range shall be performed at no-load.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:31Z
Check the source to verify that this is the current version before use.

Periodic inspection: Group C inspection shall be in accordance with MIL-PRF-15733 except as follows:

Inspection schedule for each subgroup shall be every 12 months.

MIL-PRF-15733/72, MIL-PRF-15733/73, and MIL-PRF-15733/74 styles may be combined for group C inspection provided that all styles are represented in the sample in the approximate ratio of production.

Recommended mounting torque:

Mounting thread	Recommended torque
.250 - 28	20 to 25 in-lb
.3125 -24	25 to 30 in-lb
.4375 - 20	60 to 70 in-lb
.625 - 24	100 to 115 in-lb
.750 - 20	120 to 140 in-lb
1.125 - 18	150 to 175 in-lb

NOTES:

* Reference documents. In addition to MIL-PRF-15733, this specification sheet references the following documents.

MIL-STD-202
MIL-STD-220

* (Copies of these documents are available online at http://assist.daps.dla.mil/quicksearch or http://assist.daps.dla.mil or from the Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111-5094).

* CHANGES FROM PREVIOUS ISSUE The margins of this specification are marked with asterisks to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodian:
Army - CR
Navy - EC
Air Force – 11
DLA - CC

Preparing activity:
DLA - CC

(Project 5915-2008-003)

Review activities:
Army - AR, AT, AV
Navy - AS, MC, OS, SH
Air Force - 19, 99

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using ASSIST Online database at http://assist.daps.dla.mil .

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:31Z
Check the source to verify that this is the current version before use.