NOTE. The document identifier and heading have been changed on this page to reflect that this is a performance specification. There are no other changes to this document. The document identifier on subsequent pages has not been changed, but will be changed the next time this document is revised

PERFORMANCE SPECIFICATION SHEET

FILTERS, RADIO FREQUENCY INTERFERENCE,

HERMETICALLY SEALED, STYLE FL55

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the filters described herein shall consist of this specification and the latest issue of MIL-F-15733.

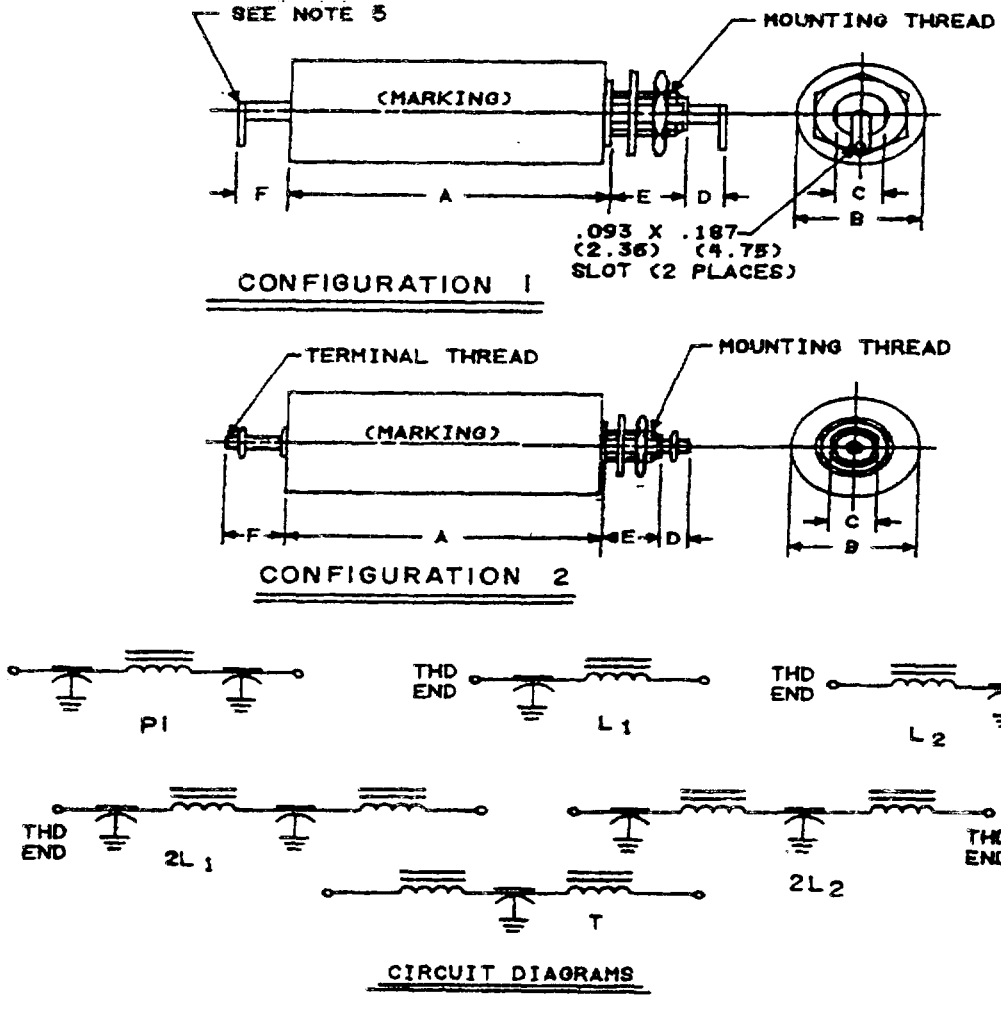


FIGURE 1. Case dimensions and circuit diagrams

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:31Z
Check the source to verify that this is the current version before use.

Dash No.	Configuration	Dimensions									
		A		B	C	D	E		F	Mounting thread	Terminal thread
		Min	Max	Max	Max	Max	Min	Max	Max		
0001	1	1.63 (41.4)	1.75 (44.5)	.69 (17.5)	.211 (5.36)	.190 (4.83)	.230 (5.84)	.270 (6.86)	.190 (4.83)	.250-28 UNF-2A	NA
0002	1	1.63 (41.4)	1.75 (44.5)	.69 (17.5)	.211 (5.36)	.190 (4.83)	.230 (5.84)	.270 (6.86)	.190 (4.83)	.250-28 UNF-2A	NA
0003	1	1.94 (49.3)	2.06 (52.3)	1.02 (25.9)	.380 (9.65)	.250 (6.35)	.420 (10.67)	.460 (11.68)	.250 (6.35)	.4375-20 UNF-2A	NA
0004	1	1.94 (49.3)	2.06 (52.3)	1.02 (25.9)	.380 (9.65)	.250 (6.35)	.420 (10.67)	.460 (11.68)	.250 (6.35)	.4375-20 UNF-2A	NA
0005	1	1.88 (47.8)	2.00 (50.8)	.69 (17.5)	.211 (5.36)	.190 (4.83)	.230 (5.84)	.270 (6.86)	.190 (4.83)	.250-28 UNF-2A	NA
0006	1	1.88 (47.8)	2.00 (50.8)	.69 (17.5)	.211 (5.36)	.190 (4.83)	.230 (5.84)	.270 (6.86)	.190 (4.83)	.250-28 UNF-2A	NA
0007	1	2.07 (52.6	2.19 (55.6)	1.15 (29.2)	.380 (9.65)	.250 (6.35)	.420 (10.67)	.460 (11.68)	.250 (6.35)	.4375-20 UNF-2A	NA
0008	1	2.07 (52.6)	2.19 (55.6)	1.15 (29.2)	.380 (9.65)	.250 (6.35)	.420 (10.67)	.460 (11.68)	.250 (6.35)	.4375-20 UNF-2A	NA
0009	1	2.13 (54.1)	2.25 (57.2)	1.02 (25.9)	.380 (9.65)	.250 (6.35)	.420 (10.67)	.460 (11.68)	.250 (6.35)	.4375-20 UNF-2A	NA
0010	1	2.13 (54.1)	2.25 (57.2)	1.02 (25.9)	.380 (9.65)	.250 (6.35)	.420 (10.67)	.460 (11.68)	.250 (6.35)	.4375-20 UNF-2A	NA
0011	2	2.25 (57.2)	2.37 (60.2)	1.52 (38.6)	.666 (16.92)	.690 (17.53)	.480 (12.19)	.520 (13.21)	.690 (17.53)	.750-20 UNEF-2A	.164-32 UNC-2A
0012	2	2.25 (57.2)	2.37 (60.2)	1.52 (38.6)	.666 (16.92)	.690 (17.53)	.480 (12.19)	.520 (13.21)	.690 (17.53)	.750-20 UNEF-2A	.164-32 UNC-2A
0013	1	2.63 (66.8)	2.75 (69.9)	1.15 (29.2)	.380 (9.65)	.250 (6.35)	.420 (10.67)	.460 (11.68)	.250 (6.35)	.4375-20 UNF-2A	NA
0014	1	2.63 (66.8)	2.75 (69.9)	1.15 (29.2)	.380 (9.65)	.250 (6.35)	.420 (10.67)	.460 (11.68)	.250 (6.35)	.4375-20 UNF-2A	NA
0015	2	3.07 (78.0)	3.19 (81.0)	1.52 (38.6)	.666 (16.92)	.690 (17.53)	.480 (12.19)	.520 (13.21)	.690 (17.53)	.750-20 UNEF-2A	.164-32 UNC-2A
0016	2	3.07 (78.0)	3.19 (81.0)	1.52 (38.6)	.666 (16.92)	.690 (17.53)	.480 (12.19)	.520 (13.21)	.690 (17.53)	.750-20 UNEF-2A	.164-32 UNC-2A
0017	1	3.06 (77.7)	3.18 (80.8)	.77 (19.6)	.260 (6.60)	.320 (8.13)	.260 (6.60)	.300 (7.62)	.320 (8.13)	.3125-24 UNF-2A	NA
0018	1	3.06 (77.7)	3.18 (80.8)	.77 (19.6)	.260 (6.60)	.320 (8.13)	.260 (6.60)	.300 (7.62)	.320 (8.13)	.3125-24 UNF-2A	NA
0019	1	3.19 (81.0)	3.31 (84.1)	1.02 (25.9)	.380 (9.65)	.250 (6.35)	.420 (10.67)	.460 (11.68)	.250 (6.35)	.4375-20 UNF-2A	NA
0020	1	3.19 (81.0)	3.31 (84.1)	1.02 (25.9)	.380 (9.65)	.250 (6.35)	.420 (10.67)	.460 (11.68)	.250 (6.35)	.4375-20 UNF-2A	NA

FIGURE 1. Case dimensions and circuit diagrams - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:31Z
Check the source to verify that this is the current version before use.

Dash No.	Configuration	Dimensions									
		A		B	C	D	E		F	Mounting thread	Terminal thread
		Min	Max	Max	Max	Max	Min	Max	Max		
0021	1	3.44 (87.4)	3.56 (90.4)	1.15 (29.2)	.380 (9.65)	.250 (6.35)	.420 (10.67)	.460 (11.68)	.250 (6.35)	.4375-20 UNF-2A	NA
0022	1	3.44 (87.4)	3.56 (90.4)	1.15 (29.2)	.380 (9.65)	.250 (6.35)	.420 (10.67)	.460 (11.68)	.250 (6.35)	.4375-20 UNF-2A	NA
0023	1	4.44 (112.8)	4.56 (115.8)	1.27 (32.3)	.380 (9.65)	.250 (6.35)	.420 (10.67)	.460 (11.68)	.250 (6.35)	.4375-20 UNF-2A	NA
0024	1	4.44 (112.8)	4.56 (115.8)	1.27 (32.3)	.380 (9.65)	.250 (6.35)	.420 (10.67)	.460 (11.68)	.250 (6.35)	.4375-20 UNF-2A	NA
0025	2	4.44 (112.8)	4.56 (115.8)	1.52 (38.6)	.666 (16.92)	.690 (17.53)	.480 (12.19)	.520 (13.21)	.690 (17.53)	.750-20 UNEF-2A	.164-52 UNC-2A
0026	2	4.44 (112.8)	4.56 (115.8)	1.52 (38.6)	.666 (16.92)	.690 (17.53)	.480 (12.19)	.520 (13.21)	.690 (17.53)	.750-20 UNEF-2A	.164-32 UNC-2A
0027	2	5.44 (138.2)	5.56 (141.2)	1.77 (45.0)	.666 (16.92)	.690 (17.53)	.480 (12.19)	.520 (13.21)	.690 (17.53)	.750-20 UNEF-2A	.164-32 UNC-2A
0028	2	5.44 (138.2)	5.56 (141.2)	1.77 (45.0)	.666 (16.92)	.690 (17.53)	.480 (12.19)	.520 (13.21)	.690 (17.53)	.750-20 UNEF-2A	.164-32 UNC-2A
0029	2	5.56 (141.2)	5.68 (144.3)	2.27 (57.7)	1.075 (27.31)	.810 (20.57)	.540 (13.72)	.580 (14.73)	.810 (20.57)	1.125-18 UNEF-2A	.190-32 UNF-2A
0030	2	5.56 (141.2)	5.68 (144.3)	2.27 (57.7)	1.075 (27.31)	.810 (20.57)	.540 (13.72)	.580 (14.73)	.810 (20.57)	1.125-18 UNEF-2A	.190-32 UNF-2A
0031	2	6.44 (163.6)	6.56 (166.6)	2.27 (57.7)	1.075 (27.31)	.880 (22.35)	.540 (13.72)	.580 (14.73)	.880 (22.35)	1.125-18 UNEF-2A	.250-20 UNC-2A
0032	2	6.44 (163.6)	6.56 (166.6)	2.27 (57.7)	1.075 (27.31)	.880 (22.35)	.540 (13.72)	.580 (14.73)	.880 (22.35)	1.125-18 UNEF-2A	.250-20 UNC-2A
0033	1	2.26 (57.4)	2.38 (60.5)	.69 (17.5)	.211 (5.36)	.190 (4.83)	.230 (5.84)	.270 (6.86)	.190 (4.83)	.250-28 UNF-2A	NA
0034	1	2.69 (68.3)	2.81 (71.4)	.77 (19.6)	.260 (6.60)	.320 (8.13)	.260 (6.60)	.300 (7.62)	.320 (8.13)	.3125-24 UNF-2A	NA
0035	1	2.94 (74.7)	3.06 (77.7)	1.02 (25.9)	.380 (9.65)	.250 (6.35)	.420 (10.67)	.460 (11.68)	.250 (6.35)	.4375-20 UNF-2A	NA
0036	1	2.26 (57.4)	2.38 (60.5)	.69 (17.5)	.211 (5.36)	.190 (4.83)	.230 (5.84)	.270 (6.86)	.190 (4.83)	.250-28 UNF-2A	NA
0037	1	2.32 (58.9)	2.44 (62.0)	1.02 (25.9)	.380 (9.65)	.250 (6.35)	.420 (10.67)	.460 (11.68)	.250 (6.35)	.4375-20 UNF-2A	NA
0038	1	3.26 (82.8)	3.38 (85.9)	1.15 (29.2)	.380 (9.65)	.250 (6.35)	.420 (10.67)	.460 (11.68)	.250 (6.35)	.4375-20 UNF-2A	NA
0039	1	2.50 (63.5)	2.62 (66.6)	1.02 (25.9)	.380 (9.65)	.250 (6.35)	.420 (10.67)	.460 (11.68)	.250 (6.35)	.4375-20 UNF-2A	NA
0040	1	2.94 (74.7)	3.06 (77.7)	1.15 (29.2)	.380 (9.65)	.250 (6.35)	.420 (10.67)	.460 (11.68)	.250 (6.35)	.4375-20 UNF-2A	NA

FIGURE 1. Case dimensions and circuit diagrams - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:31Z
Check the source to verify that this is the current version before use.

Dash No.	Configuration	Dimensions A Min	A Max	B Max	C Max	D Max	E Min	E Max	F Max	Mounting thread	Terminal thread
0041	2	3.69 (93.7)	3.81 (96.7)	1.52 (38.6)	.666 (16.92)	.690 (17.53)	.480 (12.19)	.520 (13.21)	.690 (17.53)	.750-20 UNEF-2A	.164-32 UNC-2A
0042	1	2.82 (71.6)	2.94 (74.7)	1.15 (29.2)	.380 (9.65)	.250 (6.35)	.420 (10.67)	.460 (11.68)	.250 (6.35)	.4375-20 UNF-2A	NA
0043	1	4.07 (103.4)	4.19 (106.4)	1.27 (32.3)	.380 (9.65)	.250 (6.35)	.420 (10.67)	.460 (11.68)	.250 (6.35)	.4375-20 UNF-2A	NA
0044	2	4.32 (109.7)	4.44 (112.8)	1.52 (38.6)	.666 (16.92)	.690 (17.53)	.480 (12.19)	.520 (13.21)	.690 (17.53)	.750-20 UNEF-2A	.164-32 UNC-2A
0045	1	3.19 (81.0)	3.31 (84.1)	1.27 (32.3)	.380 (9.65)	.250 (6.35)	.420 (10.67)	.460 (11.68)	.250 (6.35)	.4375-20 UNF-2A	NA
0046	2	4.14 (105.2)	4.26 (108.2)	1.52 (38.6)	.666 (16.92)	.690 (17.53)	.480 (12.19)	.520 (13.21)	.690 (17.53)	.750-20 UNEF-2A	.164-32 UNC-2A
0047	2	5.19 (131.8)	5.31 (134.9)	2.27 (57.7)	1.075 (27.31)	.690 (17.53)	.540 (13.72)	.580 (14.73)	.690 (17.53)	1.125-18 UNEF-2A	.164-32 UNC-2A
0048	2	3.57 (90.7)	3.69 (93.7)	1.52 (38.6)	.666 (16.92)	.690 (17.53)	.480 (12.19)	.520 (13.21)	.690 (17.53)	.750-20 UNEF-2A	.164-32 UNC-2A
0049	2	4.94 (125.5)	5.06 (128.5)	1.77 (45.0)	.666 (16.92)	.690 (17.53)	.480 (12.19)	.520 (13.21)	.690 (17.53)	.750-20 UNEF-2A	.164-32 UNC-2A
0050	2	3.94 (100.1)	4.06 (103.1)	2.27 (57.7)	1.075 (27.31)	.810 (20.57)	.540 (13.72)	.580 (14.73)	.810 (20.57)	1.125-18 UNEF-2A	.190-32 UNF-2A
0051	2	4.83 (122.7)	4.95 (125.7)	2.27 (57.7)	1.075 (27.31)	.810 (20.57)	.540 (13.72)	.580 (14.73)	.810 (20.57)	1.125-18 UNEF-2A	.190-30 UNF-2A
0052	2	3.94 (100.1)	4.06 (103.1)	2.27 (57.7)	1.075 (27.31)	.880 (22.35)	.540 (13.72)	.580 (14.73)	.880 (22.35)	1.125-18 UNEF-2A	.250-20 UNC-2A
0053	2	5.69 (144.5)	5.81 (147.6)	2.27 (57.7)	1.075 (27.31)	.880 (22.35	.540 (13.72)	.580 (14.73)	.880 (22.35)	1.125-18 UNEF-2A	.250-20 UNC-2A
0054	1	2.26 (57.4)	2.38 (60.5)	.69 (17.5)	.211 (5.36)	.190 (4.83)	.230 (5.84)	.270 (6.86)	.190 (4.83)	.250-28 UNF-2A	NA
0055	1	2.94 (74.7)	3.06 (77.7)	1.02 (25.9)	.380 (9.65)	.250 (6.35)	.420 (10.67)	.460 (11.68)	.250 (6.35)	.4375-20 UNF-2A	NA
0056	1	2.26 (57.4)	2.38 (60.5)	.69 (17.5)	.211 (5.36)	.190 (4.83)	.230 (5.84)	.270 (6.86)	.190 (4.83)	.250-25 UNF-2A	NA
0057	1	3.81 (96.8)	3.93 (99.8)	1.15 (29.2)	.380 (9.65)	.250 (6.35)	.420 (10.67)	.460 (11.68)	.250 (6.35)	.4375-20 UNF-2A	NA
0058	1	2.50 (63.5)	2.62 (66.6)	1.02 (25.9)	.380 (9.65)	.250 (6.35)	.420 (10.67)	.460 (11.68)	.250 (6.35)	.4375-20 UNF-2A	NA
0059	2	3.69 (93.7)	3.81 (96.7)	1.52 (38.6)	.666 (16.92)	.690 (17.53)	.480 (12.19)	.520 (13.21)	.690 (17.53)	.750-20 UNEF-2A	.164-32 UNC-2A
0060	1	2.82 (71.6)	2.94 (74.7)	1.15 (29.2)	.380 (9.65)	.250 (6.35)	.420 (10.67)	.460 (11.68)	.250 (6.35)	.4375-20 UNF-2A	NA

FIGURE 1. Case dimensions and circuit diagrams - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:31Z
Check the source to verify that this is the current version before use.

Dash No.	Configuration	Dimensions									
		A		B	C	D	E		F	Mounting thread	Terminal thread
		Min	Max	Max	Max	Max	Min	Max	Max		
0061	2	4.32 (109.7)	4.44 (112.8)	1.52 (38.6)	.666 (16.92)	.690 (17.53)	.480 (12.19)	.520 13.21)	.690 (17.53)	.750-20 UNEF-2A	.164-32 UNC-2A
0062	1	3.19 (81.0)	3.31 (84.1)	1.27 (32.3)	.380 (9.65)	.250 (6.35)	.420 (10.67)	.460 (11.68)	.250 (6.35)	.4375-20 UNF-2A	NA
0063	2	4.94 (125.5)	5.06 (128.5)	1.77 (45.0)	.666 (16.92)	.690 (17.53)	.480 (12.19)	.520 (13.21)	.690 (17.53)	.750-20 UNEF-2A	.164-32 UNC-2A
0064	2	3.57 (90.7)	3.69 (93.7)	1.52 (38.6)	.666 (16.92)	.690 (17.53)	.480 (12.19)	.520 (13.21)	.690 (17.53)	.750-20 UNEF-2A	.164-32 UNC-2A
0065	2	4.94 (125.5)	5.06 (128.5)	1.77 (45.0)	.666 (16.92)	.690 (17.53)	.480 (12.19)	.520 (13.21)	.690 (17.53)	.750-20 UNEF-2A	.164-32 UNC-2A
0066	2	4.44 (112.8)	4.56 (115.8)	2.27 (57.7)	1.075 (27.31)	.810 (20.57)	.540 (13.72)	.580 (14.73)	.810 (20.57)	1.125-18 UNEF-2A	.190-32 UNF-2A
0067	2	5.44 (138.2)	5.56 (141.2)	2.27 (57.7)	1.075 (27.31)	.810 (20.57)	.540 (13.72)	.580 (14.73)	.810 (20.57)	1.125-18 UNEF-2A	.190-32 UNF-2A
0068	2	4.69 (119.1)	4.81 (122.2)	2.27 (57.7)	1.075 (27.31)	.880 (22.35)	.540 (13.72)	.580 (14.73)	.880 (22.35)	1.125-18 UNEF-2A	.250-20 UNC-2A
0069	2	6.44 (163.6)	6.56 (166.6)	2.27 (57.7)	1.075 (27.31)	.880 (22.35)	.540 (13.72)	.580 (14.73)	.880 (22.35)	1.125-18 UNEF-2A	.250-20 UNC-2A

NOTES:
1. Dimensions are in inches, metric equivalents are in parentheses and are given for general information only.
2. Circuit diagram is for information only.
3. Mounting hardware shall be supplied with filter.
4. Terminal identification (non-symmetrical filters): The case shall be marked at the threaded end of the filter, with the symbol "C" or the symbol "L" as follows:

Circuit	Symbol
L_1	C
L_2	L
$2L_1$	C
$2L_2$	L

5. Angle or bend of terminals for configuration 1 is optional.
6. Solderability is not applicable to configuration 2.

FIGURE 1. Case dimensions and circuit diagrams - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:31Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Circuit diagrams and dimensions: See figure 1 and table I.

Case: Metal.

Rated voltage: 400 volts dc, 115 volts ac from dc to 400 Hz.

Rated current: See table I.

Insertion loss: At +25°C shall be as specified in table I.
At -55°C and +125°C the insertion loss shall be as specified in table I except as follows:

Up to 10 MHz: A degradation of 2 dB from the +25°C value specified in table I shall be allowed.

Operating temperature range: -55° to +125°C.

Seal: Method 112, test condition A, MIL-STD-202.

Temperature rise: 25°C for parts rated up to and including 10 amperes.

35°C for parts rated above 10 amperes.

Dielectric withstanding voltage: Method 301 of MIL-STD-202, 2.5 times the rated dc voltage applied between either terminal and the case for 5 seconds, minimum.

Maximum charging current: 50 milliamperes.

Barometric pressure: Method 105, test condition B, MIL-STD-202.

Maximum voltage drop: 1.15 volts ac (rms) and dc.

Insulation resistance: Method 302, test condition A, MIL-STD-202. Insulation resistance shall be not less than 1,000 megohms minimum at 25°C, and shall be not less than 100 megohms minimum at 125°C.

Overload: In accordance with MIL-F-15733.

Terminal strength: Method 211 of MIL-STD-202.

Configuration 1: Test condition A, applied force: 5 pounds.

Configuration 2: Test condition E, torque shall be as specified in MIL-F-15733.

Resistance to soldering heat: Method 210, test condition B, MIL-STD-202 (solder lug terminals only).

Salt spray (corrosion): Method 101, test condition A, MIL-STD-202.

Thermal shock and immersion:

Thermal shock:

Method 107, test condition A, MIL-STD-202, except the temperature at step 3 shall be +125°C.

Immersion: Method 104, test condition A, MIL-STD-202.

Measurements after final cycle:

Dielectric withstanding voltage: 90 percent of the initial voltage applied for 5 ±1 seconds.

Maximum charging current: 50 milliamperes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:31Z
Check the source to verify that this is the current version before use.

Insulation resistance: Shall be not less than 30 percent of the initial value.

Insertion loss (check test): Shall meet initial requirements.

Shock (specified pulse): Method 213, test condition I, MIL-STD-202.

Electrical load: 100 percent of the rated voltage shall be applied between terminals and case.

Vibration (high frequency): Method 204, test condition B, MIL-STD-202.

Electrical load: Rated voltage and rated current shall be applied continuously during test.

Test during vibration: During the last cycle in each direction, an electrical measurement shall be made to determine intermittent open or short-circuiting. After vibration test, filters shall meet the initial requirements of insertion loss (check test).

Moisture resistance: Method 107, test condition A, MIL-STD-202, except that the temperature of step 3 shall be +125°C. No measurements shall be made before and after cycling. Filters shall then be tested in accordance with method 106, MIL-STD-202.

Initial measurements: Not applicable.

Polarization voltage: 100 volts dc.

Measurements after 24-hour drying period.

Dielectric withstanding voltage: 90 percent of the initial voltage shall be applied for 5 ±1 seconds.

Maximum charging current: 50 milliamperes.

Insulation resistance: Shall meet the initial requirements.

Insertion loss (check test): Shall meet the initial requirements.

Life: Method 108, test condition B, MIL-STD-202.

Test voltage: 1.4 times rated dc voltage at +125°C.

Measurements after test:

Dielectric withstanding voltge: 90 percent of the initial voltage applied for 5 ±1 seconds.

Insulation resistance: Shall be not less than 30 percent of the initial requirement.

Insertion loss (check test): Shall meet initial requirements.

Part number: M15733/73- (dash number from table I).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:31Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics.

Dash No.	Circuit diagram	Rated current (amps) ac (rms) or dc	Minimum insertion loss (dB) in accordance with MIL-STD-220 1/									
			At + 25°C									
			14 kHz	20 kHz	50 kHz	150 kHz	300 kHz	600 kHz	1 MHz	10 MHz	100 MHz	1 GHz
0001	L_1	.5	-	-	-	30	40	50	60	60	60	60
0002	L_2		-	-	-	30	40	50				
0003	L_1		-	-	-	50	60	60				
0004	L_2		-	-	-	50	60	60				
0005	L_1	1.0	-	-	-	30	40	50				
0006	L_2		-	-	-	30	40	50				
0007	L_1		-	-	-	50	60	60				
0008	L_2		-	-	-	50	60	60				
0009	L_1	3.0	-	-	-	30	40	50				
0010	L_2		-	-	-	30	40	50				
0011	L_1		-	-	-	40	50	60				
0012	L_2		-	-	-	40	50	60				
0013	L_1	5.0	-	-	-	30	40	50				
0014	L_2		-	-	-	30	40	50				
0015	L_1		-	-	-	40	50	60				
0016	L_2		-	-	-	40	50	60				

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:31Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics - Continued.

Dash No.	Circuit diagram	Rated current (amps) ac (rms) or dc	Minimum insertion loss (dB) in accordance with MIL-STD-220 1/ At + 25°C									
			14 kHz	20 kHz	50 kHz	150 kHz	300 kHz	600 kHz	1 MHz	10 MHz	100 MHz	1 GHz
0017	$2L_1$	.5	-	10	40	75	80	80	80	80	80	80
0018	$2L_2$	.5	-	10	40	75	80					
0019	$2L_1$	1.0	-	10	40	75	80					
0020	$2L_2$	1.0	-	10	40	75	80					
0021	$2L_1$	3.0	-	-	30	65	80					
0022	$2L_2$	3.0	-	-	30	65						
0023	$2L_1$	5.0	-	-	30	65						
0024	$2L_2$	5.0	-	-	30	65						
0025	$2L_1$	10.0	-	-	10	55						
0026	$2L_2$	10.0	-	-	10	55						
0027	$2L_1$	20.0	-	-	10	55						
0028	$2L_2$	20.0	-	-	10	55						
0029	$2L_1$	30.0	-	-	10	55						
0030	$2L_2$	30.0	-	-	10	55						
0031	$2L_1$	50.0	-	-	10	55						
0032	$2L_2$	50.0	-	-	10	55						

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:31Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics - Continued.

Dash No.	Circuit diagram	Rated current (amps) ac (rms) or dc	Minimum insertion loss (dB) in accordance with MIL-STD-220 1/ At + 25°C									
			14 kHz	20 kHz	50 kHz	150 kHz	300 kHz	600 kHz	1 MHz	10 MHz	100 MHz	1 GHz
0033	Pi	.5	-	-	-	40	60	75	80	80	80	80
0034		.5	-	-	-	60	80	80				
0035		.5	-	-	-	80	80	80				
0036		1.0	-	-	-	40	60	75				
0037		1.0	-	-	-	60	80	80				
0038		1.0	-	-	-	80	80	80				
0039		3.0	-	-	-	40	60	75				
0040		3.0	-	-	-	60	80	80				
0041		3.0	-	-	-	80	80	80				
0042		5.0	-	-	-	40	60	75				
0043		5.0	-	-	-	60	80	80				
0044		5.0	-	-	-	80	80	80				
0045		10.0	-	-	-	40	60	75				
0046		10.0	-	-	-	60	80	80				
0047		10.0	-	-	-	80	80	80				
0048		20.0	-	-	-	40	60	75				
0049		20.0	-	-	-	60	80	80				

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:31Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics - Continued.

Dash No.	Circuit diagram	Rated current (amps) ac (rms) or dc	Minimum insertion loss (dB) in accordance with MIL-STD-220 1/ At + 25°C									
			14 kHz	20 kHz	50 kHz	150 kHz	300 kHz	600 kHz	1 MHz	10 MHz	100 MHz	1 GHz
0050	Pi	30.0	-	-	-	40	60	75	80	80	80	80
0051		30.0	-	-	-	60	80	80				
0052		50.0	-	-	-	40	60	75				
0053		50.0	-	-	-	60	80	80				
0054	T	.5	-	-	-	60	70	70	70	70	70	70
0055		.5	20	28	50	60	60	60	60			
0056		1.0	-	-	-	35	50	60	70			
0057		1.0	20	28	50	60	60	60	60			
0058		3.0	-	-	-	25	40	50				
0059		3.0	20	26	45	60	60	60				
0060		5.0	-	-	-	25	35	45				
0061		5.0	15	18	45	50	55	60				
0062		10.0	-	-	-	25	35	45	50			
0063		10.0	15	18	28	37	45	53	58			
0064		20.0	-	-	-	25	35	45	50			
0065		20.0	15	18	28	37	45	53	58			

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:31Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics - Continued.

Dash No.	Circuit diagram	Rated current (amps) ac (rms) or dc	Minimum insertion loss (dB) in accordance with MIL-STD-220 1/ At + 25°C									
			14 kHz	20 kHz	50 kHz	150 kHz	300 kHz	600 kHz	1 MHz	10 MHz	100 MHz	1 GHz
0066	T	30.0	-	-	-	25	35	45	50	70	70	70
0067		30.0	15	18	28	37	45	53	58			
0068		50.0	-	-	-	25	35	45	50			
0069		50.0	15	18	28	37	43	50	58			

1/ Full-load insertion loss measurements shall be performed over the frequency range of 100 kHz to 20 MHz inclusive. Measurements below or above this frequency shall be performed at no-load.

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - AR, MI
Navy - SH, YD
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - ME, AT, AV
Navy - MC, AS, OS
Air Force - 19

Agent:
DLA - ES

Preparing activity:
Navy - EC

(Project 5915-0240-2)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:31Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER (Number) AND TITLE MIL-F-15733/73 Filters, Radio Frequency Interference, Hermetically Sealed, Style FL55

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY (Printed or typed name and address — Optional)	TELEPHONE NO.
	DATE

DD FORM 1 OCT 76 1426 EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:31Z
Check the source to verify that this is the current version before use.