FED. SUP CLASS
9515

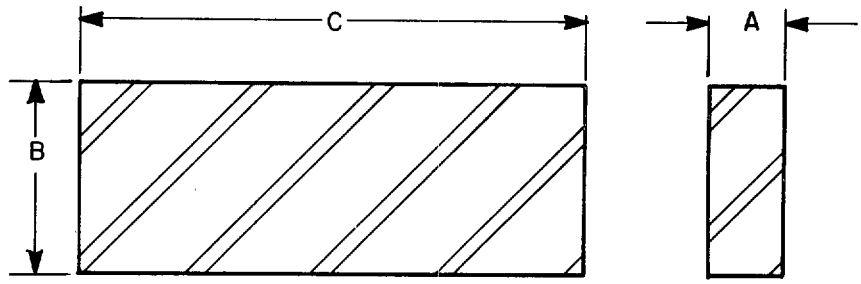



TABLE I. DASH NUMBERS.

| DASH NO | A NOMINAL SIZE INCHES | B NOMINAL SIZE INCHES | C NOMINAL SIZE FEET | HEAT TREATMENT | FORMING 1/ PROCESS | ADDITIONAL 2/ REQUIREMENTS |
|---|---|---|---|---|---|---|
| 001 | .1875 | 50 | 12 | ANNEALED | H | po or sb |
| 003 | .1875 | 60 | 10 | ANNEALED | H | po |
| 005 | .2500 | 24 | 8 | ANNEALED | H | po or sb |
| 007 | .2500 | 48 | 10 | ANNEALED | H | po |
| 009 | .2500 | 50 | 12 | ANNEALED | H | sb |
| 011 | .3125 | 48 | 6 | ANNEALED | H | po |
| 013 | .3125 | 50 | 12 | ANNEALED | H | po or sb |
| 015 | .3125 | 72 | 20 | ANNEALED | H | po |
| 017 | .3750 | 36 | 6 | ANNEALED | H | po or sb |
| 019 | .3750 | 48 | 6 | ANNEALED | H | po |
| 021 | .3750 | 50 | 12 | ANNEALED | H | po or sb |
| 023 | .5000 | 18 | 6 | ANNEALED | H | po |
| 025 | .5000 | 25 | 6 | ANNEALED | H | po or sb |
| 027 | .5000 | 48 | 6 | ANNEALED | H | po |
| 029 | .5625 | 36 | 8 | ANNEALED | H | po |
| 031 | .5625 | 48 | 8 | ANNEALED | H | |
| 033 | .6875 | 36 | 8 | ANNEALED | H | po |
| 035 | .7500 | 48 | 12 | ANNEALED | H | po |
| 037 | .8750 | 48 | 6 | ANNEALED | H | po |
| 039 | 1.0000 | 48 | 12 | ANNEALED | H | po |
| 041 | 1.1250 | 48 | 8 | ANNEALED | H | po |
| 043 | 1.5000 | 21 | 6 | ANNEALED | H | po |
| 045 | 1.5000 | 48 | 6 | ANNEALED | H | po |
| 047 | 1.7500 | 48 | 6 | ANNEALED | H | po |
| 049 | 2.0000 | 48 | 6 | ANNEALED | H | po |

1/ SEE REQUIREMENT 2
2/ SEE REQUIREMENT 3

USER ACTIVITIES:

REVIEWER ACTIVITIES:
AIR FORCE - 84
DLA - IS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

APPROVED 28 FEB 1985 REVISED

| P.A. | AS | INTERNATIONAL INTEREST | TITLE | MILITARY STANDARD |
|---|---|---|---|---|
| Other Cust | MR 99 | | PLATE, METAL, CORROSION RESISTANT, TYPE 304 | MS14446 |
| PROCUREMENT SPECIFICATION: QQ-S-766 | | SUPERSEDES: | | PAGE 1 OF 2 |

DD FORM 1 MAY 73 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 9515-0490

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:43Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. MATERIAL. STEEL, CORROSION RESISTANT, TYPE 304 (UNS S30400) AS SPECIFIED IN PROCUREMENT DOCUMENT.

2. FORMING PROCESS. HOT FINISHED - CODE "H"

3. ADDITIONAL REQUIREMENTS. (SEE REQUIREMENT 3)

| | | |
|---|---|---|
| DESCALED | OVERALL | - CODE "ds" |
| PICKLED | OVERALL | - CODE "po" |
| SANDBLASTED | OVERALL | - CODE "sb" |

4. PART NUMBER. THE PART NUMBER CONSISTS OF THE BASIC MS NUMBER, PLUS A FORMING PROCESS CODE, PLUS A DASH NUMBER FROM TABLE I.

EXAMPLE: MS14446H001

- (SEE TABLE I)
- HOT FINISHED (SEE REQUIREMENT 2)
- BASIC MS NUMBER

5. MARKING. IRON AND STEEL PRODUCTS SHALL BE MARKED IN ACCORDANCE WITH FED-STD-183 WITH THE EXCEPTION THAT A PART NUMBER FROM THIS MILITARY STANDARD SHALL BE INCLUDED AS PART OF THE IDENTIFICATION MARKING.

NOTES:

1. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BIDS, OR REQUEST FOR PROPOSAL, EXCEPT THE REFERENCED ADOPTED INDUSTRY DOCUMENTS SHALL GIVE THE DATE OF THE ISSUE ADOPTED.

2. FOR DESIGN FEATURE PURPOSES THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

APPROVED 28 FEB 1985 REVISED

USER ACTIVITIES:

REVIEWER ACTIVITIES:
AIR FORCE - 84
DLA - IS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

| P.A. | INTERNATIONAL INTEREST | TITLE | MILITARY STANDARD |
|---|---|---|---|
| AS | | PLATE, METAL, CORROSION RESISTANT, TYPE 304 | MS14446 |
| Other Cust MR 99 | | | |
| PROCUREMENT SPECIFICATION: QQ-S-766 | SUPERSEDES: | | PAGE 2 OF 2 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:43Z
Check the source to verify that this is the current version before use.