
Project No. 5306-0468

FED. SUP CLASS 5306

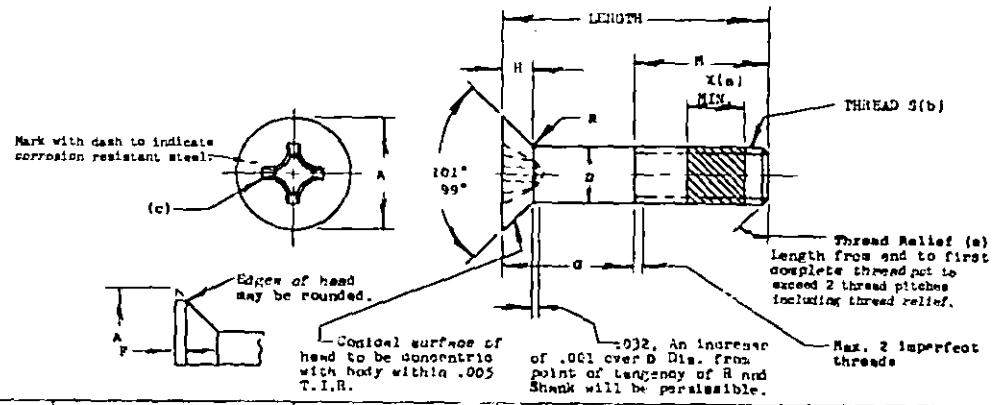

DASH NO DIA	(b) THREAD S	D DIA MAX	D DIA MIN	A DIA MAX SHARP	A DIA MIN SHARP	A DIA ABSOLUTE MIN WITH MAX F	F MAX	(d) H MIN	M REF	R RAD MAX	R RAD MIN	(f) TENSILE STRENGTH LBS MIN	DOUBLE SHEAR STRENGTH LBS MIN	DRIVER SIZE
04	.112-40UNC-3A	.1120	.0925	.225	.207	.200	.010	.044	.250	.015	.003	480	930	1
06	.138-32UNC-3A	.1380	.1141	.279	.257	.249	.014	.055	.312			720	1,420	
08	.164-32UNC-3A	.1640	.1610	.332	.319	.283	.015	.068	.437			1,120	2,030	2
3	.190-32UNF-3A	.1890	.1860	.385	.371	.327	.016	.080	.469			1,600	2,720	
4	.250-28UNF-3A	.2490	.2460	.507	.491	.447	.018	.106	.506			2,910	4,700	3
5	.3125-24UNF-3A	.3115	.3085	.635	.617	.569	.020	.133	.531	.020	.010	4,640	7,370	4
6	.375-24UNF-3A	.3740	.3710	.762	.742	.686	.023	.159	.641			7,020	10,600	
7	.4375-20UNF-3A	.4365	.4325	.890	.868	.805	.026	.186	.656			9,490	14,400	
8	.500-20UNF-3A	.4990	.4950	1.017	.992	.919	.030	.213	.781			12,790	18,800	
9	.5625-18UNF-3A	.5615	.5575	1.145	1.118	1.036	.034	.240	.906			16,250	23,900	

(a) Location of effective locking area X shall be in accordance with MS15981
(b) Threads shall be formed by any single rolling process and in accordance with Specificatic.. MIL-S-7742 & HDBK H28
(c) Dimensioning and gaging of recess design shall be in accordance with H39006.
(d) Reference dimensions are for design purposes only and are not an inspection or manufacturing requirement.
(e) Chamfer 45° ±5° Chamfer to extend to root of thread
(f) Based on 80,000 PSI ultimate tensile strength, and stress area = $3.1416 (E/2 - 3H/16)^2$. See Handbook H-28 (1957) Part I.

MATERIAL: Corrosion Resisting Steel that will provide in the finished bolt the strength and permeability specified.
TREATMENT: Passivated (See Procurement Specification).
SURFACE ROUGHNESS: The surface of the shank, fillet and bearing area shall not exceed 125 micro-inches. per ANSI(USAS)B46.1(1962)
LOCKING ELEMENT: In accordance with Specification MIL-F-18240. Locking element area, with locking element incorporated, must pass thru a ring gage equal to maximum major thread diameter +.003" freely or with finger pressure.
MAGNETIC PERMEABILITY: These bolts have a magnetic permeability of 2.0 maximum (air = 1.0) for a field of H = 200 oersteds using magnetic indicator per MIL-I-17214.
DESIGN AND USAGE LIMITATIONS: See MS15981.
DIMENSIONS IN INCHES.
DIMENSIONS & TOLERANCES: In accordance with ANSI(USASI)Y14.5(1966).

EXAMPLE OF PART NUMBER: MS21092-4008= .250-28 Bolt, .500 Grip

GRIP DASH NUMBER
DIAMETER DASH NUMBER

FOR DESIGN FEATURE PURPOSES THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

(A) REVISED

P.A. Navy - AS Other Cust USAF - 11 ARMY - AV	TITLE BOLT, SELF-LOCKING, 250° F, CRES, 48 KSI Fsu, 80 KSI Ftu, 100° FLUSH HEAD, CROSS RECESSED	MILITARY STANDARD MS21092
PROCUREMENT SPECIFICATION MIL-S-[illegible] & MIL-F-18240	SUPERSEDES MS21092(ABG)	SHEET 1 OF 2

DD FORM 672-1 (Coordinated) PREVIOUS EDITION OF THIS FORM ARE OBSOLETE.

APPROVED 2 Nov 65 REVISED (A) 30 Sep 70

USER SYMBOLS:
REVIEWER SYMBOLS: NAVY - AS USAF - 11 ARMY - AV

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

This military standard is mandatory for use by all Departments & Agencies of the Department of Defense. Suggestions for improvements in engineering and design applications are welcome and should be made from this document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:27Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5306

LENGTH DASH NO.(a)	GRIP ± .010	LENGTH ±.031 -.015									
		.112-40	.138-32	.164-32	.190-32	.250-28	.3125-24	.375-24	.4375-20	.500-20	.5625-18
002	.125	.375	.437	.562							
003	.187	.437	.500	.625	.781						
004	.250	.500	.562	.687	.656	.719					
005	.375	.625	.687	.812	.781	.844	.906	1.017			
006	.500	.750	.812	.937	.906	.969	1.031	1.142	1.156	1.281	
010	.625	.875	.937	1.062	1.031	1.094	1.156	1.268	1.281	1.406	1.531
012	.750	1.000	1.062	1.187	1.156	1.219	1.281	1.391	1.406	1.531	1.656
014	.875	1.125	1.187	1.312	1.281	1.344	1.406	1.516	1.531	1.656	1.781
016	1.000	1.250	1.312	1.437	1.406	1.469	1.531	1.641	1.656	1.781	1.906
018	1.125	1.375	1.437	1.562	1.531	1.594	1.656	1.766	1.781	1.906	2.031
020	1.250	1.500	1.562	1.687	1.656	1.719	1.781	1.891	1.906	2.031	2.156
022	1.375	1.625	1.687	1.812	1.781	1.844	1.906	2.016	2.031	2.156	2.281
024	1.500	1.750	1.812	1.937	1.906	1.969	2.031	2.141	2.156	2.281	2.406
026	1.625	1.875	1.937	2.062	2.031	2.094	2.156	2.266	2.281	2.406	2.531
028	1.750	2.000	2.062	2.187	2.156	2.219	2.281	2.391	2.406	2.531	2.656
030	1.875		2.187	2.312	2.281	2.344	2.406	2.516	2.531	2.656	2.781
032	2.000		2.312	2.437	2.406	2.469	2.531	2.641	2.656	2.781	2.906
034	2.125		2.437	2.562	2.531	2.594	2.656	2.766	2.781	2.906	3.031
036	2.250		2.562	2.687	2.656	2.719	2.781	2.891	2.906	3.031	3.156
038	2.375		2.687	2.812	2.781	2.844	2.906	3.017	3.031	3.156	3.281
040	2.500		2.812	2.937	2.906	2.969	3.031	3.141	3.156	3.281	3.406
042	2.625				3.031	3.094	3.156	3.266	3.281	3.406	3.531
044	2.750				3.156	3.219	3.281	3.391	3.406	3.531	3.656
046	2.875				3.281	3.344	3.406	3.516	3.531	3.656	3.781
048	3.000				3.406	3.469	3.531	3.641	3.656	3.781	3.906
050	3.125				3.531	3.594	3.656	3.766	3.781	3.906	4.031
052	3.250									4.031	4.156
054	3.375									4.156	4.281
056	3.500									4.281	4.406
058	3.625									4.406	4.531
060	3.750									4.531	4.656
062	3.875									4.656	4.781
064	4.000									4.781	4.906
066	4.125									4.906	5.031

(a) Unassigned dash numbers shall not be used except those dash numbers included by the following coding note: Dash numbers indicate preferred grip lengths in .125 increments for lengths longer than .250 inches. Intermediate grip lengths between those lengths listed may be specified in .062 increments by intermediate dash numbers. Length and grip of a bolt with an odd number for the dash number will be .062 greater than shown for the bolt with the preceding even dash number.

REVISED (A) FOR CHANGES SEE SHEETS 1 & 2
APPROVED 2 Dec 65

P.A. Navy - AS Other Cust USAF - 11 ARMY - AV	TITLE BOLT, SELF-LOCKING, 250° F., CRES, 48 KSI Fsu, 80 KSI Ftu, 100° FLUSH HEAD, CROSS RECESSED	MILITARY STANDARD MS21092
PROCUREMENT SPECIFICATION MIL-S-7838 & MIL-F-18240	SUPERSEDES: MS21092(ASG)	SHEET 2

DD FORM 672-1 (Coordinated)

REVIEW SYMBOLS:
NAVY - AS
USAF - 11
ARMY - AV

USER SYMBOLS:

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

This military standard is mandatory for use by all Departments & Agencies of the Department of Defense. Selection for all engineering and design applications and for repetitive use shall be made from this document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:27Z
Check the source to verify that this is the current version before use.