
FED SUP CLASS
5340

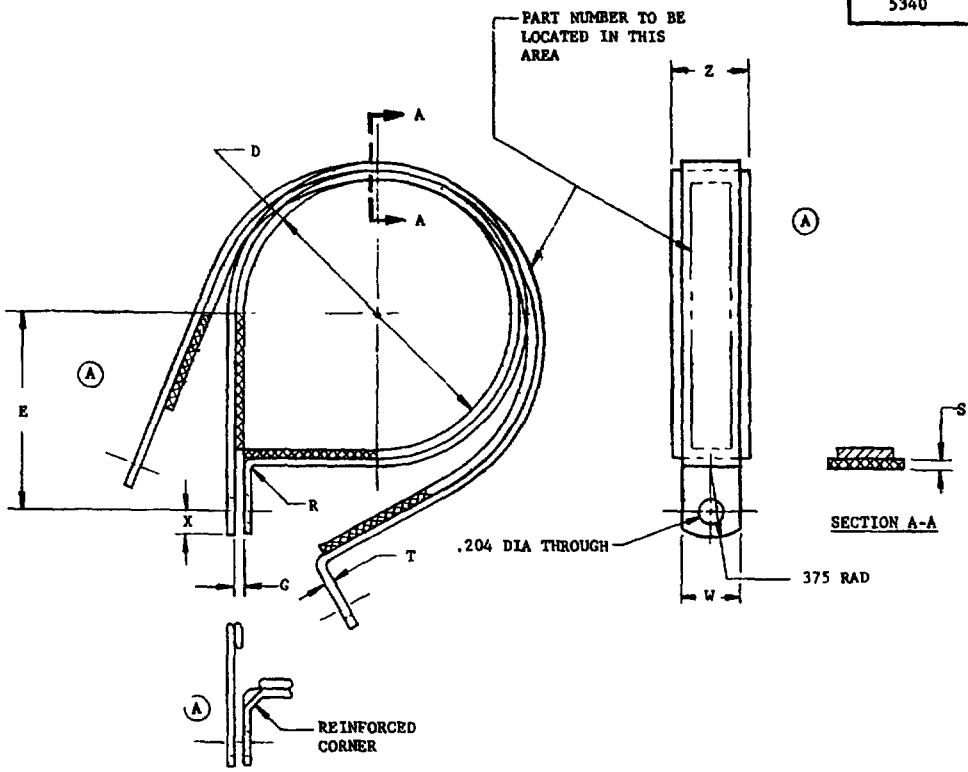

NOTES

1 CLAMP BAND CORROSION RESISTANT STEEL, COMPOSITION TYPE Ti OR Cb, PER MIL-S-6721, ANNEALED.
(A) CUSHION CORROSION RESISTANT STEEL, TYPE 321 OR 347 PER MIL-S-6721

2 PROTECTIVE TREATMENT PASSIVATE PER QQ-P-35

3 REMOVE ALL BURRS AND SHARP EDGES

4 DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED, TOLERANCES DECIMALS ± 015.

5. DIMENSION D IS APPLICABLE IN CLOSED POSITION ONLY.

6 EXAMPLE OF PART NUMBER MS21106-8 = CUSHION CLAMP, CRES, 500 ID, 1200°F.

7. THE MS PART NUMBER, INCLUDING DASH NUMBER, AND MANUFACTURER'S IDENTIFICATION, SHALL BE MARKED ON EACH CLAMP.

8 CLAMPS SHALL BE FURNISHED IN THE OPEN POSITION.

9 METHOD OF CUSHION ATTACHMENT TO BAND IS OPTIONAL

(A) 10. REINFORCED CORNER IS MANDATORY

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

(A) FOR CHANGES SEE SHEETS 1 AND 2

APPROVED 1 JUL 67 REVISED (A) 2 DEC 1970

P.A. NAVY - AS Other Cust USAF - 82 ARMY - AV	TITLE CLAMP, LOOP, CUSHIONED, 1200°F, CRES TYPE IV, CLASS B	MILITARY STANDARD MS21106
PROCUREMENT SPECIFICATION MIL-C-8956	SUPERSEDES MS21106(ASG)	SHEET 1 OF 2

DD FORM 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE PLATE NO. 16320

REVIEWER SYMBOLS: NAVY - AS USAF - 82 ARMY - AV
USER SYMBOLS:

"Revised/later information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

This military standard is mandatory for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:27Z
Check the source to verify that this is the current version before use.

FED SUP CLASS
5340

DASH NUMBERS	RIGID TUBE NOMINAL OD (REF)	DIMENSIONS D ±.015 DIA	E ±.015	G	R ±.016 RAD	S ±.016 -.000	T	W ±.015	X ± 015	Z MAX
-2	1/8	.125	.457							
-3	3/16	.188	.498							
-4	1/4	.250	.529							
-5	5/16	.313	.560		.062			.375	.188	497
-6	3/8	.375	.592							
-7	7/16	.438	.623	.062						
-8	1/2	.500	.654	+.016						
-9	9/16	.563	.749	-.000						
-10	5/8	.625	.780							
-11	11/16	.688	.811							
-12	3/4	.750	.842							
-13	13/16	.813	.858		.109					622
-14	7/8	.875	.889							
-15	15/16	.938	.920							
-16	1	1.000	.951				.0320			
-17	1- 1/16	1.063	.983				± 0035			
-18	1- 1/8	1.125	1.030							
-19	1- 3/16	1.188	1.061							
-20	1- 1/4	1.250	1.092							
-21	1- 5/16	1.313	1.124							
-22	1- 3/8	1.375	1.155							
-23	1- 7/16	1.438	1.186	.094						
-24	1- 1/2	1.500	1.217	+.031		062				
-25	1- 9/16	1.563	1.259	-.000						
-26	1- 5/8	1.625	1.280							
-27		1.688	1.312							
-28	1- 3/4	1.750	1.342							
-29		1.813	1.374							
-30	1- 7/8	1.875	1.405					.500	218	
-31		1.938	1.444							
-32	2	2.000	1.475							
-33		2.062	1.507							
-34	2- 1/8	2.125	1.538		125					656
-35		2.188	1.570							
-36	2- 1/4	2.250	1 600							
-37		2.312	1.631							
-38	2- 3/8	2.375	1.663							
-40	2- 1/2	2.500	1.728							
-42		2.625	1.788	.125			040			
-43		2.688	1.820	+.031			± 004			
-44	2- 3/4	2.750	1.851	-.000						
-45		2.812	1.882							
-46		2.875	1.913							
-48	3	3.000	1.976							
-50		3.125	2.038							
-52	3- 1/4	3.250	2.101							
-54		3.375	2.163							
-56	3- 1/2	3.500	2.226							
-58		3.625	2.288							
-64	4	4.000	2.476							
-66		4.125	2.538							

APPROVED 1 JULY 67 REVISED (A) FOR CHANGES SEE SHEETS 1 AND 2

P.A. NAVY - AS Other Cust USAF - 82 ARMY - AV	TITLE CLAMP, LOOP, CUSHIONED, 1200°F, CRES TYPE IV CLASS B	MILITARY STANDARD MS21106
PROCUREMENT SPECIFICATION MIL-C-8956	SUPERSEDES MS21106(ASG)	SHEET 2

DD FORM 1 SEP 67 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

PLATE NO 15320

USER SYMBOLS:

REVIEWER SYMBOLS:
NAVY - AS
USAF - 82
ARMY - AV

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

This military standard is mandatory for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Source: https://assist.dla.mil -- Downloaded: 202610-23T14:27Z
Check the source to verify that this is the current version before use.