
FED. SUP CLASS
6240

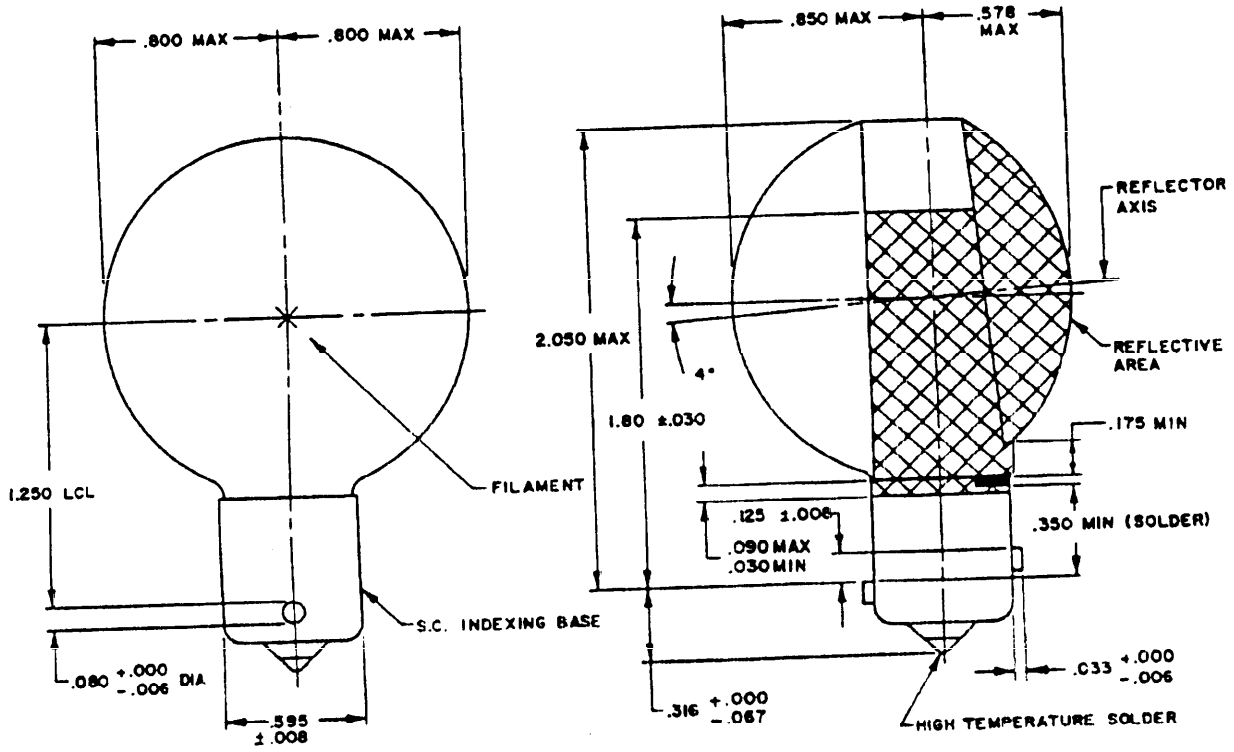

DASH NO.	TYPE PER MIL-L-6363	TEMP RATING CONTINUOUS OPERATION °C	°F	RATINGS VOLTS	AMPERES	WATTS	RATED LIFE HOURS	FILAMENT
-2079	II	154	310	28	1.55	40	150	CC-6
-617	II	176	350	28	1.55			CC-6
-168*	II	154	310	6.2	7.10			C-6

REQUIREMENTS:

1. LIGHT DISTRIBUTION:
   CANDLEPOWER, 4800 MIN ON REFLECTOR AXIS
   HORIZONTAL AND VERTICAL BEAM SPREAD TO 480 CANDELA POINTS, 20° MIN.

NOTES:

1. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.010 INCH, ANGLES ±5°.
2. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
3. INTENDED USE - AIRCRAFT LIGHT ASSEMBLIES CONFORMING TO MIL-L-6363, (MS21972 AND MS25237 AND SIMILAR.

(E) CANCELLED AS OF 1 JUNE 1989 FOR NEW PROCUREMENTS USE MIL-L-6363/1

APPROVED 8 Sep 58 REVISED (A) 26 Jul 60 (B) 1 Oct 64 (C) 26 Oct 66 (D) 15 OCT 1986 (E) 1 JUNE 1989

Review Activities:
Navy - MC
USAF - 82
DLA - CS

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited. This standard has been approved by the Naval Air Systems Command and the Department of the USAF and is mandatory for use by that activity. All other military activities are required to apply this standard where suitable.

P.A. Navy - AS	TITLE	MILITARY STANDARD
Other Cust USAF - 99	LAMP, INCANDESCENT -SINGLE CONTACT BAYONET CANDELABRA, GG-12A1 BULB	MS25338
PROCUREMENT SPECIFICATION MIL-L-6363	SUPERSEDES	SHEET 1 OF 1

Source: https://assist.dla.mil -- Downloaded: 202610-23T15:08Z
Check the source to verify that this is the current version before use.

DD FORM 672-1 PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 6240-1098