THIS SPECIFI... IS APPROVED FOR USE BY all Departments and Agencies of the D... rtment of Defense.

REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL ... .T OF THIS
.CIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN TH... SUE OF TH...
DODISS SPECIFIED IN THE SOLICITATION MIL-T-27535.

Form Approved
OMB No 0704-0188

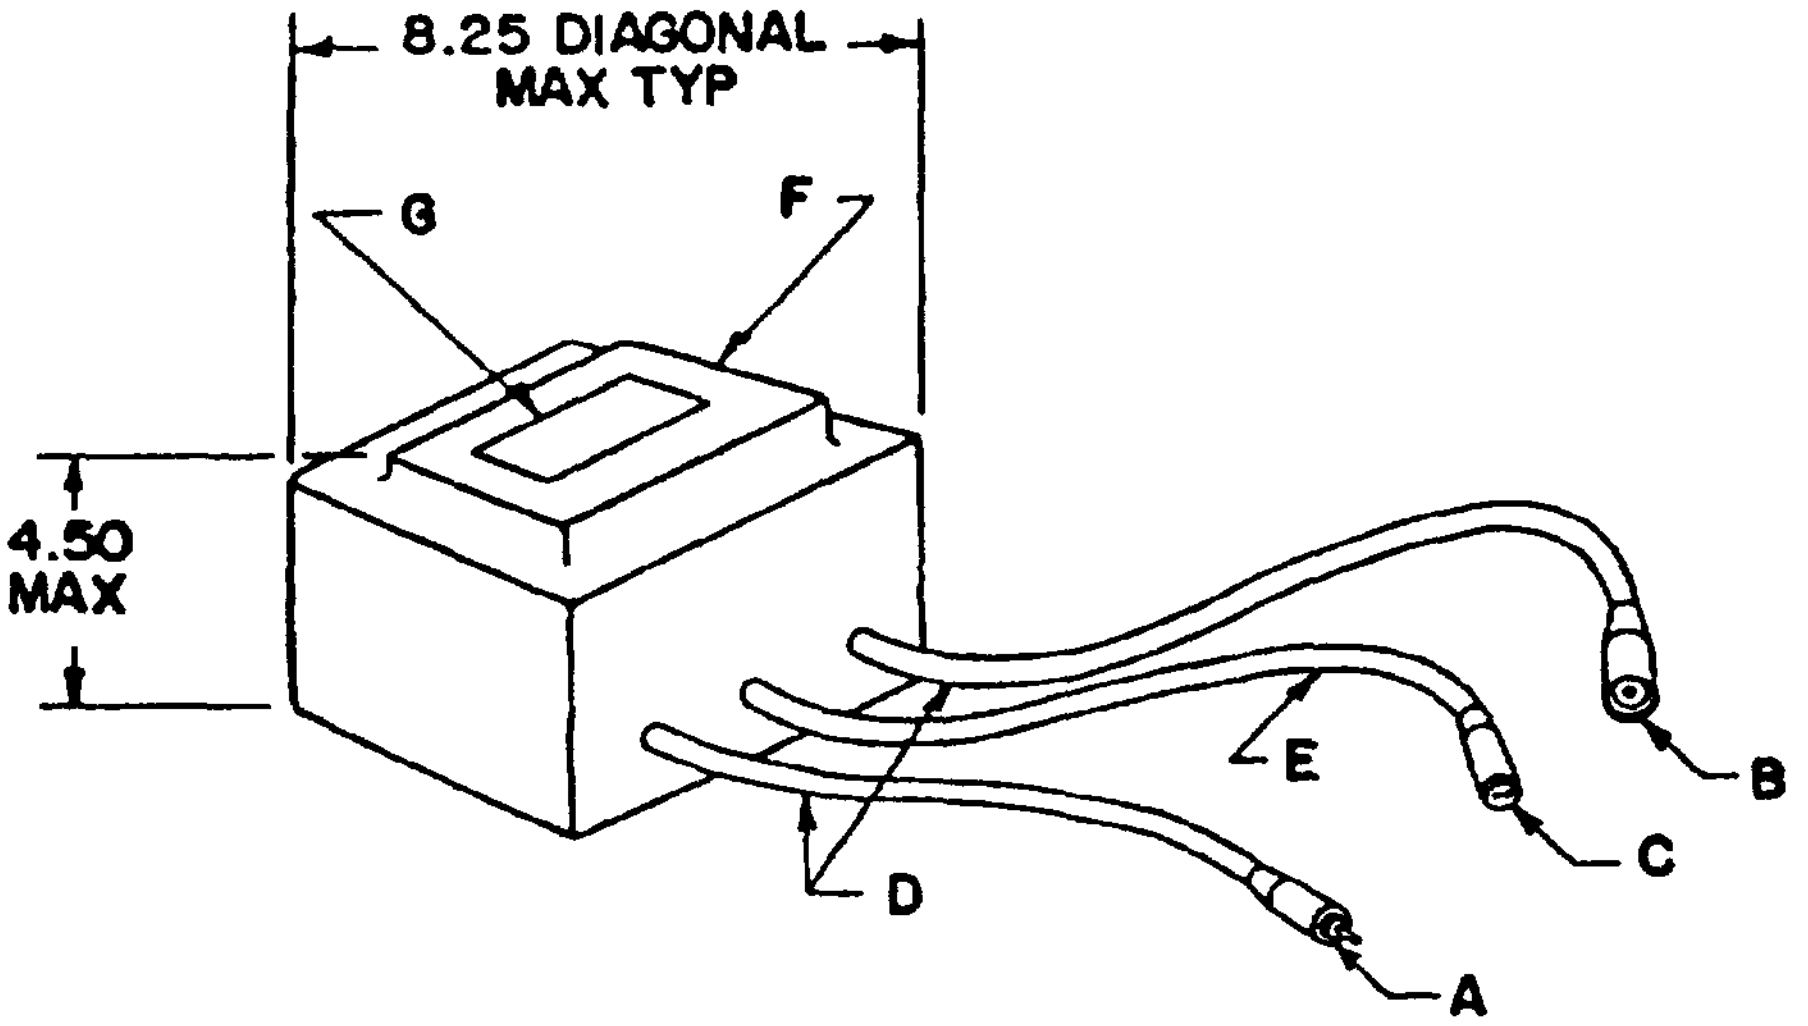

Ⓒ ENVELOPE OPTION 1

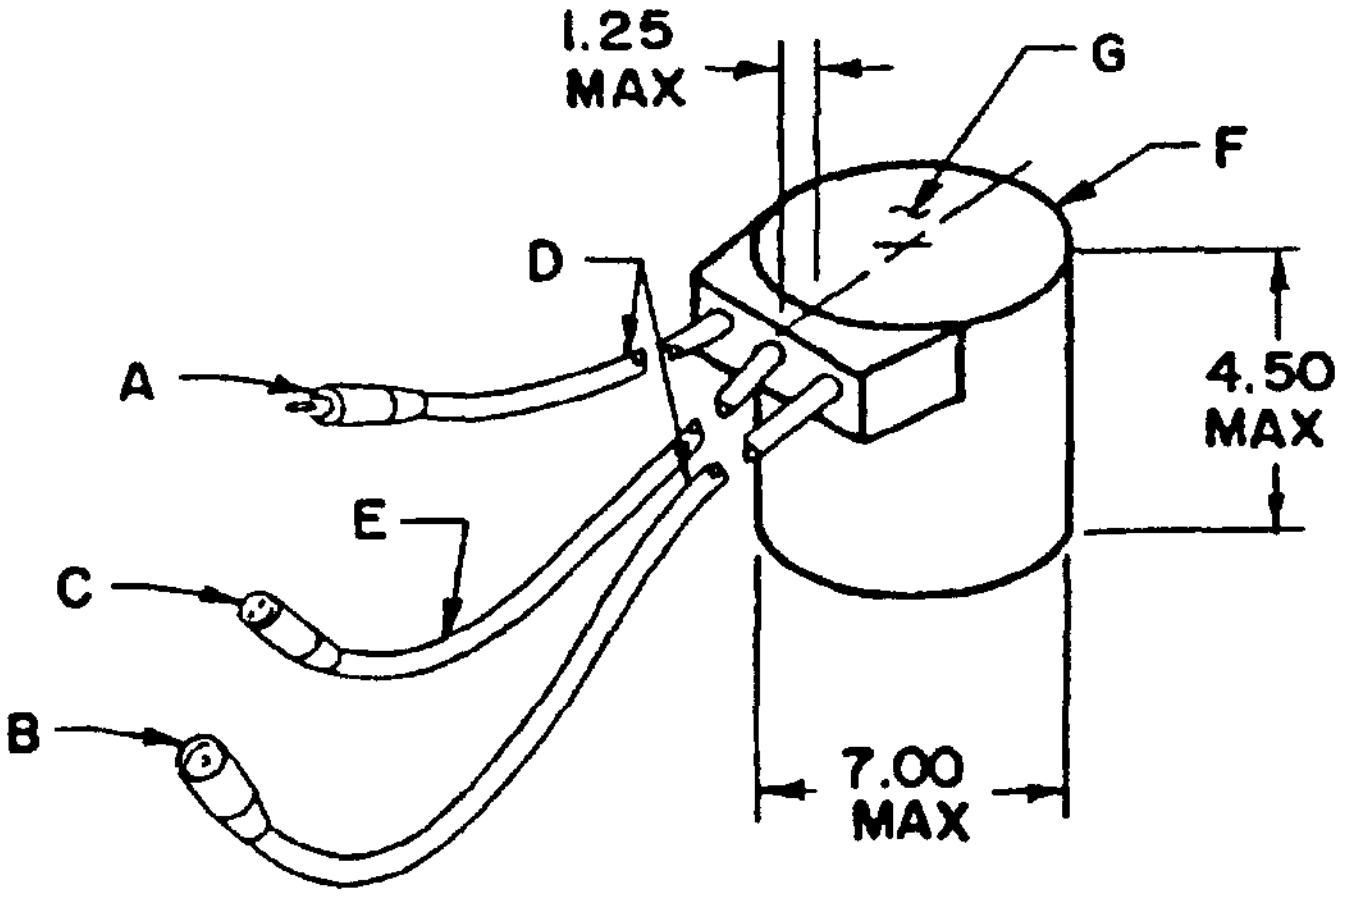

Ⓒ ENVELOPE OPTION 2

Ⓒ Denotes Changes

PREPARING ACTIVITY Air Force-85 **CUSTODIANS ARMY** **NAVY** **AIR FORCE - 85** **DLA** **REVIEW** Navy-AS, YD Air Force-99, 11, DLA-ES **USER** **PROJECT NUMBER** 5950-0763	**MILITARY SPECIFICATION SHEET** **TITLE** TRANSFORMER, POWER, ISOLATION, AIRPORT LIGHTING 30-45W/6 6A/6 6A/5000V	**SPECIFICATION SHEET NUMBER** MS27289C 15 Nov 1990 **SUPERSEDING** MS27289B 18 Aug 1965 **AMSC** N/A **FSC** 5950
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited		**Page** 1 **of** 2

Source: https://assist.dla.mil -- Downloaded: 202610-23T15:21Z
Check the source to verify that this is the current version before use.

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(s) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION MIL-T-27535

THIS SPECIFICATION IS APPROVED FOR USE BY all Departments and Agencies of the Department of Defense.

Form Approved
OMB No 0704 0188

ELECTRICAL CHARACTERISTICS

PRI AMP	PRI PWR FACTOR MIN %	EFFICIENCY MIN %	MAX SEC VOLTS RMS	SECONDARY AMPS	LOAD
6 6	95	80		6 53-6 67	1 1 OHMS (a)
6 6				6 6 -7 1	SHORT CIRCUITED
6 6			25	0	OPEN CIRCUITED
5.2				5 1 -5 4	0 9 OHMS (a)
4.1				4 0 -4 3	0 7 OHMS (a)
3 4				3 3 -3 6	0.6 OHMS (a)
2.8				2.7 -3 0	0 5 OHMS (a)

(a) THE LOAD MAY BE EITHER A 45W, 6 6A LAMP OR THE OHMIC RESISTANCE SPECIFIED.

A PLUG FIGURE 6a FAA SPECIFICATION L-823.
B RECEPTACLE FIGURE 6b FAA SPECIFICATION L-823
C RECEPTACLE FIGURE 1c FAA SPECIFICATION L-823
D. PRIMARY CABLE
E. SECONDARY CABLE
F. CASE
G IDENTIFICATION MARKING (LOCATION OPTIONAL)

PART NO	LEAD LENGTH INCHES	
	D	E
MS27289-1	30 ±3	54 ±3

IN COMPUTING EFFICIENCY, CORRECTION SHALL BE MADE FOR LEAD LOSSES

MAXIMUM WEIGHT 10 POUNDS

DIMENSIONS IN INCHES.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID

PREPARING ACTIVITY Air Force-85 **CUSTODIANS ARMY** **NAVY** **AIR FORCE** 85 **DLA** **REVIEW** Navy-AS, YD Air Force-99, 11, DLA-ES **USER** **PROJECT NUMBER** 5950-0763	**MILITARY SPECIFICATION SHEET** **TITLE** TRANSFORMER, POWER, ISOLATION, AIRPORT LIGHTING 30-45W/6.6A/6.6A/5000V	**SPECIFICATION SHEET NUMBER** MS27289C **SUPERSEDING** MS27289B 18 Aug 1965 **AMSC** N/A **FSC** 5950
DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.		**Page** 2 **of** 2

Source: https://assist.dla.mil -- Downloaded: 2025-10-23T15:21Z
Check the source to verify that this is the current version before use.

* U S GOVERNMENT PRINTING OFFICE: 1988 740-979,60020