

THIS SPECIFICATION IS APPROVED FOR USE BY all Departments and Agencies of the Department of Defense

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THE DODISS SPECIFIED IN THE SOLICITATION. MIL-T-27535, ISSUE OF THE

Form Approved
OMB No 0704-0188

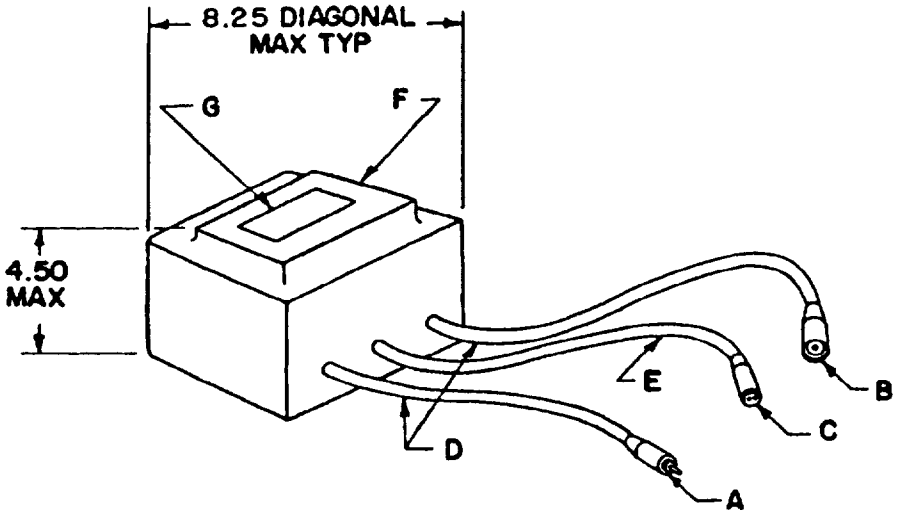

© ENVELOPE OPTION 1

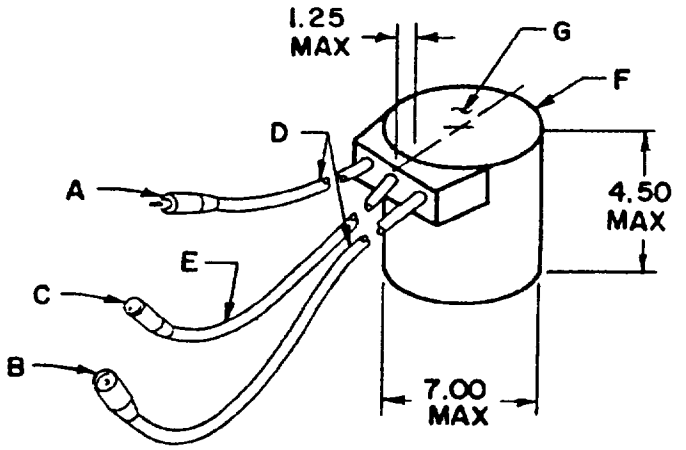

© ENVELOPE OPTION 2

© Denotes Changes

PREPARING ACTIVITY Air Force-85 CUSTODIANS ARMY NAVY- AIR FORCE - 85 DLA - Navy-YD REVIEW Air Force-99, 11; DLA-ES USER PROJECT NUMBER 5950-0760	MILITARY SPECIFICATION SHEET TITLE TRANSFORMER, POWER, ISOLATION; AIRPORT LIGHTING, 500W/20A/20A/5000V	SPECIFICATION SHEET NUMBER MS27302C 15 Nov 1990 SUPERSEDING MS27302B 18 Aug 1965 AMSC - N/A FSC - 5950
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited		Page 1 of 2

Source: https://assist.dla.mil -- Downloaded: 20260-23115:212
Check the source to verify that this is the current version before use.

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION MIL-T-27535

THIS SPECIFICATION IS APPROVED FOR USE BY all Departments and Agencies of the Department of Defense

Form Approved
OMB No 0704-0188

ELECTRICAL CHARACTERISTICS					
PRI AMP	PRI PWR FACTOR MIN %	EFFICIENCY MIN %	MAX SEC VOLTS RMS	SECONDARY AMPS	LOAD
20	95	90		19 8-20 2	1 3 OHMS (a)
20				20.0-22 0	SHORT CIRCUITED
20			70	0	OPEN CIRCUITED
15.8				15 6-16 3	1.1 OHMS (a)
12 4				12 2-12 9	0 9 OHMS (a)
10.3				10 2-10 8	0.8 OHMS (a)
8.5				8 4- 8 9	0 7 OHMS (a)

(a) THE LOAD MAY BE EITHER A 500W, 20A LAMP OR THE OHMIC RESISTANCE SPECIFIED.

A PLUG FIGURE 6a FAA SPECIFICATION L-823

B RECEPTACLE FIGURE 6b FAA SPECIFICATION L-823

C RECEPTACLE FIGURE 1c FAA SPECIFICATION L-823

D. PRIMARY CABLE

E. SECONDARY CABLE.

F. CASE

G IDENTIFICATION MARKING (LOCATION OPTIONAL)

PART NO	LEAD LENGTH INCHES	
	D	E
MS27302-1	30 ±3	54 ±3

IN COMPUTING EFFICIENCY, CORRECTION SHALL BE MADE FOR LEAD LOSSES

MAXIMUM WEIGHT 25 POUNDS

DIMENSIONS IN INCHES.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN

REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID

PREPARING ACTIVITY Air Force-85
CUSTODIANS ARMY NAVY-
AIR FORCE 85 DLA-
Navy-YD
REVIEW Air Force-99, 11, DLA-ES
USER
PROJECT NUMBER 5950-0760

MILITARY SPECIFICATION SHEET
TITLE TRANSFORMER, POWER, ISOLATION: AIRPORT LIGHTING, 500W/20A/20A/5000V

SPECIFICATION SHEET NUMBER
MS27302C
SUPERSEDING
MS27302B 18 Aug 1965
AMSC- N/A FSC 5950

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:21Z
Check the source to verify that this is the current version before use.

DD Form 672, MAY 88 Previous editions are obsolete
* U S GOVERNMENT PRINTING OFFICE: 1988-740-979/80478