
FED. SUP CLASS
4730

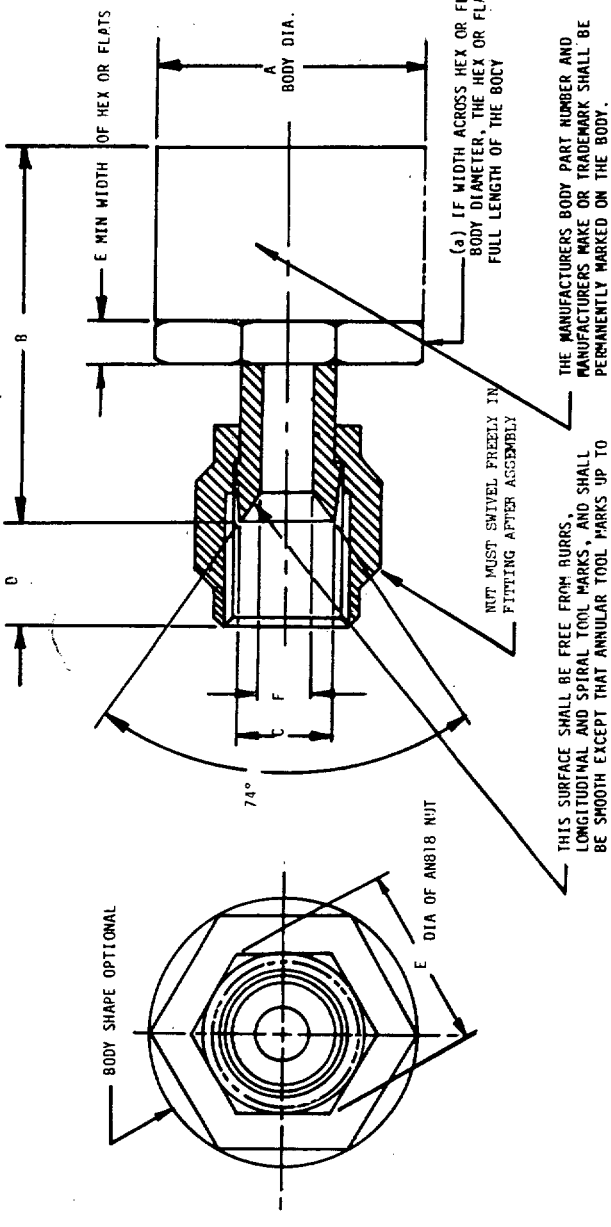

MS PART NO.	J	NOMINAL TUBING AND HOSE SIZE REF	(c) NUT	A MAX DIA	B MAX	(b)C DIA		D ±.030	E MIN	F MIN DIA	H REF	WEIGHT LB APPROX
MS28752-10		5/8	AN818-10D	1.562	2.375	.680	+.005	.500	.312	.469	1.155	.176
MS28752-12		3/4	AN818-12D	1.688	2.625	.850	-.000	.563	.375	.594	1.443	.263
MS28752-16		1	AN818-16D	2.125	2.750	1.103	±.005	.594	.375	.810	1.732	.347
MS28752-20		1-1/4	AN818-20D	2.438	2.875	1.410		.625	.500	1.042	2.309	.510
MS28752-24		1-1/2	AN818-24D	2.688	3.000	1.625		.734	.625	1.276	2.598	.660
MS28752-32		2	AN818-32D	3.250	3.375	2.240		.922	.750	1.745	3.320	1.888

APPROVED 2 DEC 54 REVISED (A) 16 APR 82 (B) 8 Aug 85

(B) REINSTATED 8 AUG 1985

USER ACTIVITIES:

REVIEWER ACTIVITIES: Army - AV
AIR FORCE - 85
DLA - CS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document

P. A. AF - 82 Other Cust AIR FORCE - 99 ARMY - ME NAVY - AS	INTERNATIONAL INTEREST	TITLE FITTING END, SELF SEALING FUEL HOSE, SWIVEL, DETACHABLE	MILITARY STANDARD MS 28752
PROCUREMENT SPECIFICATION	SUPERSEDES:		SHEET 1 OF 2

DD FORM 1 MAY 73 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

(Project 4730-0760)

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited."

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:58Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
4730

(a) HEX OR FLATS SHALL FIT STANDARD WRENCH OPENINGS.
(b) DIMENSION C OF CONICAL SEAT TO BE CONCENTRIC WITH OD OF NIPPLE WITHIN .005 FULL INDICATOR READING.
(c) A NON-STANDARD SWIVEL NUT MAY BE USED PROVIDED THE HEX DIMENSION AND THE THREAD DIMENSIONS ARE IN ACCORDANCE WITH AN818 AND PROVIDED THE NUT CANNOT BE REMOVED FROM THE ASSEMBLY.

THE MS PART NUMBER SHALL BE MARKED ON A REMOVABLE TAG SECURELY ATTACHED TO THE END FITTING ASSEMBLY.
MATERIAL: ALUMINUM ALLOY
BREAK ALL SHARP EDGES AND REMOVE ALL HANGING BURRS AND SLIVERS WHICH MIGHT BECOME DISLODGED UNDER USAGE.
THESE FITTINGS ARE FOR USE WITH MIL-H-18288 HOSE AS SHOWN ON DRAWING MS 28756.
THE AIRPLANE MANUFACTURED SHALL ALLOW CLEARANCE FOR THE MAXIMUM DIMENSIONS SHOWN ON THIS DRAWING FOR INSTALLATION.
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCE: ANGLE $\pm$ 1/2°.

1. Referenced documents shall be of the issue in effect on date of invitations for bids or request for proposal, except that referenced adopted industry documents shall give the date of the issue adopted.

2. For design feature purposes, this standard takes precedence over procurement documents referenced herein.

APPROVED 2 DEC 1954 REVISED FOR CHANGES SEE PAGE 1 & 2

USER ACTIVITIES:

REVIEWER ACTIVITIES: ARMY - AV
AIR FORCE - 85
DLA - CS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document

P. A. AF - 82 Other Cost AIR FORCE - 99 ARMY - ME NAVY - AS	INTERNATIONAL INTEREST	TITLE FITTING END, SELF SEALING FUEL HOSE, SWIVEL, DETACHABLE.	MILITARY STANDARD MS 28752
PROCUREMENT SPECIFICATION	SUPERSEDES:		SHEET 2 OF 2

DD FORM 1 MAY 73 672-1 (COORDINATED)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:58Z
Check the source to verify that this is the current version before use.