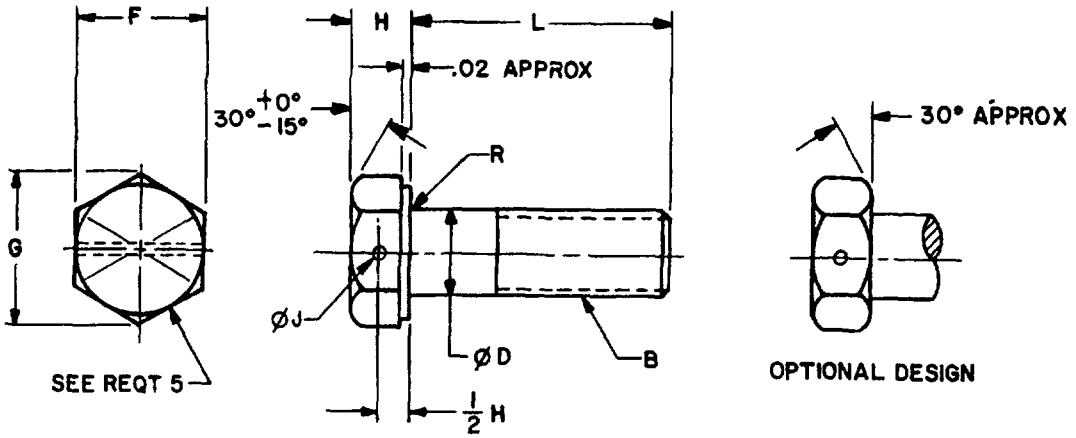


TABLE I. DIMENSIONS AND PART NUMBERS

NOMINAL SIZE			.375	.437	.500	.625	.750
B -THREADS PER INCH UNF - 2A			24	20	20	18	16
ØD - BODY DIAMETER		MAX	.3750	.4375	5000	.6250	.7500
		MIN	.3690	.4305	.4930	.6170	.7410
F - WIDTH ACROSS FLATS		MAX	.5625	6250	.7500	.9375	1.1250
		MIN	.5510	.6120	7360	9220	1.1000
G - WIDTH ACROSS CORNERS		MAX	.6500	.7220	.8660	1 083	1 2990
		MIN	.6280	.6980	8400	1.051	1.2540
H - HEAD HEIGHT		MAX	2430	.2910	.3230	4030	.4830
		MIN	.2260	.2720	3020	.3780	.4500
1/2 H		MAX	.1300	.1550	.1720	.2140	.2560
		MIN	.1130	1360	1510	.1890	.2280
ØJ - HOLE DIAMETER		+.006 −.002	.0625	.0625	.0940	.0940	.0940
R - RADIUS		MAX	.0250	0250	0250	0450	0450
		MIN	.0150	0150	.0150	0200	.0200
MINIMUM TENSILE LOAD - LBS			13,200	17,800	24,000	38,400	56,000
L - LENGTH	TOLERANCE		DASH NO	DASH NO	DASH NO	DASH NO	DASH NO
1.500	+.000 −.125		1	2	3	4	5

USER ACTIVITIES
ARMY - ME, MI
NAVY - MC, OS

REVIEWER ACTIVITIES
ARMY - AV, EA
AIR FORCE - 82
DLA - IS
NSA - NS

APPROVED 1 AUG 84 REVISED

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

P.A. AR	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
Other Cust SH 99		SCREW, CAP, HEXAGON (FINISHED HEXAGON BOLT), HEAD DRILLED FOR LOCKING WIRE ALLOY STEEL, GRADE 8, UNF -2A	MS51478
PROCUREMENT SPECIFICATION FF-S-85	SUPERSEDES		PAGE 1 OF 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:02Z
Check the source to verify that this is the current version before use.

FED SUP CLASS
5305

USER ACTIVITIES:
ARMY-ME, MI
NAVY-MC, OS

REVIEWER ACTIVITIES
ARMY-AV, EA
AIR FORCE-82
DLA-IS
NSA-NS

REQUIREMENTS:

1. MATERIAL. ALLOY STEEL GRADE 8, IN ACCORDANCE WITH PROCUREMENT SPECIFICATION HAVING A MINIMUM ULTIMATE TENSILE STRENGTH OF 150,000 PSI.

2. FINISH. ZINC COATING IN ACCORDANCE WITH ASTM B633-78, $Fe/Zn5$ (5 μm)
3 THREADS. THE THREADS SHALL BE IN ACCORDANCE WITH FED-STD-H28/2 ACCEPTABILITY OF SCREW THREADS SHALL BE IN ACCORDANCE WITH FED-STD-H28/20, SYSTEM 21.

4. THREAD LENGTH. MINIMUM THREAD LENGTH SHALL BE TWICE THE DIAMETER PLUS .250 INCH THE TOLERANCE SHALL BE PLUS .188 INCH OR 2 1/2 THREADS, WHICHEVER IS GREATER ON SCREWS THAT ARE TOO SHORT FOR MINIMUM THREAD LENGTHS, THE DISTANCE FROM THE BEARING OF THE HEAD TO THE FIRST COMPLETE THREAD SHALL NOT EXCEED THE LENGTH OF 2 1/2 THREADS. THREADS SHALL NOT EXTEND TO THE FILLET RADIUS NOR SHALL THREADS EXTEND TO AND UNDERCUT THE HEAD OF THE SCREW.

5. HEAD MARKING. HEADS SHALL BE MARKED IN ACCORDANCE WITH MIL-HDBK-131. RAISED MARKINGS ARE PREFERRED, STAMPINGS ARE ACCEPTABLE

6. PART NUMBER THE BASIC PART NUMBER IS FOLLOWED BY A DASH NUMBER FROM TABLE I.

EXAMPLE: MS51478-1 - SCREW, CAP, HEXAGON HEAD DRILLED FOR LOCKING WIRE, ALLOY STEEL, GRADE 8, .375-24UNF-2A, LENGTH 1.500, ZINC COATED

NOTES:

1. ALL DIMENSIONS ARE IN INCHES.

2. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BIDS OR REQUEST FOR PROPOSAL, EXCEPT THAT REFERENCED ADOPTED INDUSTRY DOCUMENTS SHALL GIVE THE DATE OF THE ISSUE ADOPTED.

3. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN

APPROVED 1 AUG 84 REVISED

PA AR Other Cust SH 99	INTERNATIONAL INTEREST	TITLE SCREW,CAP,HEXAGON(FINISHED HEXAGON BOLT),HEAD DRILLED FOR LOCKING WIRE ALLOY STEEL,GRADE 8,UNF-2A	MILITARY STANDARD MS51478
PROCUREMENT SPECIFICATION FF-S-85	SUPERSEDES		PAGE 2 OF 2

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-28T18:02Z
Check the source to verify that this is the current version before use.