
FED. SUP CLASS
5305

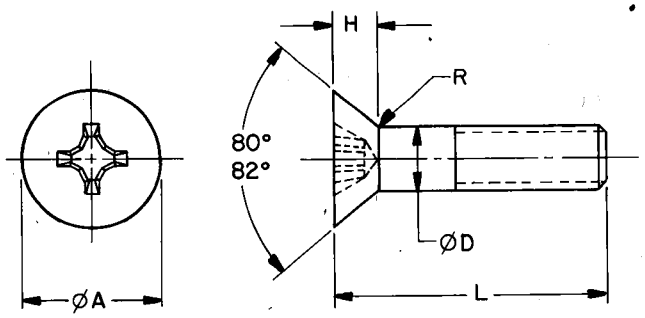

FULL HEAD

TABLE I. DIMENSIONS AND PART NUMBERS.

NOMINAL SIZE			.138	.164	.190	.250	.3125	.375
THREADS PER INCH UNC-2A			32	32	24	20	18	16
ØD - BODY DIAMETER		MAX	.1380	.1640	.1900	.2500	.3125	.3750
		MIN	.1141	.1399	.1586	.2127	.2712	.3287
ØA - HEAD DIAMETER	MAX SHARP		.2790	.3320	.3850	.5070	.6350	.7620
	ABS MIN		.2440	.2920	.3400	.4520	.5680	.6850
H - HEAD HEIGHT		REF	.0830	.1000	.1160	.1530	.1910	.2300
R - RADIUS		MAX	.055	.0660	.0760	.1000	.1250	.1500
MINIMUM TENSILE LOAD - LBS			545	8400	1,050	1,900	3,140	4,650
L - LENGTH	TOLERANCE		DASH NO	DASH NO	DASH NO	DASH NO	DASH NO	DASH NO
.250	+.000		01					
.375			02					
.500					09			
.750	-.031		03	06	10		17	
.875						12		
1.000			04	07	11	13	18	19
1.250	+.000		05			14		20
1.500	-.062			08		15		
2.750	+.000							
	-.094					16		

USER ACTIVITIES:
ARMY-ME,MI
NAVY-OS

REVIEWER ACTIVITIES:
ARMY-AV,EA,MA
AIR FORCE-82
DLA-IS
NSA-NS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

APPROVED 1 AUG 84 REVISED

P.A.	AR	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
Other Cust	SH 99		SCREW, MACHINE, 82° FLAT COUNTERSUNK HEAD, CROSS-RECESSED, CARBON STEEL, UNC-2A	MS51481
PROCUREMENT SPECIFICATION: FF-S-92		SUPERSEDES:		PAGE 1 OF 2

DD FORM 1 MAY 73 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 5305-1489

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:02Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. MATERIAL. CARBON STEEL IN ACCORDANCE WITH ASTM A29-79 GRADE 1015 (UNS G10150) THRU GRADE 1030 (UNS G10300) OR ASTM A29-79 GRADE 1116 (UNS G11160) THRU GRADE 1132 (UNS G11320). THE MINIMUM ULTIMATE TENSILE STRENGTH SHALL BE 60,000 PSI.

2. FINISH. ZINC COATING IN ACCORDANCE WITH ASTM B633-78, $Fe/Zn5$ (5 μm), TYPE II.

3. THREADS. THE THREADS SHALL BE IN ACCORDANCE WITH FED-STD-H28/2. ACCEPTABILITY OF SCREW THREADS SHALL BE IN ACCORDANCE WITH FED-STD-H28/20, SYSTEM 21.

4. THREAD LENGTH. SCREWS 2.000 INCHES LONG AND SHORTER SHALL HAVE COMPLETE THREADS EXTENDING TO WITHIN 2 THREADS OF THE HEAD, OR CLOSER IF PRACTICABLE. LONGER SCREWS SHALL HAVE A MINIMUM THREAD LENGTH OF 1.500 INCHES. THREADS SHALL NOT EXTEND TO THE FILLET RADIUS NOR SHALL THREADS EXTEND TO AND UNDERCUT THE HEAD OF THE SCREW.

5. RECESS. THE RECESS SHALL BE IN ACCORDANCE WITH MS9006.

6. PART NUMBER. THE BASIC MS PART NUMBER IS FOLLOWED BY A DASH NUMBER FROM TABLE I.

EXAMPLE: MS51481-01 - SCREW, MACHINE, 82° FLAT COUNTERSUNK HEAD, CROSS-RECESSED, CARBON STEEL, .138-32UNC-2A, LENGTH .250, ZINC COATED

NOTES:

1. ALL DIMENSIONS ARE IN INCHES.

2. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BIDS OR REQUEST FOR PROPOSAL, EXCEPT THAT REFERENCED ADOPTED INDUSTRY DOCUMENTS SHALL GIVE THE DATE OF THE ISSUE ADOPTED.

3. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

USER ACTIVITIES:
ARMY-ME, MI
NAVY-OS, MC

REVIEWER ACTIVITIES:
ARMY-AV, EA, MA
AIR FORCE-82
DLA-IS
NSA-NS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

APPROVED 1 AUG 84
REVISED

P.A.	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
AR		SCREW, MACHINE, 82° FLAT COUNTERSUNK HEAD, CROSS-RECESSED, CARBON STEEL, UNC-2A	MS51481
Other Cust SH 99			
PROCUREMENT SPECIFICATION FF-S-92	SUPERSEDES:		PAGE 2 OF 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:02Z
Check the source to verify that this is the current version before use.