MILITARY SPECIFICATION

Release, Bomb Shackle, Aero 7A, Series
and
Release, Bomb Rack Aero 7B Series

This specification has been approved by the
Bureau of Naval Weapons, Department of the Navy.

1. SCOPE

1.1 This specification covers the manufacture, inspection and testing of two types of electrically-operated release mechanisms for use with a bomb shackle and bomb racks of the type specified by the procuring activity.

1.2 Classification - The Aero 7A Series Bomb Shackle Release and Aero 7B Series Bomb Rack Release shall be of two types and shall consist of the following items:

Item	Designation	Max. Allow. Size (Inches)	Max. Allow. Wt. (Lbs.)
Release, Bomb Shackle	Aero 7A Series	4-21/32 by 1-13/16 by 3-11/32	2
Release, Bomb Rack	Aero 7B Series	4-7/32 by 1-5/8 by 2-1/2	2

2. APPLICABLE DOCUMENTS

2.1 General - The following documents of the issue in effect on the date of invitation for bids, form a part of this specification to the extent specified herein:

SPECIFICATIONS

Military

MIL-T-7743	Testing, Store Suspension Equipment, General Specification For
MIL-P-17555	Preparation For Delivery of Electronic Equipment; Miscellaneous Electrical Equipment (Except Rotating Electrical Equipment) And Associated Repair Parts
MIL-N-18307	Nomenclature and Nameplates For Aeronautical Electronic And Associated Equipment
MIL-D-70327	Drawings, Engineering And Associated Lists
SAR-300	Material Changes And Material Bulletins, Preparation of

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T13:06Z
Check the source to verify that this is the current version before use.

STANDARDS

Federal

FED-STD-No. 151	Metals, Test Methods

Military

MIL-STD-704	Electric Power, Aircraft, Characteristics And Utilization of

PUBLICATIONS

Air Force-Navy Aeronautical Bulletin

No. 143	Specifications and Standards, Use of

DRAWINGS

Bureau of Naval Weapons

Drawing Index 60A55	Aero 7A Bomb Shackle Release
Drawing Index 60A121	Aero 7A-1 Bomb Shackle Release
Drawing Index 60A56	Aero 7B Bomb Rack Release
Drawing Index 60A122	Aero 7B-1 Bomb Rack Release

2.2 Availability of Documents -

(1) When requesting specifications, standards, drawings, and publications refer to both title and number. Copies of this specification and applicable specifications required by contractors in connection with specific procurement functions may be obtained upon application to the Commanding Officer, Naval Supply Depot, Code CDS, 5801 Tabor Avenue, Philadelphia 20, Pennsylvania.

3. REQUIREMENTS

3.1 Parts and materials used in the manufacture of the Release shall conform to the applicable specifications as specified herein or as listed on the applicable drawings. Material conforming to contractors' specifications may be used provided the specifications are approved by the procuring activity, are equivalent to the Government specifications and contain requirements for adequate tests of the material. The use of contractors' specifications shall not constitute a waiver of Government inspection. All materials shall be of the lightest practical weight and entirely suitable for the intended purpose. When materials are used which are procured under commercially recognized non-Government specifications, a certificate, acceptable to the Government Inspector, showing compliance with such specifications, shall be furnished by the supplier of such material.

3.1.1 Selection of Materials - Specifications and standards of all materials and parts, and Government certification and approval of processes and equipment, which are not specifically designated herein and which are necessary for the execution of this specification, shall be selected in accordance with ANA Bulletin No. 143.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T13:06Z
Check the source to verify that this is the current version before use.

3.1.2 Weight Reduction - The contractor shall make every effort to reduce the equipment's over-all weight without impairing the function, operation or durability. All changes that are required to accomplish weight reduction shall be subject to written approval by the procuring activity prior to incorporation.

3.2 Design and Construction -

3.2.1 Conformance to Drawings - No departure from or revision to the drawings specified in 2.1 shall be permitted without prior written approval by the procuring activity, with the contractor furnishing reproducible drawings covering the change. Conformance to the drawings will not relieve the contractor of the requirements of section 4.

3.2.2 Input Power Requirements - This equipment shall perform satisfactorily under all applicable conditions specified in Specification MIL-T-7743, from a 28-volt power source with characteristics and limits as defined in Specification MIL-STD-704.

3.2.3 Interchangeability - All parts having the same manufacturer's part number shall be directly and completely interchangeable with each other with respect to installation and performance. Changes in manufacturer's part numbers shall be governed by the drawing number requirements of Specification MIL-D-70327.

3.2.4 Nomenclature and Nameplates - Nomenclature assignment and nameplate approval for equipment identification shall be in accordance with Specification MIL-N-18307.

3.2.5 Undervoltage Protection - The equipment shall not be damaged by voltages below the minimum specified herein and shall automatically resume normal operation when the voltage returns within limits.

3.2.6 Service Conditions - The Releases shall operate without failure throughout the entire environmental ranges listed below:

Thrust Force: Min. 55 pounds after 1/16 inch travel to 18 pounds minimum

Length of Stroke: Aero 7A Series 1-1/2 inches
Aero 7B Series 9/16 inch

Time of Actuating Pulse: Min. 20 milliseconds
Max. 15 seconds, 20% duty cycle

Input Power Current: 5 amperes maximum at 28 V DC

Input Power Voltage: 20 to 32 V DC

Temperature: -70° F to 160° F

Vibration: 8 to 2000 cycles/sec.

Altitude: 0 to 70,000 Ft.

Humidity: Room ambient to 90% relative humidity

Shock: 125 ± 12-1/2 gravitational units for a duration of 10 milliseconds, waveform to approximate a sinusoid.

3.3 Performance - Unless otherwise specified, values set forth to establish the requirements for satisfactory performance apply to performance under both standard and extreme service conditions. The Release and its appropriate mount shall be capable of operating, without periodic lubrication, a bomb shackle of the Mark 8 or Aero 16B type safely and successfully when tested to the conditions specified in Section 4.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T13:06Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 General - Equipments shall be subjected to the following tests to determine compliance with all the applicable requirements:

(1) Preproduction Tests - (4.2).

(2) Acceptance Tests - (4.3).

4.1.1 Test Samples - The equipments used for preproduction and sampling tests shall not be considered as equipments under the contract. They are to be supplied as equipments over and above the quantity specified for delivery in the contract.

4.1.2 Test Conditions - Unless otherwise specified all tests shall be performed at the following conditions:

(1) Room Temperature - Room ambient of 75° ±10°F

(2) Test Temperature - All parts of the Release shall be completely stabilized at the specified temperature ±5°F prior to conducting any tests.

4.2 Preproduction Tests - Preproduction tests shall be accomplished at a Government selected laboratory under the responsibility of the procuring agency. Five samples shall be selected for preproduction tests. These samples shall be the first five equipments produced using production tools. Prior to selecting these five samples for preproduction test each shall successfully pass the tests specified for individual tests. These tests shall be conducted by the contractor and results of these tests shall accompany the five samples sent to the Government selected laboratory for preproduction tests. Preproduction tests shall consist of all the tests specified in 4.4 and conducted in the sequence of Figure 2. Any defects or failures occurring during these tests shall be cause for tentative rejection of the preproduction samples. All rejected samples will be returned to the contractor for rework or correction of defects when considered practical and feasible by the procuring activity, otherwise the contractor will be required to submit additional samples for retest in lieu of the reworked samples.

4.2.1 Preproduction Approval - Approval of the preproduction samples shall be by the procuring activity upon satisfactory completion of all tests. No production equipments or lot samples shall be delivered prior to approval of the preproduction samples. Prefabrication of production equipment prior to the approval of the preproduction models is at the contractor's own risk. The approved preproduction samples will be returned to the contractor for his use in the fabrication and testing of equipment to be submitted for acceptance.

4.3 Acceptance Tests - Acceptance of equipment shall be on a lot basis. Each lot shall be composed of equipment which has successfully passed the individual tests. Acceptance tests shall consist of the following:

(1) Individual Tests

(2) Sampling Tests

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T13:06Z
Check the source to verify that this is the current version before use.

4.3.1 Individual Tests - Individual tests shall be accomplished, under the responsibility of the contractor, on each equipment submitted for acceptance under the contract. The contractor shall maintain test reports showing the quantitative results for all acceptance tests. Such reports shall be signed by an authorized representative of the contractor and this data shall be made available to the procuring activity upon request. Individual tests shall consist of the following tests:

(1) Inspection of Product (4.4.1)

(2) Reliability (4.4.2)

(3) Coil Resistance (4.4.3)

(4) Vibration (4.4.4 only)

(5) Force Provided by Plunger (4.4.5)

(6) Time of Release (4.4.6 and 4.4.6.1)

(7) Speed of Transfer Switch Operation (4.4.7)

(8) Minimum Current (4.4.8.1)

(9) Low Temperature (4.4.9)

(10) High Temperature (4.4.10)

(11) Dielectric Breakdown (4.4.11)

4.3.2 Sampling Tests - Sampling tests shall be conducted at a government laboratory under the responsibility of the procuring agency. Sampling tests shall be conducted on samples selected from lots of equipment which have successfully passed the individual tests. Samples to be tested shall be selected by the government inspector in accordance with the following lot schedule and forwarded to the government selected laboratory for testing:

Lot Sizes of Equipment Offered for Acceptance	Quantity of Samples per Lot to be Tested
75 or less	2
76 - 125	3
126 - 300	5
301 - 500	7

Sampling tests shall consist of the following tests performed in the sequence of Figure 2:

(1) Force Provided by Plunger (4.4.5)

(2) Time of Release (4.4.6 and 4.4.6.2)

(3) Speed of Transfer Switch Operation (4.4.7 and 4.4.7.2)

(4) Current (Maximum-Minimum) (4.4.8.1 and 4.4.8.2)

(5) Dielectric Breakdown (4.4.11)

(6) Temperature Rise (4.4.12)

(7) Minimum Length of Impulse (4.4.13)

(8) Service Life (4.4.14)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T13:06Z
Check the source to verify that this is the current version before use.

(9) Insulation Resistance (4.4.15)

(10) Vibration, Natural Resonant Frequency (4.4.4.1)

(11) Vibration, Destructive (4.4.4.2)

(12) Corrosion Resistant (4.4.16)

(13) Shock (4.4.17)

(14) Acceleration (4.4.18)

4.3.3 Approval of Production Lots - Approval of production lots shall be by the procuring activity upon satisfactory completion of all sampling tests. Should a failure occur during this testing, it shall be cause for rejection of that particular lot.

4.4 Test Methods -

4.4.1 Inspection of Product - Each equipment shall be examined carefully to determine that the material, and workmanship (fabrication, assembly and cleanup) requirements have been met.

4.4.2 Reliability - The Bomb Shackle Release or Bomb Rack Release, rigidly mounted as in actual use shall be operated through 50 cycles only, as specified in 4.4.14.

4.4.3 Coil Resistance - The total resistance of the coil and transfer switch circuit - without applied power; with the Release cocked, and measured from the connector terminals - shall not be less than 7.7 ohms nor more than 9.0 ohms.

4.4.4 Vibration Test - The Release shall be wired as shown in Figure 1, and with a current of 0.25 ampere passing through its magnetic unit, it shall be vibrated on an axis at right angles to the switch housing and to the plunger travel. Vibrations shall approximate a simple harmonic motion. The amplitude (total) should be 0.06 inch at the source of disturbance. The frequency shall be varied from 8 to 50 cycles per second in suitable steps over a period of approximately 30 seconds. The frequency shall be held at 50 cycles for 30 seconds after which time, and while in vibration, the Release shall be fired in the sequence shown in Figure 1. After firing, the frequency shall be reduced to the starting frequency. Inadvertent firing, failure to fire, any flickering of lamps or failure of lamps to follow the sequence of Figure 1 shall be cause for rejection of the unit.

4.4.4.1 Natural (Resonant) Frequency Vibration - The Release shall be wired as shown in Figure 1, and with a current of 0.25 ampere passing continuously through its magnetic unit, it shall be vibrated on each of its three principle axes, in turn, to determine the occurrence of the natural frequency of any of its component parts. Vibration shall follow approximately a simple harmonic motion. The frequency shall be varied from 8 to 2000 cycles per second at a constant octave sweep rate of one octave per minute starting at 8 cycles per second. The amplitude shall be 0.06 inch double amplitude or ±10g neither of which shall be exceeded at the source of disturbance. With the Release mounted in each attitude, in turn, and at each test frequency, the unit shall be tested as follows:

(1) With the plunger in the cocked position, the unit shall be vibrated until it is determined whether or not a natural frequency of any of its component parts occurs within the frequency range.

(2) The unit shall be operated electrically while not vibrating.

(3) With the plunger in the released position, the unit shall be vibrated until it is determined whether or not a natural frequency of any of its component parts occurs within the frequency range.

Premature operation of the Release, due to vibration, the flickering of any test lamp or any other mechanical or electrical malfunctioning of derangement, shall be indicative of failure of the unit.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T13:06Z
Check the source to verify that this is the current version before use.

4.4.4.2 Destructive Vibration Test - At the completion of the tests specified in 4.4.4.1 the Release shall be vibrated in each of its three principal axes in turn for a total of nine hours, 3 hours in each axis. This test shall be conducted with the Release wired as shown in Figure 1. Vibration shall follow approximately a simple harmonic motion and the frequency shall be maintained at the most critical resonance frequency for each axis and condition (cocked and uncocked) as determined in 4.4.4.1 above. The amplitude shall be 0.03 inch (total displacement of 0.06 inch) or ± 10g. If more than one critical frequency is found, the test time shall be divided among the critical frequencies; if no critical conditions are found the test shall be performed at 50 cps. If tests are run at frequencies other than 50 cps, the test duration shall be adjusted to produce the same number of cycles as the 50 cps test would produce. Operation of the Release as the result of vibration, the flickering of any lamp in the test circuit, any electrical or mechanical failure, or the mechanical loosening of any part, during the test, shall be considered as a failure of the Release to pass the test. The Release shall be operable after each three hours of vibration.

4.4.5 Force Provided by Plunger - This force is to be measured only after release of the plunger. The force provided by the plunger at the instant of release shall not be less than 55 pounds. The plunger shall exert a force of not less than 18 pounds during the full length of travel.

4.4.6 Time of Release - The Release, rigidly mounted as in actual use and operated by a 0.02 second electrical impulse of 20 volts DC as specified in 4.4.13, shall complete its plunger travel in a total time of not more than 0.03 second from the beginning of the electrical impulse.

4.4.6.1 Repeat the test of 4.4.6 four more times.

4.4.6.2 From the beginning of the electrical impulse to the completion of the plunger travel, not more than 0.03 second shall elapse under all temperature and voltage conditions as specified herein.

4.4.7 Speed of Transfer Switch Operation - With the Release rigidly mounted as in actual use and operated by a sustained electrical impulse of 20 volts D.C. the total transfer time of the switch shall not exceed 0.02 second, including coil-decay time, breaking of contacts and chatter.

4.4.7.1 Repeat 4.4.7 four more times.

4.4.7.2 Increase supply voltage to 32 V DC and repeat 4.4.7 five more times.

4.4.8 Current -

4.4.8.1 Minimum - A steady current flow of 0.25 ampere or less through the magnetic unit shall not cause any motion of the release mechanism or any part thereof.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T13:06Z
Check the source to verify that this is the current version before use.

4.4.8.2 Maximum - The current used by the magnetic unit shall not exceed 5 amperes at 28 volts at -70°F.

4.4.9 Low Temperature Test -

4.4.9.1 Time of Release at Low Temperature - After having been stabilized at a temperature of -70° F. the Release shall be fired one time under the conditions specified in 4.4.6.

4.4.9.2 Speed of Transfer Switch Operation at Low Temperature - Immediately upon completion of 4.4.9.1 the Release shall be fired one time under the conditions specified in 4.4.7.

4.4.9.3 Increase supply voltage to 32 volts D.C. and repeat 4.4.9.2 one time.

* NOTE: If the above tests are conducted at room temperature, all three tests must be completed within 1 minute.

4.4.10 High Temperature Test -

4.4.10.1 Time of Release at High Temperature - After having been stabilized at a temperature of 160° F. the Release shall be fired one time under the conditions specified in 4.4.6.

4.4.10.2 Speed of Transfer Switch Operation at High Temperature - Immediately upon completion of 4.4.10.1 the Release shall be fired one time under the conditions specified in 4.4.7.

4.4.10.3 Ambient Temperature Tests - After the Release has returned to ambient room temperature, repeat 4.4.6, 4.4.7, and 4.4.8.1.

* NOTE: After the above tests are conducted at room temperature, all three tests must be completed within one minute.

4.4.11 Dielectric Breakdown - The dielectric breakdown tests shall be conducted in accordance with Specification MIL-T-7743.

4.4.12 Temperature Rise - The temperature rise test for these release units shall be in accordance with Specification MIL-T-7743.

4.4.13 Minimum Length of Impulse - The Release shall be capable of operating on an electrical impulse of 20 volts D.C. and of 0.02 second duration during or after all temperature and test conditions as specified herein.

4.4.14 Service Life - The Bomb Shackle Release or Bomb Rack Release rigidly mounted as in actual use, shall be capable of operating without failure or readjustment of any parts, through a total of 1000 cycles. Each cycle shall consist of cocking the unit and tripping it electrically with 28 V.D.C. A 28 volt lamp shall be energized two times in succession for each firing cycle, once to fire the Release, the second time to light the lamp. Light of the lamp on the first pulse or failure to light on the second pulse shall be considered as indications of failure. This test shall be conducted so that the unit operates not more than 20% of the test time and is inoperative at least 80% of the test time in order to prevent overheating of the magnetic oil. At intervals of 250 operations the Release shall be checked for speed of transfer switch operation as specified in 4.4.7. The last 500 cycles of this test shall be conducted with the plunger striking the Release lever of a shackle jig or fixture which offers a resistance of 20 pounds at the point of contact of the plunger and Release lever. The MK 8 Shackle installations applies a 20 pound resistance to the cocked unit. The release plunger picks up the 20 pound load after moving approximately 1/16 inch. The latter phase of the test shall simulate operation with a MK 8-type shackle. This test is considered destructive and units undergoing the 1000 cycles shall not be used for any further testing.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T13:06Z
Check the source to verify that this is the current version before use.

4.4.15 Insulation Resistance - The insulation resistance test shall be conducted in accordance with Specification MIL-T-7743.

4.4.16 Corrosion Resistance - With the electrical connector plug of the Release blocked off or capped by some suitable means, the unit shall be cocked and subjected to a salt spray test as specified in Federal Test Standard No. 151 for 120 hours. After this salt spray test, the unit shall be tested as specified in 4.4.5, 4.4.13, 4.4.6.2, and 4.4.7.

4.4.17 Shock - The Release shall be subjected to two transient decelerating shock produced by securing the cocked Release, in each of its 6 rectangular positions, in turn, to the carriage of an Impact Drop Tester, similar to the type used by the Naval Air Development Center, Johnsville, Pennsylvania, and dropping the carriage through such a height that when decelerated by impact, a deceleration of 125 ± 12-1/2 gravitational units will be obtained on the unit for a period of 11 ± 1 milliseconds. The deceleration shall approximate a sine wave. The above test shall be repeated with 0.25 ampere flowing through the magnetic coil. The tripping of the push-rod during the test shall be considered an indication of failure. The unit will be operable after this test and it shall be proven that the unit will not inadvertently release under high-impact forces.

4.4.18 Acceleration - One Release (not one of the units tested in 4.4.14, 4.4.4.1, 4.4.4.2, 4.4.16, and 4.4.17) shall be cocked and mounted in such a manner as to produce a centrifugal force of 25 gravitational units normal to each of its six sides, in turn, when the unit is mounted on each of its principal axes and revolved about a point outside of the Release. After revolving for a period of one minute it shall be released electrically while still revolving when energized with an electrical impulse of 20 V DC for 0.02 second duration. Failure of the unit to release electrically, the releasing of the unit due to acceleration or any other mechanical or electrical failure shall be considered cause for rejection of the Release.

4.5 Presubmission Testing - No item part or complete equipment shall be submitted by the contractor until it has been previously tested and inspected by the contractor and found to comply, to the best of his knowledge and belief, with all applicable requirements.

4.6 Rejection and Retest - Equipment which has been rejected may be reworked or have parts replaced to correct the defects and resubmitted for acceptance. Before resubmitting, full particulars concerning previous rejection and the action taken to correct the defects found in the original shall be furnished the Government Inspector. Units rejected after retest shall not be resubmitted without the specific approval of the procuring activity.

4.7 Equipment Changes - After approval of the preproduction models, no changes which affect weight, installation interchangeability, and interchangeability of maintenance parts or assemblies shall be incorporated in the equipment unless approved by the procuring activity. To obtain procuring activity's approval, the contractor shall submit an Engineering Change Proposal(ECP) giving the necessary information concerning the change. This shall apply for either a procuring activity's recommended change or a contractor's proposed change. When required, the contractor shall also prepare a Material Change (MC) and a Material Bulletin (MB) to cover the approved change. ECP's, MC's, and MB's shall be prepared in accordance with SAR-300.

5. PREPARATION FOR DELIVERY

5.1 General - All major units and parts of the equipment shall be preserved, packaged, packed and marked for the level of shipment specified in the contract or order in accordance with Specification MIL-P-17555.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T13:06Z
Check the source to verify that this is the current version before use.

6. NOTES

6.1 Test Values - Normal and limiting values of performance data shall be determined at input voltages of 28 V DC. This data is to be used in testing the equipment at installation points for compliance with minimum acceptable standard of performance.

6.2 Performance Objectives - Minimum size and weight, simplicity of operation, ease of maintenance, and an improvement in the performance and reliability of the specific functions beyond the requirements of this specification are objectives which shall be considered in the production of this equipment. Where it appears a substantial reduction in size and weight or improvement in simplicity of design, performance, ease of maintenance or reliability will result from the use of materials, parts and processes other than those specified herein, it is desired their use be investigated. When investigation shows advantages can be realized, a request for approval shall be submitted to the procuring activity for consideration. Each request shall be accompanied by complete supporting information.

6.3 Precedence of Documents - When the requirements of the contract, this specification, or applicable subsidiary specifications are in conflict, the following precedence shall apply:

(1) Contract - The contract shall have precedence over any specification.

(2) This Specification - This specification shall have precedence over all applicable subsidiary specifications. Any deviation from this specification, or from subsidiary specifications where applicable, shall be specifically approved in writing by the procuring activity.


(3) Referenced Specifications - Any referenced specification shall have precedence over all applicable subsidiary specifications referenced therein. All referenced specifications shall apply to the extent specified.

6.4 Compliance with Drawings and Specifications - Conflict Elimination - Insofar as the contractor is required by provisions of this specification to comply strictly to the drawings listed in 2.1 which may make it impossible in some instances also to comply with the performance and test requirements specified herein, the contractor, in that event, should promptly notify the procuring activity of such fact, and appropriate changes will be made in the applicable drawings, parts or performance requirements as authorized by the procuring activity. An equitable adjustment in accordance with applicable contract provisions will be made in the price of the articles to be delivered to reflect any change so authorized by the procuring activity.

6.5 Information Required with Bids - Each bid shall be accompanied by a statement as to whether or not any exceptions are being taken to the requirements shown in the drawings and specifications. If exceptions are being taken or deviations are anticipated, alternative proposals shall be indicated in the statement.

NOTICE - When Government drawings, specification, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished or in any way supplied the said drawings, specifications or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use or sell any patented invention that may in any way be related thereto.

Source: https://assist.dla.mil Downloaded: 2026-10-19T13:06Z
Check the source to verify that this is the current version before use.

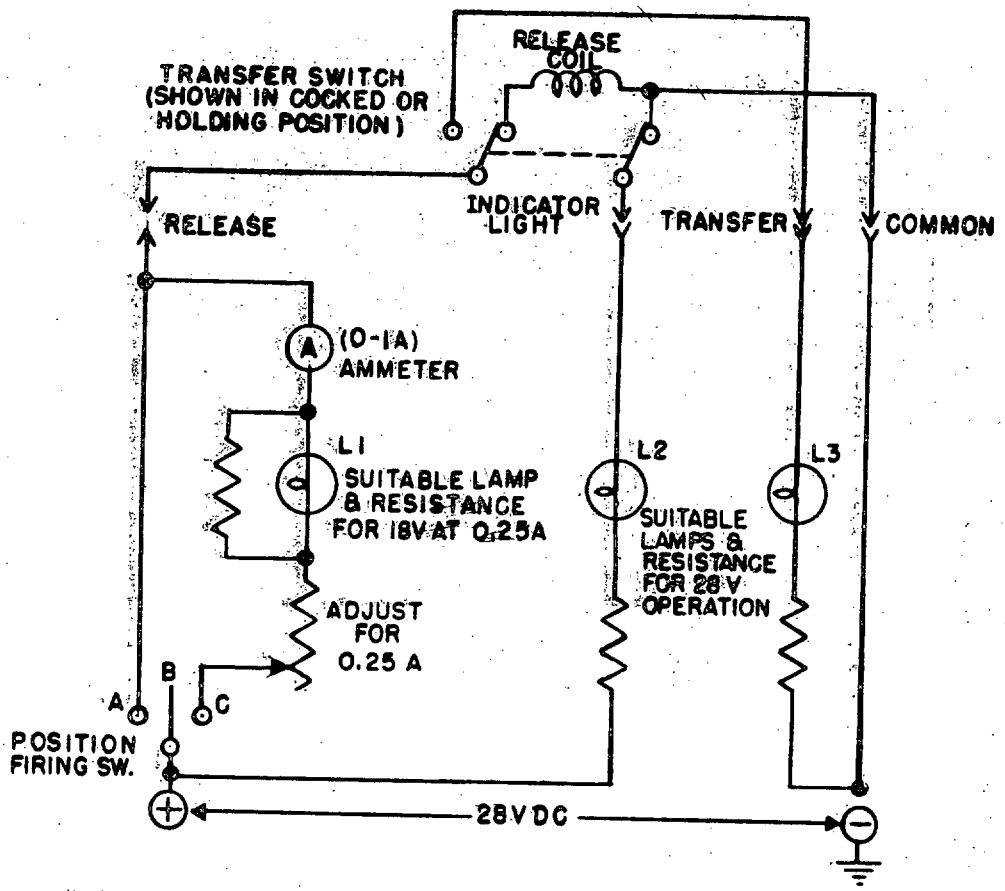

Firing switch operating sequence

During Shake Test

Position "C" - L1 & L2 on, 0.25 A. flows through coil - No movement of any parts or any parts or any lamp flicker allowed.

Firing

Position "A" - Fire Release, L1 out, L2 must stay on.

Position "B" - Transfer - L2 out.

Position "A" - Check - L3 on.

Position "B" - Off

FIGURE 1. WIRING DIAGRAM FOR VIBRATION TEST

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T13:06Z
Check the source to verify that this is the current version before use.

Tests* (Ref. Par.)	Sample No. 1	Sample No. 2	Sample No. 3	Sample No. 4	Sample No. 5	Sample No. 6	Sample No. 7
4.4.12	1	1	1	1	1	1	1
4.4.5	2	2	2	2	2	2	2
4.4.13	3	3	3	3	3	3	3
4.4.6 and 4.4.6.2	4	4	4	4	4	4	4
4.4.7	5	5	5	5	5	5	5
4.4.8.2	6	6	6	6	6	6	6
4.4.8.1	7	7	7	7	7	7	7
4.4.14	X	11	X	11	10	12	11
4.4.11	8	8	8	8	8	8	8
4.4.15	9	9	9	9	9	9	9
4.4.4.1	11	X	11	X	X	10	X
4.4.4.2	12	X	12	X	X	11	X
4.4.16	X	10	X	10	X	X	X
4.4.17	X	12	X	12	X	X	10
4.4.18	10	X	10	X	X	X	X

*NOTES

1. Digits in each column = sequence of performing tests.
2. Two samples are the minimum required for a complete testing program.
3. Test not required = X.

FIGURE 2. TESTING SEQUENCE

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T13:06Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 119-R004

INSTRUCTIONS

This sheet is to be filled out by personnel either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity *(as indicated on reverse hereof)*.

SPECIFICATION

ORGANIZATION *(Of submitter)* | CITY AND STATE

CONTRACT NO. | QUANTITY OF ITEM PROCURED | DOLLAR AMOUNT $

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES.

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO IF "YES", IN WHAT WAY?

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity)* | DATE

DD FORM 1 APR 63 1426 REPLACES NAVSHIPS FORM 4863, WHICH IS OBSOLETE PLATE NO. 15419

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T13:06Z
Check the source to verify that this is the current version before use.