MILITARY SPECIFICATION SHEET

INSTALLING AND REMOVAL TOOL, CONNECTOR ELECTRICAL CONTACTS, TYPE III, CLASS 2, COMPOSITION B.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the tool described herein shall consist of this document and the latest issue of Specification MIL-I-81969.

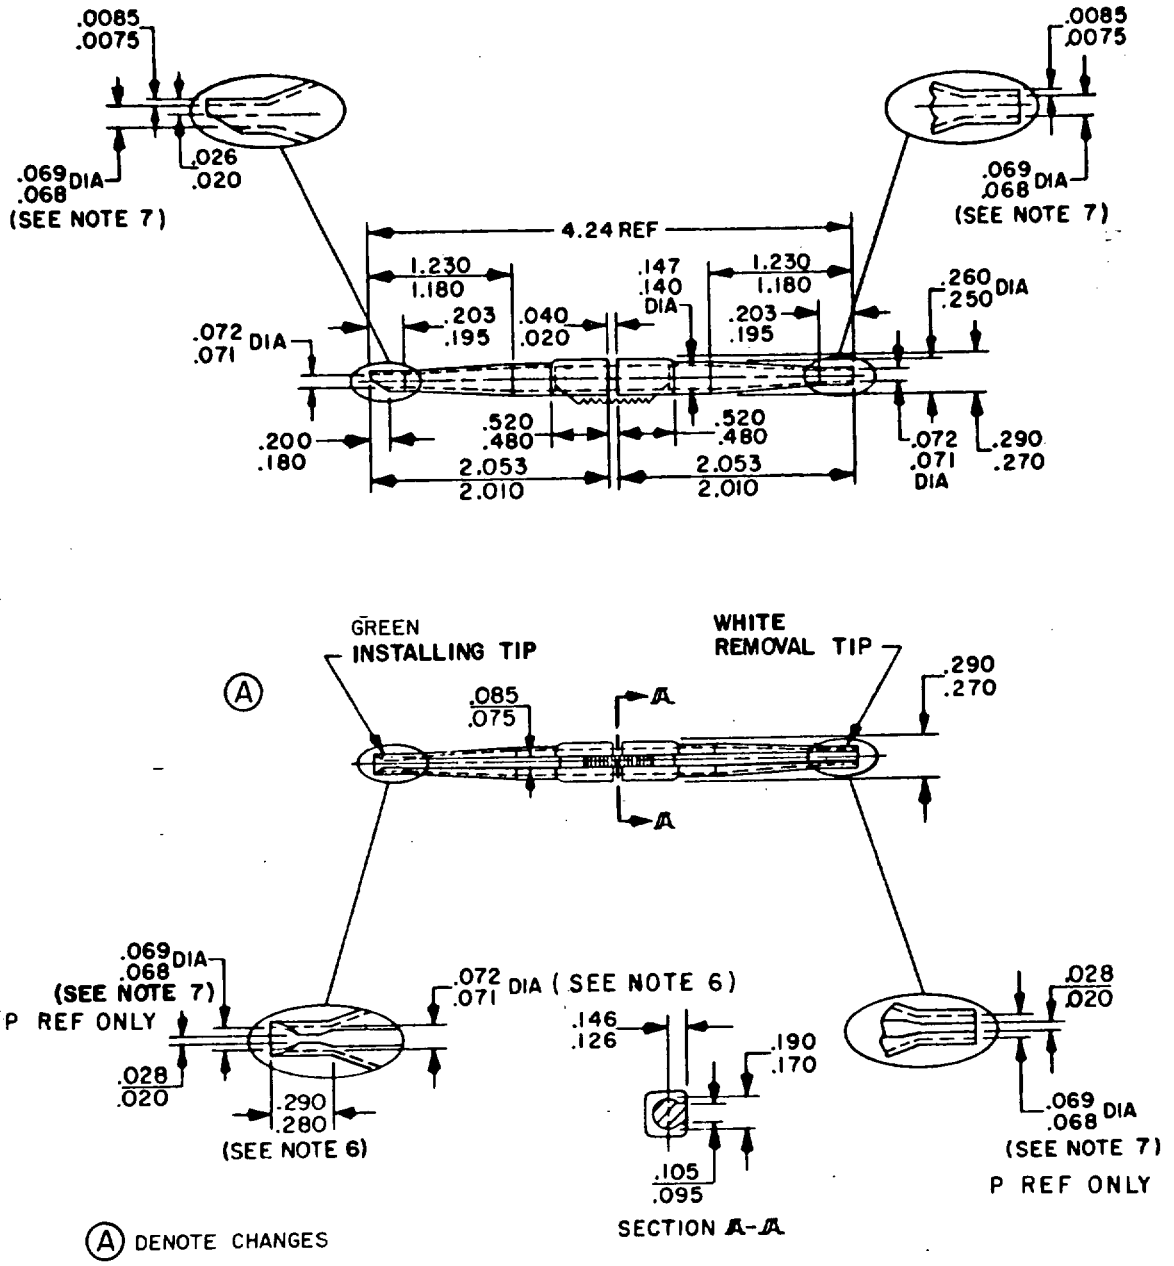


FIGURE 1. Installing and removal tool.

FSC 5120

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil - Downloaded: 2026-10-23T06:31Z
Check the source to verify that this is the current version before use.

INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
.0075	.190	.072	1.83	.170	4.32	.280	7.11
.0085	.216	.075	1.90	.180	4.57	.290	7.37
.020	.51	.085	2.16	.190	4.83	.480	12.19
.026	.66	.095	2.41	.195	4.95	.520	13.21
.028	.71	.105	2.67	.200	5.08	1.180	29.97
.040	1.02	.126	3.20	.203	5.16	1.230	31.24
.068	1.73	.140	3.56	.250	6.35	2.010	51.05
.069	1.75	.146	3.71	.260	6.60	2.053	52.15
.071	1.80	.147	3.73	.270	6.86	4.24	107.7

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Unless otherwise specified, tolerances are ±.005 inch (.13 mm) and ±2° for angles.
4. Plastic tips are capable of being separated from center section.
5. Plastic tips shall be smooth and free from burrs and sharp edges.
6. "F" inside diameter taken at a distance of .290/.280 inches (7.37/7.11 mm) from end of tip.
7. "P" inside diameter taken at end of tip.
8. Each tool shall be legibly and permanently marked on the handle in accordance with MIL-STD-130.

FIGURE 1. Installing and removal tool - Continued.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

(A) Material: Acetal homopolymer or approved equivalent.

Finish: Installing tip Green, removal tip White.

Plating: Not applicable.

Plunger force: Not applicable.

Part number: M81969/39-01

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:31Z
Check the source to verify that this is the current version before use.

Application: This tool shall be used to install and remove Size 20 contacts from connectors specified in MIL-C-24308.

Custodians:
Army - CR
Navy - AS
Air Force - 85

Review activities:
Army - MI, AR, AT, GL
Navy - EC, SH, OS
Air Force - 11, 99
DLA - ES

User activities:
Army - MO, AV, WC C
Navy - MC
Air Force - 19

Preparing activity:
Navy - AS

(Project No. 5120-B074)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:31Z
Check the source to verify that this is the current version before use.