INCH-POUND

MIL-DTL-81969/39B
28 March 2008
SUPERSEDING
MIL-I-81969/39A
28 August 1985

DETAIL SPECIFICATION SHEET

INSTALLING AND REMOVAL TOOL, CONNECTOR ELECTRICAL CONTACTS, TYPE III, CLASS 2, COMPOSITION B

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-I-81969.

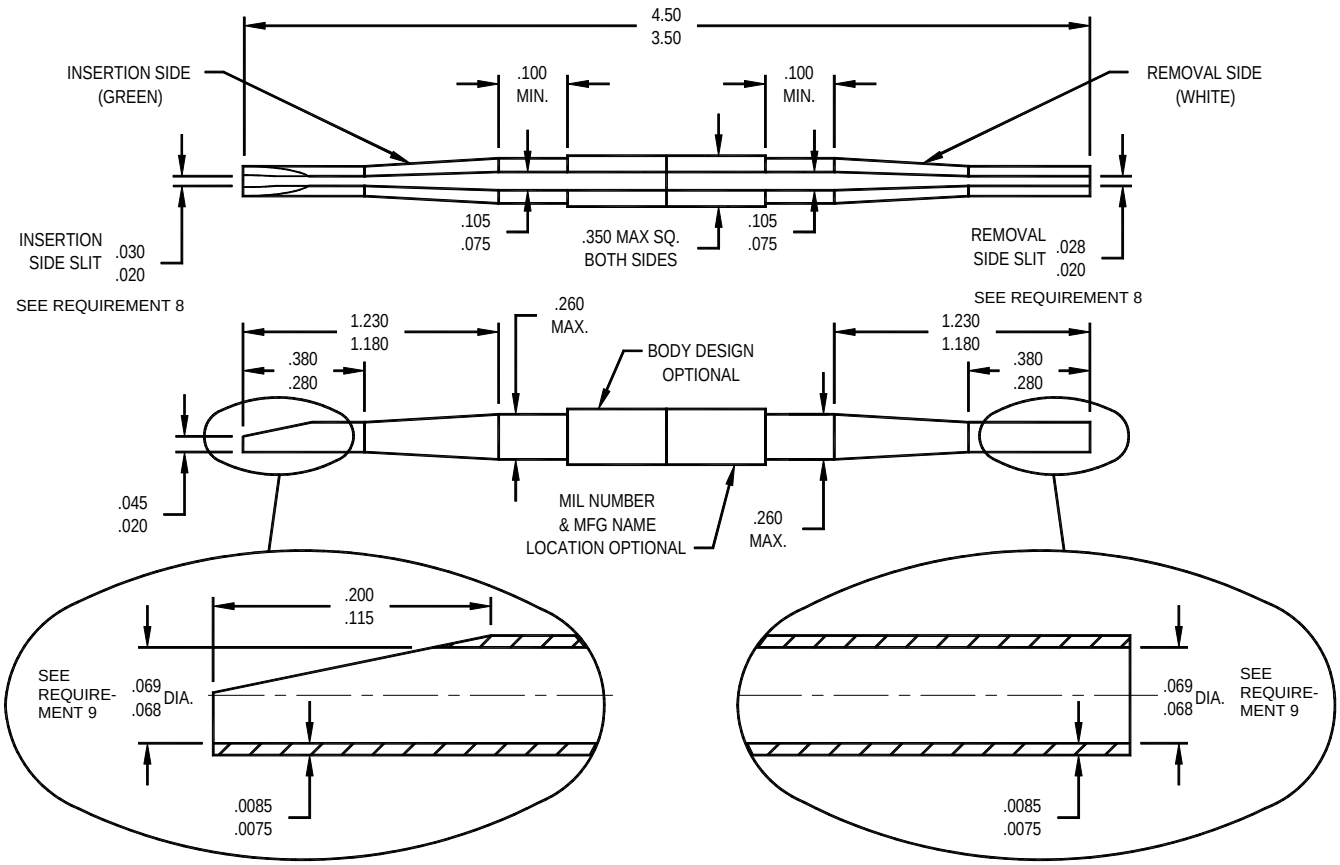


FIGURE 1. Installing and removal tool.

AMSC N/A FSC 5120

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:31Z
Check the source to verify that this is the current version before use.

TABLE I. Metric equivalents.

Inches	mm	Inches	mm	Inches	mm	Inches	mm
.0075	.190	.072	1.83	.170	4.32	.280	7.11
.0085	.216	.075	1.90	.180	4.57	.290	7.37
.020	.51	.085	2.16	.190	4.83	.480	12.19
.026	.66	.095	2.41	.195	4.95	.520	13.21
.028	.71	.105	2.67	.200	5.08	1.180	29.97
.040	1.02	.126	3.20	.203	5.16	1.230	31.24
.068	1.73	.140	3.56	.250	6.35	2.010	51.15
.069	1.75	.146	3.71	.260	6.60	2.053	52.15
.071	1.80	.147	3.73	.270	6.86	4.24	107.7

NOTES:

1. Dimensions are in inches.

2. Metric equivalents are given for general information only and based upon 1.00 inch = 25.4 mm.

3. Unless otherwise specified, tolerances are +/-.005 (.13 mm) and +/-2 degrees for angles.

4. Plastic tips are capable of being separated from center section.

5. When testing thrust, the axial load applied should be 3 lb. for the insertion side and 10 lb. for the removal side.

FIGURE 1. Installing and removal tool - continued.

REQUIREMENTS:

1. Dimensions and configuration: See figure 1.

2. Material: Acetal homopolymer or equivalent.

3. Finish: Installing tip green, removal tip white.

4. Plating: Not applicable.

5. Plunger force: Not applicable.

6. Plastic tips shall be smooth and free of burrs and sharp edges.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:31Z
Check the source to verify that this is the current version before use.

7. Each tool shall be legibly and permanently marked on the center body section.

8. Slit shall be measured with a maximum diameter (.069) gauge pin inserted in the end of tip.

9. In the free state, the removal tip shall allow entry of a minimum diameter (.068) gauge pin.

10. Part number: M81969/39-01.

11. Application: This tool shall be used to install and remove size 20 contacts from SAE-AS81659 and MIL-DTL-24308 type connectors.

Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - AS
Air Force - 11

Preparing activity:
Navy - AS

(Project 5120-2008-001)

Review activities:
Army - AR, AT, CR4, GL, MI
Navy - EC, MC OS, SH
Air Force - 19, 99
DLA - CC, GS

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:31Z
Check the source to verify that this is the current version before use.