INCH-POUND

MIL-I-0081969/30B(USAF)
10 September 1990
SUPERSEDING
MIL-I-0081969/30A(USAF)
27 May 1988
USED IN LIEU OF
MIL-I-81969/30
11 January 1979

MILITARY SPECIFICATION SHEET

INSTALLING AND REMOVAL TOOLS, CONNECTOR ELECTRICAL CONTACT, TYPE II, CLASS 2, COMPOSITION C, FOR UNWIRED CONTACTS

This military specification has been prepared by the Electronic Support Division, AFLC 2750 ABW/ES based upon currently available technical information but it has not been approved for promulgation as a coordinated revision of MIL-I-81969/30. It is subject to modification. However, pending its promulgation as a coordinated military specification, it may be used in acquisition.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-I-81969.

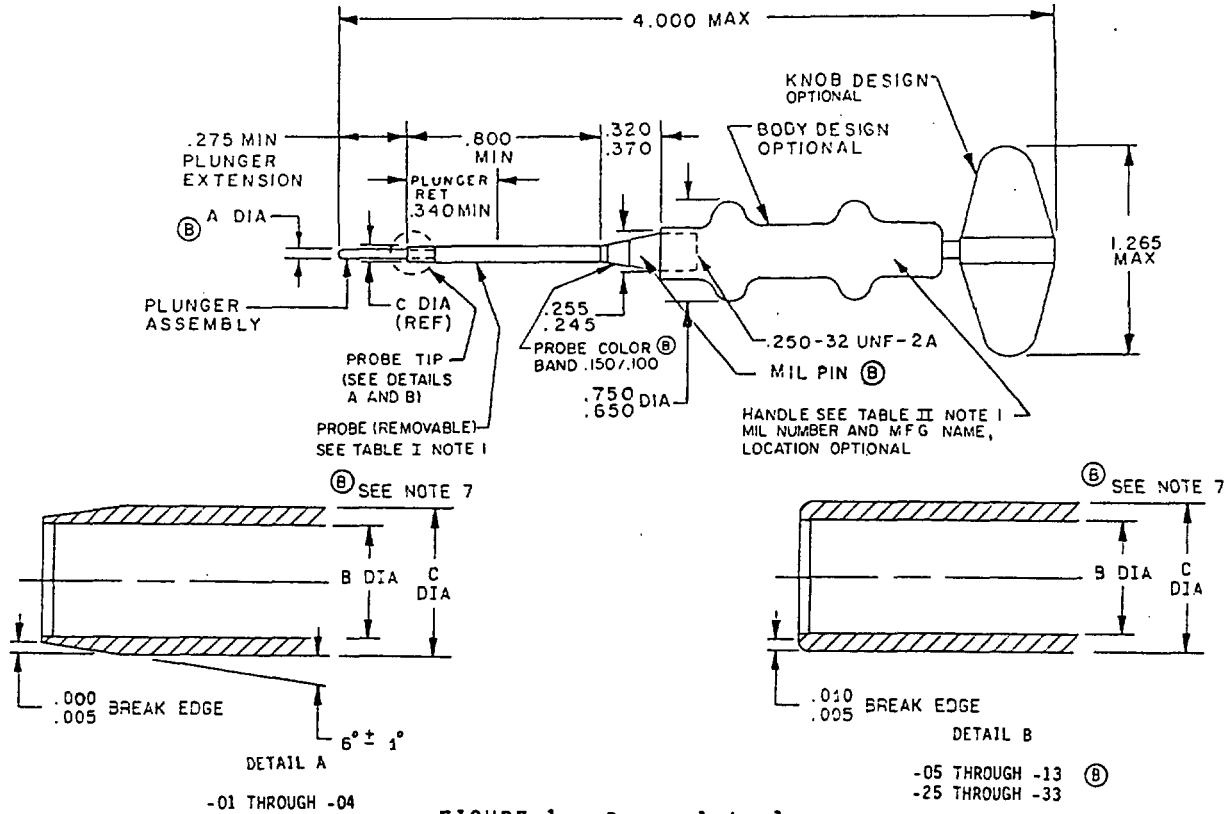


FIGURE 1. Removal tool.

Ⓑ denotes changes

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:31Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm
.005	0.12	.275	6.98
.010	0.25	.320	8.12
.100	2.54	.370	9.39
.150	3.81	.650	16.51
.245	6.22	.750	19.05
.250	6.35	.800	20.32
.255	6.47	1.265	32.13
		4.000	101.60

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ±.005 (0.13 mm) for decimals and ±.5° for angles.
4. Each tool shall be legibly and permanently marked on the handle in accordance with MIL-STD-130.
5. Metric equivalents are in parentheses.
(B) 6. Tool probe tips must be capable of being removed from handle.
7. The C dimension is to apply for .045 inch (1.14 mm) -.050 inch (1.27 mm).

FIGURE 1. Removal tool - Continued.

REQUIREMENTS:

(B) *Dimensions and configuration:* See figure 1 and tables I and II.

Material:

Body and knob: Aluminum, plastic, or approved equivalent.

Probe: Plastic or approved equivalent.

(B) Plunger: Stainless steel, class 302 or class 303, condition B, or approved equivalent.

Finish: Metal parts shall be suitably protected to resist corrosion.

(B) Part or Identifying Number (PIN): The term Part or Identifying Number (PIN) is equivalent to the term part number which was previously used in this specification sheet.

Handle: M81969/30-20.

(B) Probe: M81969/30- (and dash number from table I).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:31Z
Check the source to verify that this is the current version before use.

Ⓑ TABLE I. Tool and probe dash numbers, contact size, dimensions, superseded PIN's and applicable connectors. 1/ 2/ 3/ 4/

Tool dash number	Probe band color	Probe dash number 5/	Probe color	Contact size 6/	B dia.	C dia.	Superseded PIN	Applicable connectors
-01	Black	-21	Yellow	22	.046 (1.17) .044 (1.12)	.077 (1.96) .073 (1.85)	MS3159-22	MIL-C-81511 series 3 and 4 (except class "L")
-02	Black	-22	Red	20	.0595 (1.511) .0575 (1.400)	.099 (2.52) .095 (2.41)	MS3159-20	
-03	Black	-23	Blue	16	.091 (2.31) .089 (2.26)	.131 (3.33) .127 (3.23)	MS3159-16	
-04	Black	-24	Yellow	12	.150 (3.81) .148 (3.76)	.198 (5.03) .194 (4.93)	MS3159-12	
-05	Silver	-25	Red	20	.0755 (1.918) .0725 (1.842)	.1035 (2.629) .1005 (2.553)	MS3448-001A	MIL-C-83733 (except size 22D) MIL-C-5015 series MS3450 MIL-C-83723 series 3 MIL-C-26482 series 2 MIL-C-81511 (class "L" only)
-06	Silver	-26	Blue	16	.1010 (2.565) .0985 (2.502)	.1345 (3.416) .1315 (3.340)	MS3448-001B	
-07	Silver	-27	Yellow	12	.1480 (3.759) .1465 (3.721)	.1925 (4.890) .1895 (4.813)	MS3448-001C	
-08	Brown	-28	Brown	22D	.046 (1.17) .044 (1.12)	.0645 (1.638) .0625 (1.588)		MIL-C-38999 series 1-4 MIL-C-24308 MIL-C-55302/68, MIL-C-55302/71, MIL-C-55302/75 MIL-C-83733 (size 22D only)
-09	Brown	-29	Yellow	22M	.044 (1.12) .042 (1.07)	.0645 (1.638) .0625 (1.588)		
-10	Brown	-30	Green	22	.050 (1.27) .048 (1.22)	.074 (1.88) .072 (1.83)		
-11	Brown	-31	Red	20	.068 (1.73) .066 (1.68)	.097 (2.46) .095 (2.41)		
-12	Brown	-32	Blue	16	.101 (2.57) .099 (2.51)	.133 (3.38) .131 (3.33)		
-13	Brown	-33	Yellow	12	.148 (3.76) .146 (3.71)	.187 (4.75) .185 (4.70)		

1/ Probe shall be removable and may be ordered separately.
2/ Handle and all probes, PIN M81969/30-19, may be ordered in a complete set.
3/ Handle may be ordered separately as PIN M81969/30-20. (Handle includes plunger assembly, knob, and body.)
4/ Handle (-20) and probes (-21 through -24) PIN M81969/30-34 may be ordered in a complete set.
Handle (-20) and probes (-25 through -27) PIN M81969/30-35 may be ordered in a complete set.
Handle (-20) and probes (-28 through -33) PIN M81969/30-36 may be ordered in a complete set.
5/ Tool probe only. M81969/30-XX.
6/ For multiple size contacts (e.g. 16 through 20 or 12 through 16) the tool shall be chosen based on the mating size of the contact.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:31Z
Check the source to verify that this is the current version before use.

TABLE II. Handle dash number, contact size, and dimensions.

Handle dash number M81969/30-	Contact size	Handle color 1/ code	A diameter	Superseded PIN
20	12 through 22M	Gold	.042 (1.07) .040 (1.02)	---

1/ Color coding shall be done with total coloring of the handle or the use of a color band.

NOTE: This specification covers removable probe tips and the applicable handle, tool assemblies (attached probe tips), which may be acquired under MIL-I-81969/30 and are acceptable for use in the USAF system.

Supersession data: In addition to MIL-I-81969/30, the following documents are also superseded by this specification:

MS3448(NAVY), dated 1 April 1971.
MS3159, dated 20 June 1979.

CONCLUDING MATERIAL

Custodian:
Air Force - 85

Review activities:
Air Force - 11, 17, 99
DLA - ES

User activity:
Air Force - 19

Preparing activity:
Air Force - 85

Agent:
DLA - ES

(Project 5120-FC88)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:31Z
Check the source to verify that this is the current version before use.