MILITARY SPECIFICATION SHEET

INSTALLING AND REMOVAL TOOLS, CONNECTOR ELECTRICAL CONTACT, TYPES I AND II, CLASS 2, COMPOSITION B

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the tools described herein shall consist of this document and the latest issue of Specification MIL-I-81969.

Ⓐ

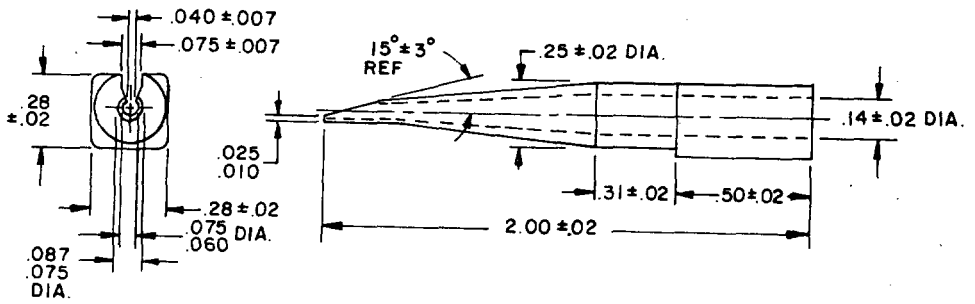


FIGURE 1. Installing tool.

Ⓐ

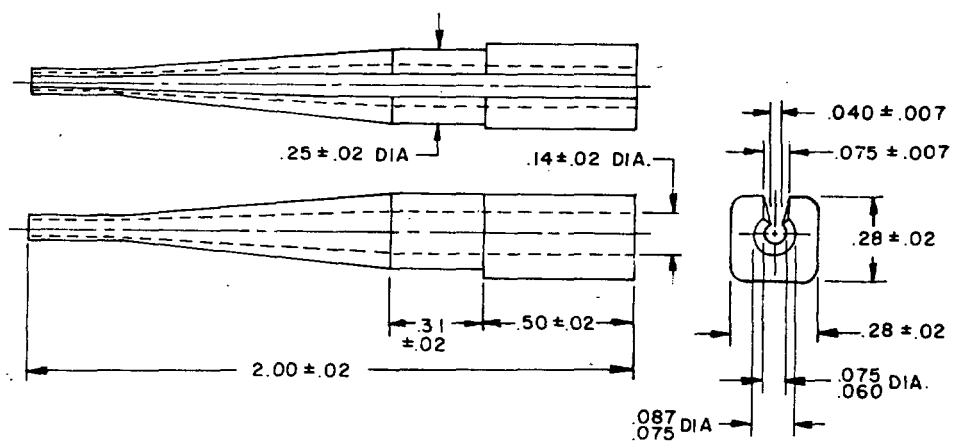


FIGURE 2. Removal tool.

Ⓐ Denotes changes.

1/ For complete supersession data, see page 3 of this specification.

FSC 5120

☆U.S. GOVERNMENT PRINTING OFFICE: 1981—703-023/6679

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:30Z
Check the source to verify that this is the current version before use.

INCHES	MM	INCHES	MM	INCHES	MM
.007	.18	.060	1.52	.28	7.1
.010	.25	.075	1.90	.31	7.9
.02	.5	.087	2.21	.50	12.7
.025	.64	.14	3.6	2.00	50.8
.040	1.02	.25	6.4		

Ⓐ NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Unless otherwise specified, tolerance is ±.015 inch (.38 mm).
4. To install contact, place installing tool around wire and against shoulder before installing contact. A "clicking" sound, followed by increased resistance to further forward motion, indicates a fully installed contact. Check for contact retention by exerting a light pull (approximately 1 pound) on the wire.
5. To remove contact, insert removal tool straight into the contact cavity until bottomed to release contact. Use rod .040 to .041 inch (1.02 to 1.04 mm), either round ended or flat ended with no sharp edges to push contact and tool out rear of receptacle insert.
6. Each tool shall be legibly and permanently marked on the handle in accordance with MIL-STD-130.

FIGURE 3. Metrics and notes for figures 1 and 2.

Ⓐ REQUIREMENTS:

Dimensions and configuration: See figures 1, 2, and 3.

Material: Acetal homopolymer resin per MIL-P-46137 or polyamide composition A, type I per MIL-M-20693.

Plating: Not applicable.

Plunger force: Not applicable.

Tool color:
Installing tool: Green.
Removal tool: White.

Part number:
M81969/10-01, Installing tool.
M81969/10-02, Removal tool.

Application: These tools shall be used to install and remove contacts specified in MIL-C-55302/82(USAF).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:30Z
Check the source to verify that this is the current version before use.

Supersession data: In addition to MIL-I-81969/10, the following document is also superseded by this specification.

a. MIL-C-55302/86(USAF), dated 25 October 1973.

Custodians:
Army - CR
Navy - AS
Air Force - 85

Review activities:
Army - MI, AR, AT, GL
Navy - EC, SH, OS
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - ME, AV
Navy - MC, YD
Air Force - 19

Preparing activity:
Navy - AS

Agent:
DLA - ES

(Project 5120-0889-10)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:30Z
Check the source to verify that this is the current version before use.