
MILITARY SPECIFICATION SHEET

INSTALLING AND REMOVAL TOOLS, CONNECTOR ELECTRICAL CONTACT, TYPE II, CLASS 2, COMPOSITION A

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the tools described herein shall consist of this document and the latest issue of Specification MIL-I-81969.

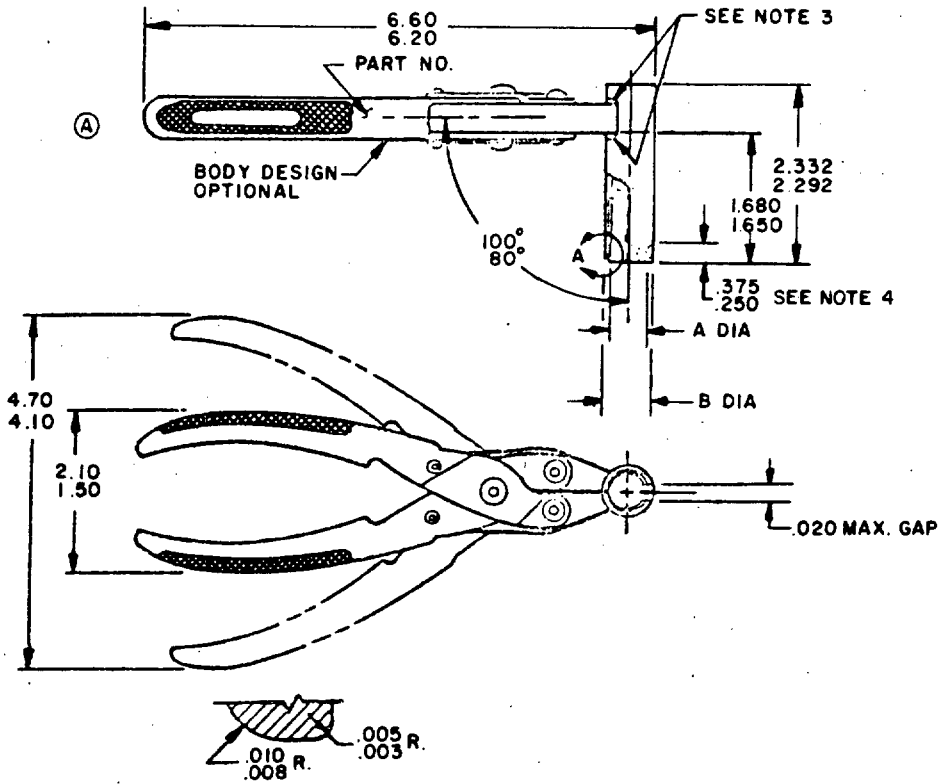

DETAIL A

INCHES	MM	INCHES	MM	INCHES	MM
.003	.08	.375	9.52	2.332	59.23
.005	.13	1.50	38.1	4.10	104.1
.008	.20	1.650	41.91	4.70	119.4
.010	.25	1.680	42.67	6.20	157.5
.020	.51	2.10	53.3	6.60	167.6
.250	6.35	2.292	58.22		

FIGURE 1. Removal tool.

Ⓐ Denotes changes.

1/ For complete supersession data, see page 3 of this specification.

FSC 5120

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:30Z
Check the source to verify that this is the current version before use.

Ⓐ NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Bead of weld or braze not to exceed .100 inch (2.54 mm) in width of bottom joint.
4. Both extractor tips (inside and outside diameter) to be coated to dimension shown with stratified polytetrafluoroethylene .00075/.00055 inch (.0190/.0134 mm) thick or equivalent.
5. With tips closed around "C" diameter pin, tips shall enter a ring gage of "D" diameter.
6. Each tool shall be legibly and permanently marked on the handle in accordance with MIL-STD-130.
7. Metric equivalents are in parentheses.

FIGURE 1. Removal tool - Continued.

Ⓐ TABLE I. Dash numbers, contact size, dimensions, and superseded part number.

Dash number	Contact size	A Dia	B Dia	C Dia See note 5	D Dia See note 5	Superseded part number
-01	8	.282 (7.16) .276 (7.01)	.316 (8.03) .310 (7.87)	.275 (6.98) .274 (6.96)	.318 (8.08) .317 (8.05)	MS3483-1
-02	4	.398(10.11) .392 (9.96)	.440(11.18) .434(11.02)	.391 (9.93) .390 (9.91)	.442(11.23) .441(11.20)	MS3483-2
-03	0	.591(15.01) .585(14.86)	.628(15.95) .622(15.80)	.584(14.83) .583(14.81)	.630(16.00) .629(15.98)	MS3483-3

Ⓐ REQUIREMENTS:

Dimensions and configuration: See figure 1 and table I.

Material: Stainless steel.

Plating: None.

Plunger force: Not applicable.

Part number: M81969/15-(and dash number from table I).

Application: These tools shall be used to remove contacts from rear release connectors specified in MIL-C-5015.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:30Z
Check the source to verify that this is the current version before use.

Ⓐ REQUIREMENTS - Continued.

Supersession data: In addition to MIL-I-81969/15, the following document is also superseded by this specification.
a. MS3483(NAVY), dated 5 April 1974.

Custodians:
Army - CR
Navy - AS
Air Force - 85

Review activities:
Army - MI, AR, AT, GL
Navy - EC, SH, OS
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - , ME, AV,
Navy - MC, YD
Air Force - 19

Preparing activity:
Navy - AS

Agent:
DLA - ES

(Project 5120 0889-15)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:30Z
Check the source to verify that this is the current version before use.