MILITARY SPECIFICATION SHEET

INSTALLING AND REMOVAL TOOLS, CONNECTOR ELECTRICAL CONTACT, TYPE I, CLASS 1, COMPOSITION C

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the tools described herein shall consist of this document and the latest issue of specification MIL-I-81969.

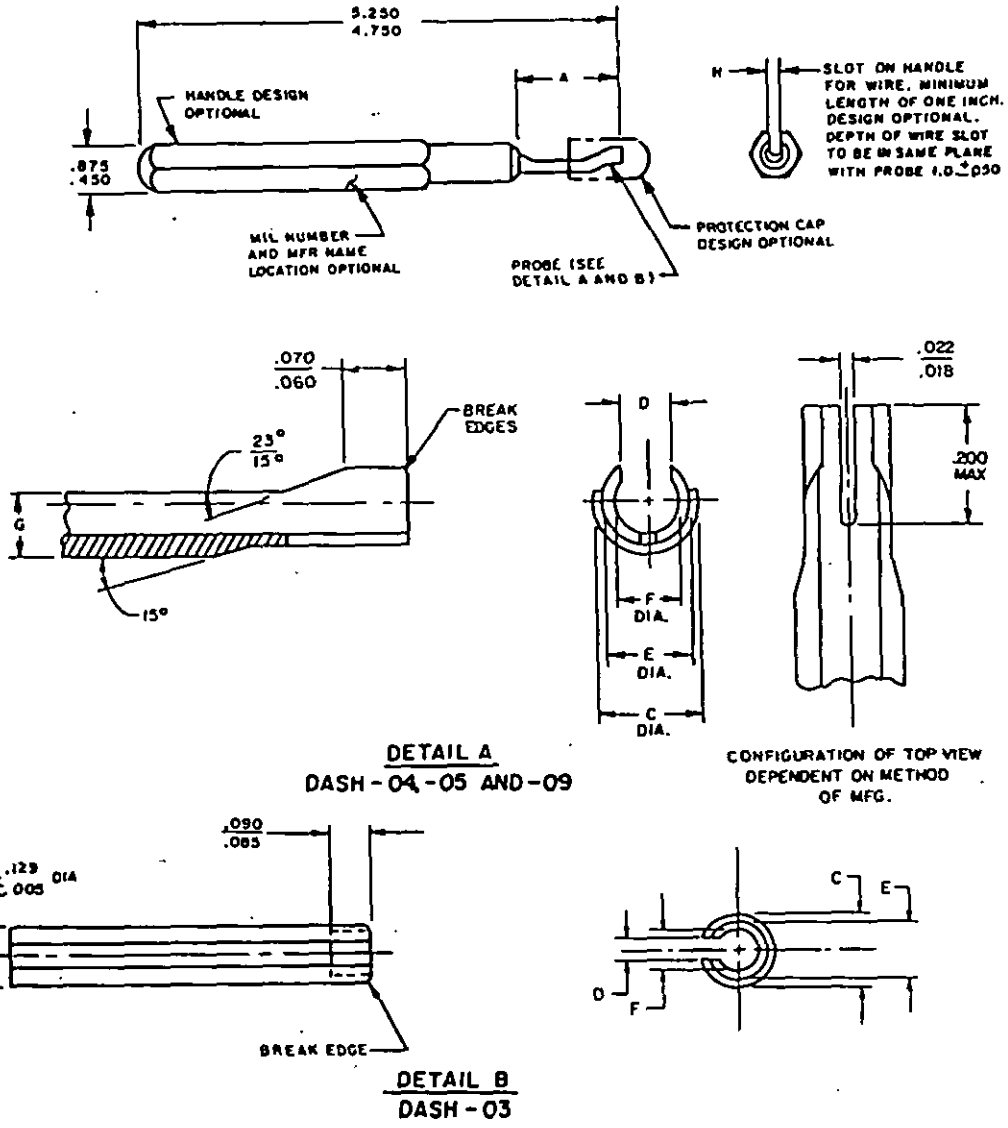


FIGURE 1. Installing tool, dash -03, -04, -05 and -09.

AMSC N/A FSC 5120

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:30Z
Check the source to verify that this is the current version before use.

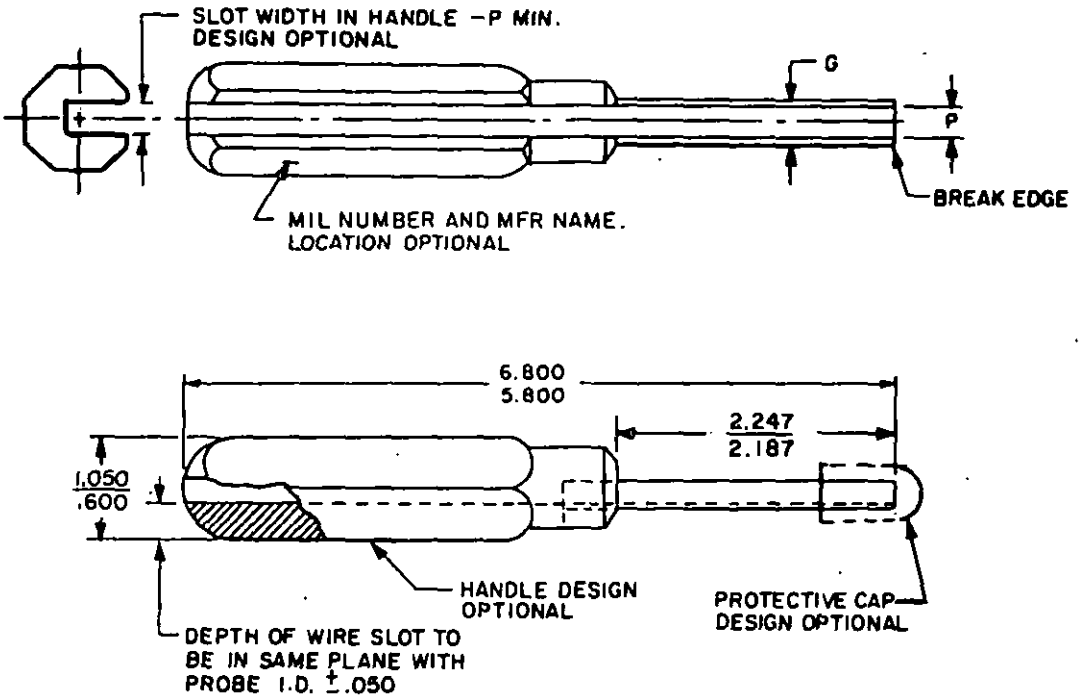


FIGURE 2. Installing tool, dash -06, -07 and -08.

TABLE I. Dash numbers, characteristics and dimensions.

Dash Number	Contact Size	Handle Color	A Min	C Dia	D	E	F	G Dia	H Min	P Dia	Supersedes
03	20	Red	.930	.134 .130	.093 .085	.109 .107	.093 .085	.094 .083	.093	--	MS24256A20
04	16	Blue	2.127	.169 .159	.090 .080	.133 .128	.101 .098	.090 .080	.130	--	MS24256A16 M81969/17-01 MS90455-16
05	12	Yellow	2.127	.209 .189	.121 .118	.179 .177	.147 .144	.110 .100	.173	--	MS24256A12 M81969/17-02 MS90455-12
06	8	Red	--	--	--	--	--	.308 .305	--	.263 .255	MS90455-8
07	4	Blue	--	--	--	--	--	.414 .411	--	.378 .370	MS90455-4
08	0	Yellow	--	--	--	--	--	.606 .603	--	.558 .550	MS90455-0
09	20	Red	1.00	.134 .124	.070 .068	.106 .104	.085 .083	.063 .053	.093	--	MS24256B20

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:30Z
Check the source to verify that this is the current version before use.

INCHES	mm	INCHES	mm	INCHES	mm	INCHES	mm
.01	.254	.100	2.54	.147	3.73	.414	10.52
.005	0.13	.101	2.57	.159	4.04	.450	11.43
.018	0.46	.104	2.64	.169	4.29	.550	13.97
.022	0.56	.106	2.69	.173	4.39	.558	14.17
.050	1.27	.107	2.72	.177	4.50	.603	15.32
.053	1.35	.109	2.77	.179	4.55	.606	15.39
.060	1.52	.110	2.79	.189	4.80	.875	22.23
.063	1.60	.118	3.00	.200	5.08	.930	23.62
.068	1.73	.121	3.07	.209	5.31	1.000	25.40
.070	1.78	.124	3.15	.255	6.48	2.127	54.03
.080	2.03	.128	3.25	.263	6.68	2.187	55.55
.083	2.11	.129	3.28	.305	7.75	2.247	57.07
.085	2.16	.130	3.30	.308	7.82	4.750	120.65
.090	2.29	.133	3.38	.370	9.40	5.250	133.35
.093	2.36	.134	3.40	.378	9.60	5.800	147.32
.094	2.39	.144	3.66	.411	10.44	6.800	172.72
.098	2.49						

REQUIREMENTS:

1. Materials:

   a. Handles: Aluminum alloy, plastic per MIL-M-14, L-P-1133, or approved equivalent.

   b. Probes: Metals treated to resist corrosion.

2. Plating: Plating as required.

3. Plunger force: Not applicable.

4. Application: These tools shall be used to install contacts of connectors as follows:

Dash No.	
-03	MIL-C-26482 Series 1 crimp, MIL-C-26500, MIL-C-26518, MIL-C-81703 Series II.
-04, -05, -09	MIL-C-26482, Series 1 crimp; MIL-C-26500, MIL-C-81703, Series 2; MIL-C-5015, MS3400 - MS3412 Series, MIL-C-38300, MIL-C-81582, MIL-C-26518, MIL-C-28748/9 and /10.
-06 thru -08	MIL-C-26518, MIL-C-5015, MS3400 - MS3412 Series, MIL-C-26500.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:30Z
Check the source to verify that this is the current version before use.

Supersession data: In addition to MIL-I-81969/17A, the following documents are also superseded by this specification:

a. MS24256L(USAF), dated 19 May 1976.
b. MS90455C(NAVY), dated 1 August 1975.
c. MIL-I-81969/17, dated 2 August 1976.

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.000 inch = 25.40 mm.
3. Each tool shall be furnished with a protective cap - design optional.
4. Unless otherwise specified, tolerance is ±.005 mm) on three place decimals, ±.01 on two place decimals and ±4° on angles.
5. Slot design shall allow all applicable wire sizes to fit into the tool freely.
6. Each tool shall be legibly and permanently marked along the handle in accordance with MIL-STD-130.
7. Probe penetration into connector - Probe dimensions are applicable for this length.

Revision letters are not used to denote changes due to the extensiveness of the changes.

Custodians:
Army - CR
Navy - AS
Air Force - 85

Review activities:
Army - MI, AR, AT, GL
Navy - EC, SH, OS
Air Force - 11, 99
DLA - ES

User activities:
Army - ME, AV
Navy - MC, YD
Air Force - 19

Preparing activity:
Navy - AS
(Project No. 5120-B095-5)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:30Z
Check the source to verify that this is the current version before use.