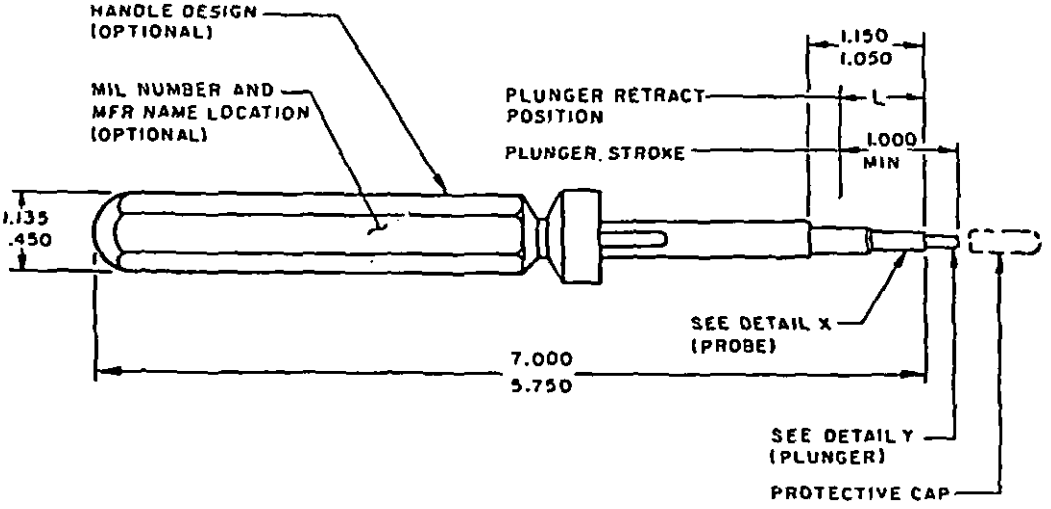
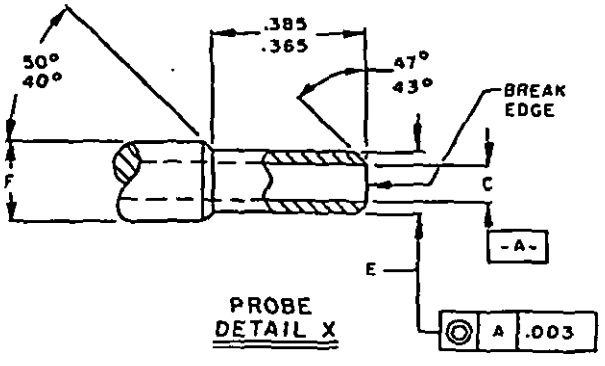
MILITARY SPECIFICATION SHEET

INSTALLING AND REMOVAL TOOLS, CONNECTOR ELECTRICAL CONTACT TYPE II, CLASS 1, COMPOSITION C

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-I-81969.





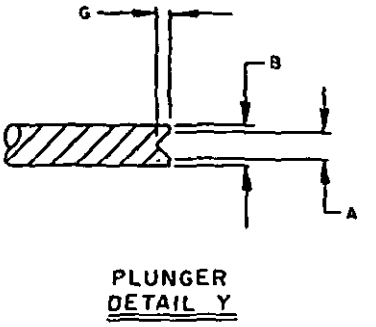


FIGURE 1. Removal tool, dash -01 thru -06.

1/ For complete supersession data, see page 5 of this specification sheet.

AMSC N/A FSC 5120

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:30Z
Check the source to verify that this is the current version before use.

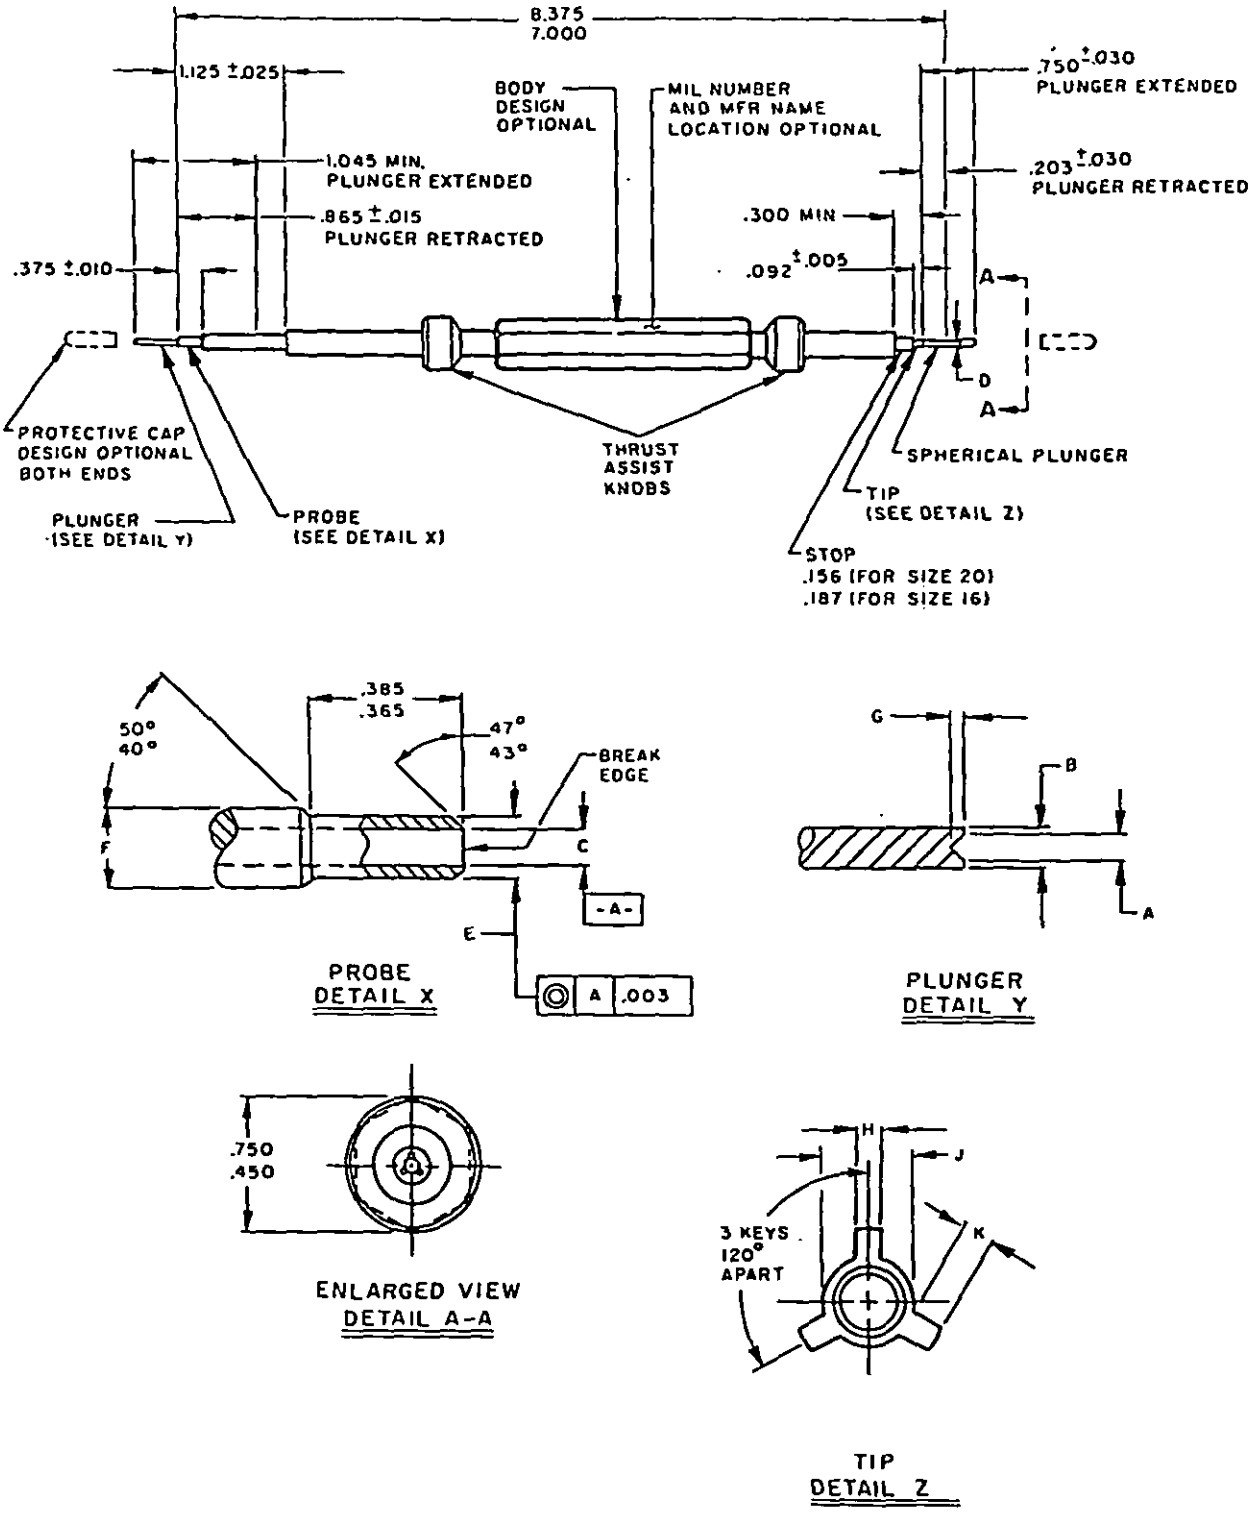


FIGURE 2. Removal tools, dash -10 and -11.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:30Z
Check the source to verify that this is the current version before use.

TABLE I. Dash numbers, contact size, dimensions, superseded part numbers.

Dash Number	Contact Size	Handle Color	A Dia	B Dia	C Dia	E Dia	F Dia	G	L	Superseded Part Number
-01	16	Blue	.060	.107	.116	.138	.144	.027	.880	M81969/19-08
			.050	.103	.114	.136	.140	.017	.850	MS90456-16
-02	12	Yellow	.091	.155	.164	.185	.192	.035	.955	M81969/-19-09
			.081	.151	.162	.183	.188	.025	.925	MS90456-12
-03	8	Red	.139	.247	.255	.282	.325	.051	1.000	MS90456-8
			.129	.243	.253	.280	.321	.041	.900	
-04	4	Blue	.220	.330	.339	.360	.404	.076	.990	MS90456-4
			.210	.326	.337	.358	.400	.066	.850	
-05	0	Yellow	.352	.512	.521	.542	.584	.113	.990	MS90456-0
			.342	.508	.519	.540	.580	.103	.850	
-06	20	Red	.040	.072	.081	.099	.107	.021	.880	M81969/19-07
			.030	.068	.079	.097	.103	.011	.850	MS90456-20

TABLE II. Dash numbers, contact size, dimensions and superseded part numbers.

Dash Number	Contact Size	Handle Color	A Dia	B Dia	C Dia	D Dia	E Dia	F Dia	G	H	J Dia	K	Superseded Part Number
-10	20	Red	.040	.072	.081	.085	.099	.107	.021	.016	.048	.034	MS24256RH20
			.030	.068	.079	.083	.097	.103	.011	.014	.046	.032	
-11	16	Blue	.060	.107	.116	.120	.138	.144	.027	.026	.080	.034	MS24256RH16
			.050	.103	.114	.118	.136	.140	.017	.024	.078	.032	

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:30Z
Check the source to verify that this is the current version before use.

INCH	mm	INCH	mm	INCH	mm	INCH	mm
.003	0.08	.079	2.01	.210	5.33	.519	13.18
.005	0.13	.080	2.03	.220	5.59	.521	13.23
.011	0.27	.081	2.06	.243	6.17	.523	13.28
.014	0.36	.091	2.31	.247		.525	13.34
.015	0.38	.092	2.34	.253	6.43	.540	13.71
.016	0.41	.097	2.46	.255	6.48	.542	13.76
.017	0.43	.099	2.51	.280	7.11	.580	14.73
.021	0.53	.103	2.62	.282	7.16	.584	14.83
.024	0.61	.107	2.71	.300	7.62	.750	19.05
.025	0.64	.114	2.90	.320	8.12	.850	21.59
.026	0.66	.116	2.95	.321	8.15	.865	21.97
.027	0.68	.129	3.28	.325	8.25	.880	22.35
.030	0.76	.136	3.45	.326	8.28	.900	22.86
.032	0.81	.138	3.50	.330	8.38	.925	23.49
.034	0.86	.139	3.53	.337	8.56	.950	24.13
.035	0.89	.140	3.55	.339	8.61	.955	24.25
.040	1.02	.144	3.65	.342	8.69	.980	25.14
.046	1.17	.151	3.83	.352	8.94	1.000	25.40
.048	1.22	.155	3.92	.358	9.09	1.045	26.54
.050	1.27	.162	4.11	.360	9.14	1.100	27.84
.051	1.30	.164	4.17	.365	9.27	1.125	28.58
.060	1.52	.183	4.64	.385	9.78	1.135	28.83
.066	1.68	.185	4.69	.400	10.16	1.150	29.21
.068	1.72	.187	4.74	.404	10.26	5.750	146.05
.072	1.82	.188	4.77	.508	12.90	7.000	177.80
.076	1.93	.192	4.87	.512	13.00	8.375	212.72
.078	1.98	.203	5.16				

REQUIREMENTS:

1. Dimensions and configurations:

   Dash -01 thru -06, see Figure 1 and Table I.
   Dash -10 and -11, see Figure 2 and Table II.

2. Material:

   Handle: Dash -01 thru -06, aluminum or plastic per MIL-M-14, L-P-1183. Dash -10 and -11, plastic per MIL-M-14, L-P-1183, or approved equivalent.

   Plunger, Probe and Keys: Metal treated to resist corrosion.

3. Finish: All metal parts to be corrosion resistant and free from nicks and burrs.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:30Z
Check the source to verify that this is the current version before use.

4. Plunger force: Dash -01 thru -06: 1.5 ± 1 pound.
Dash -10 thru -11: 1.5 ± 1 pound.

5. Part number: M81969/19- (and dash numbers from Tables I and II).

6. Application: These tools shall be used to remove contacts from connectors as follows:

Dash -01 thru -06, MIL-C-5015, (MS3400-MS3412), MIL-C-26482, Series 1 crimp; MIL-C-26500, MIL-C-26518, and MIL-C-81703, Series 2.

Dash -10 and -11, MIL-C-38300.

7. Supersession data: In addition to MIL-I-81969/19A, the following documents are also superseded by this specification:

a. MS24256L(USAF), dated 19 May 1976.
b. MS90456C(NAVY), dated 1 August 1975.
c. MIL-I-81969/19, dated 2 August 1976.

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.000 inch = 25.40 mm.
3. Unless otherwise specified, tolerances are ±.005 inch for decimals and ±1° for angles.
4. Each tool shall be furnished with a protective cap (design optional), for dash numbers -01 thru -11.
5. Tool keys rotate radially for dash -10 and -11.
6. Each tool shall be legibly and permanently marked along the handle in accordance with MIL-STD-130.
7. Metric equivalents are in parenthesis.

Revision letters are not used to denote changes due to the extensiveness of the changes.

Custodians:
Army - CR
Navy - AS
Air Force - 85

Review activities:
Army - MI, AR, AT, GL
Navy - EC, SH, OS
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - ME, AV
Navy - MC, YD
Air Force - 19

Preparing activity:
Navy - AS

(Project No. 5120-B095-7)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:30Z
Check the source to verify that this is the current version before use.