
MILITARY SPECIFICATION SHEET

INSTALLING AND REMOVAL TOOLS, CONNECTOR ELECTRICAL CONTACTS, INTERFACIAL SEAL, TYPE III, CLASS 1, COMPOSITION A.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the tool described herein shall consist of this document and the latest issue of specification MIL-I-81969.

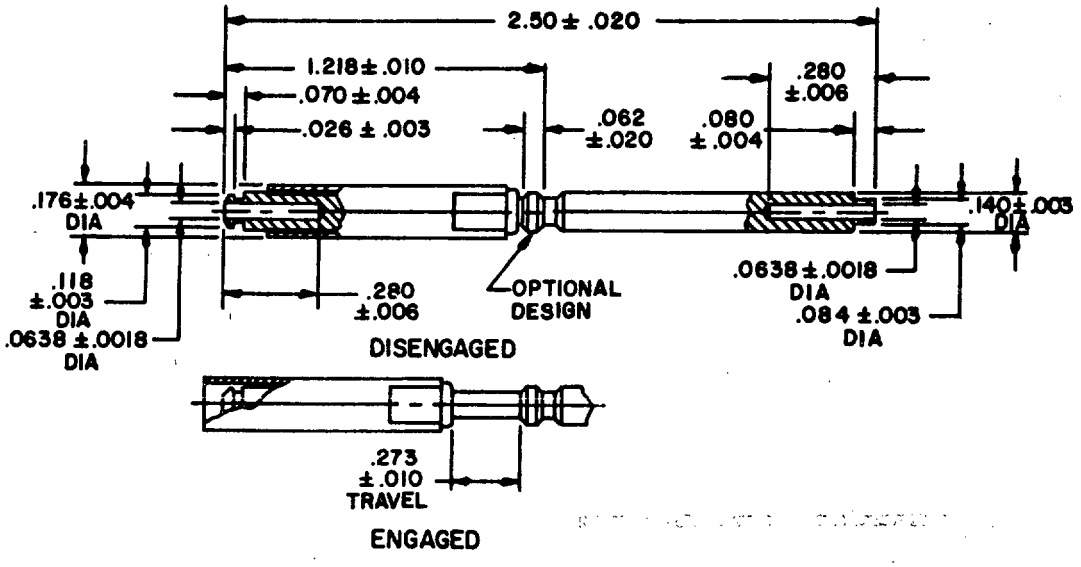


| INCHES | MM | INCHES | MM | INCHES | MM |
|---|---|---|---|---|---|
| .0018 | .046 | .026 | .66 | .140 | 3.56 |
| .003 | .08 | .062 | 1.57 | .176 | 4.47 |
| .004 | .10 | .0638 | 1.620 | .273 | 6.93 |
| .006 | .15 | .070 | 1.78 | .280 | 7.11 |
| .010 | .25 | .080 | 2.03 | 1.218 | 30.94 |
| .020 | .51 | .084 | 2.13 | 2.50 | 63.5 |
| | | .118 | 3.00 | | |

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch=25.4 mm.
3. Each tool shall be legibly and permanently marked in accordance with MIL-STD-130.

Figure 1. Installing and removal tool.



FSC 5120

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:30Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

| | |
|---|---|
| Dimensions and configuration | See figure |
| Material: | |
| Tube | CRES |
| Shaft | Beryllium copper |
| Plating: | |
| Tube | Electrolytic polish |
| Shaft | Electroless nickel |
| Plunger force | N/A |
| Part number | M81969/21-01 |
| Application | This tool shall be used to install and remove interfacial seals onto the contacts as specified in MIL-C-85028/1. |

Custodians:
Army - EL
Navy - AS
Air Force - 11

Review activities:
Army - EL, GL
Navy - AS, EC
Air Force - 11, 17, 85, 99
DSA - ES

User activities:
Army -
Navy -
Air Force -

Preparing activity:
Navy - AS

Agent:
DSA - ES

(project 5120-0768-22)



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:30Z
Check the source to verify that this is the current version before use.