MILITARY SPECIFICATION SHEET

INSTALLING AND REMOVAL TOOLS, CONNECTOR ELECTRICAL CONTACT, (CRIMP REMOVABLE), TYPE I, CLASS 1, COMPOSITION A.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the tools described herein shall consist of this document and the latest issue of specification MIL-I-81969.

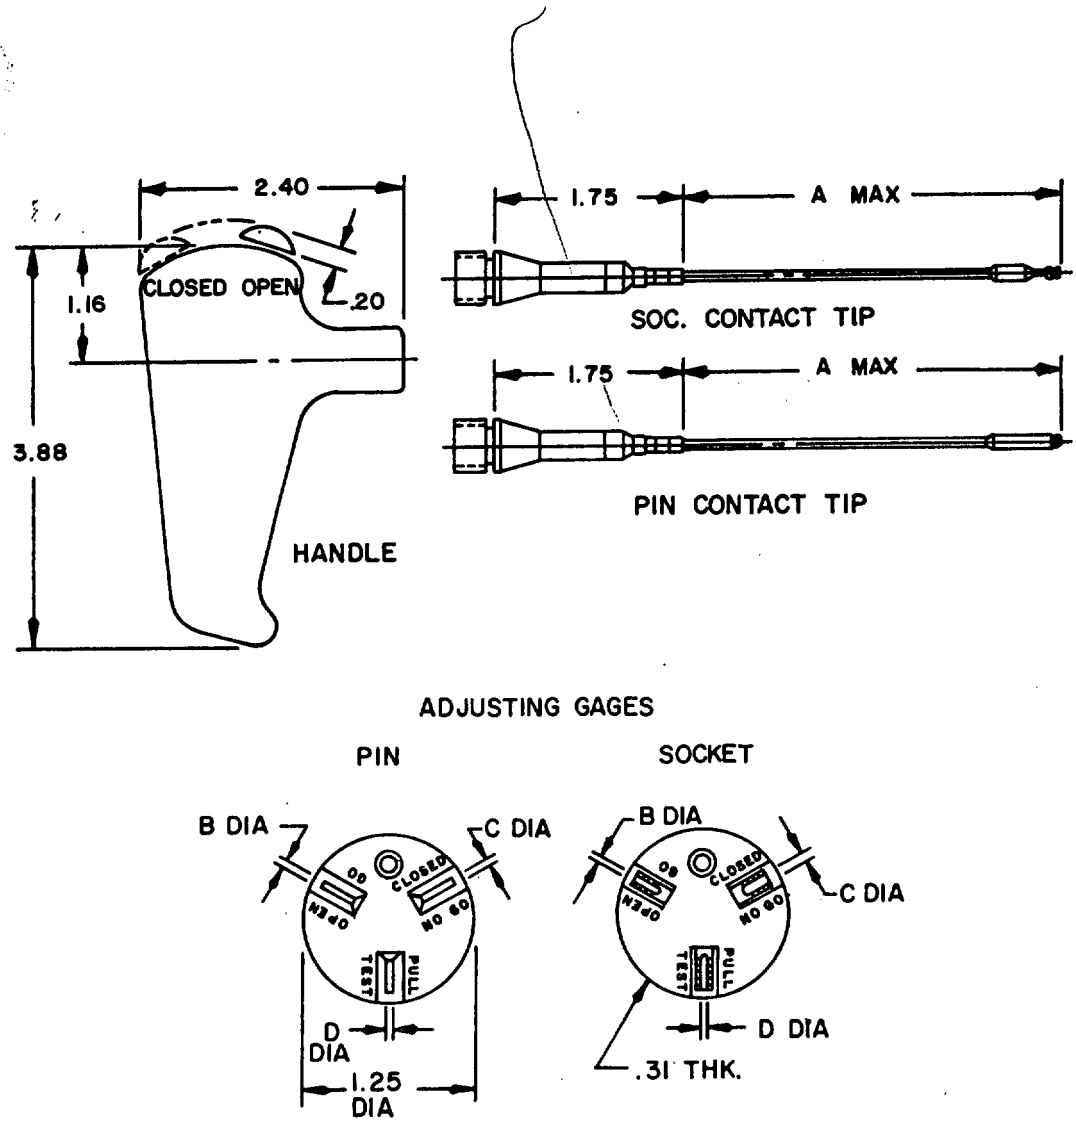



Figure 1. Installing tool.



FSC 5120

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:31Z
Check the source to verify that this is the current version before use.

SPANNER WRENCH

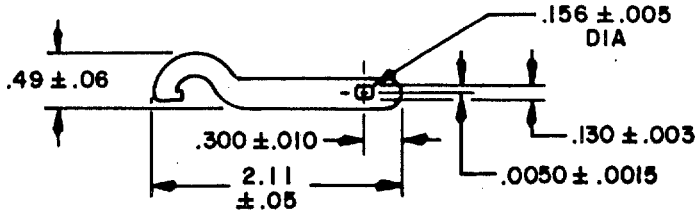



TABLE I. Dash numbers and dimensions.

| Dash number | Type | A ±.005 | B ±.0005 | C ±.0005 | D ±.0005 |
|---|---|---|---|---|---|
| -01 | Pin tool kit | 3.80 | .0620 | .0590 | .0610 |
| -02 | Socket tool kit | 3.50 | .0660 | .0690 | .0680 |
| -03 | Pin pull-thru tool replacement tip | 3.80 | --- | --- | --- |
| -04 | Socket pull-thru tool replacement tip | 3.50 | --- | --- | --- |

| INCHES | MM | INCHES | MM | INCHES | MM |
|---|---|---|---|---|---|
| .0005 | .01 | .0620 | 1.575 | .49 | 12.45 |
| .0015 | .04 | .0650 | 1.651 | 1.16 | 29.46 |
| .003 | .08 | .0660 | 1.676 | 1.25 | 31.75 |
| .005 | .13 | .0680 | 1.727 | 1.75 | 44.45 |
| .010 | .25 | .0690 | 1.753 | 2.11 | 43.59 |
| .05 | 1.3 | .130 | 3.30 | 2.40 | 60.96 |
| .0590 | 1.499 | .156 | 3.96 | 3.50 | 88.90 |
| .06 | 1.5 | .20 | 5.1 | 3.80 | 96.52 |
| .0610 | 1.549 | .300 | 7.62 | 3.88 | 98.55 |
| | | .31 | 7.87 | | |

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Unless otherwise specified, tolerances are ± .010 (.25 mm) for three place decimals and ± .02 (.51 mm) for two place decimals.
4. Each tool shall be legibly and permanently marked in accordance with MIL-STD-130.
5. M81969/23-01 and M81969/23-02 tool kits shall include pull-thru insertion tool, adjusting gage, two Spanner wrenches and detailed instruction sheets.

Figure 1. Installing tool - Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:31Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

| | |
|---|---|
| Dimensions and configuration | See figure and table 1 |
| Material: | |
| Handle | Aluminum alloy |
| Tip | Berylluim copper |
| Plating: | |
| Handle | Anodize |
| Tip | None |
| Part number | M81969/23-01 and M81969/23-02 |
| Application | This tool shall be used to install contacts specified in MIL-C-85028/1 and MIL-C-85028/2. |

Custodians:
Army - EL
Navy - AS
Air Force - 11

Review activities:
Army - EL, GL
Navy - AS, EC
Air Force - 11, 17, 85, 99
DSA - ES

User activities:
Army -
Navy -
Air Force -

Preparing activity:
Navy - AS

Agent:
DSA - ES

(Project 5120-0768-23)

☆ U.S. GOVERNMENT PRINTING OFFICE: 1977—703-020/ 301



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:31Z
Check the source to verify that this is the current version before use.