MILITARY SPECIFICATION SHEET

INSTALLING AND REMOVAL TOOLS, CONNECTOR ELECTRICAL CONTACT,
TYPE III, CLASS 2, COMPOSITION C

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the tools described herein shall consist of this document and the latest issue of Specification MIL-I-81969.


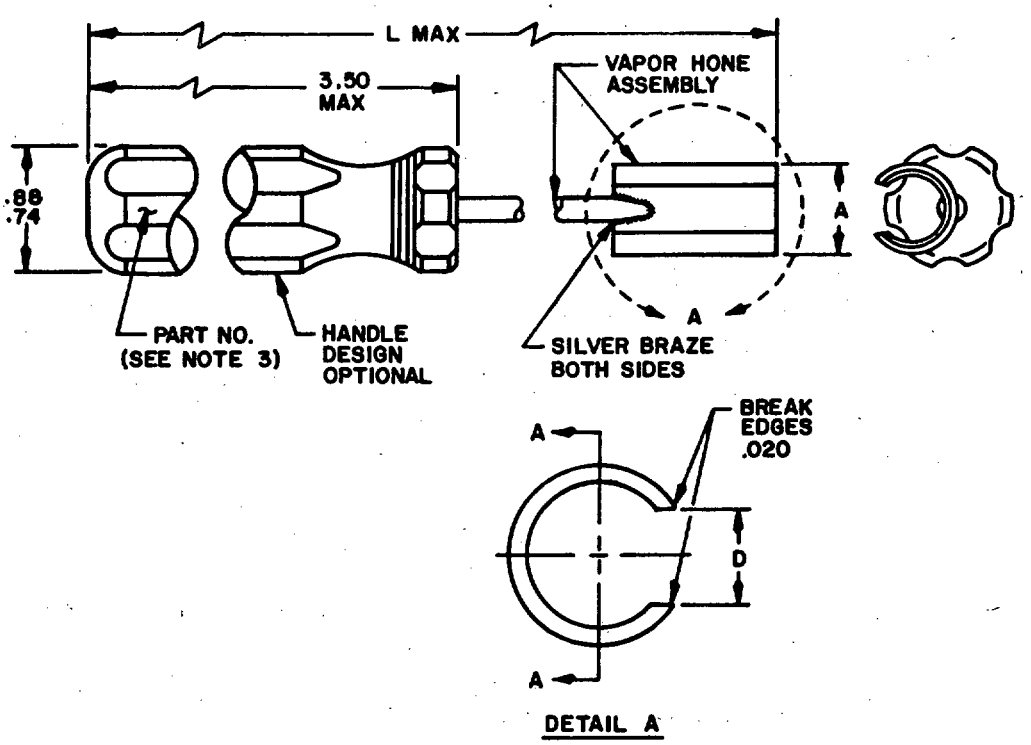


FIGURE 1. Installing and removal tool.

FSC 5120

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:31Z
Check the source to verify that this is the current version before use.

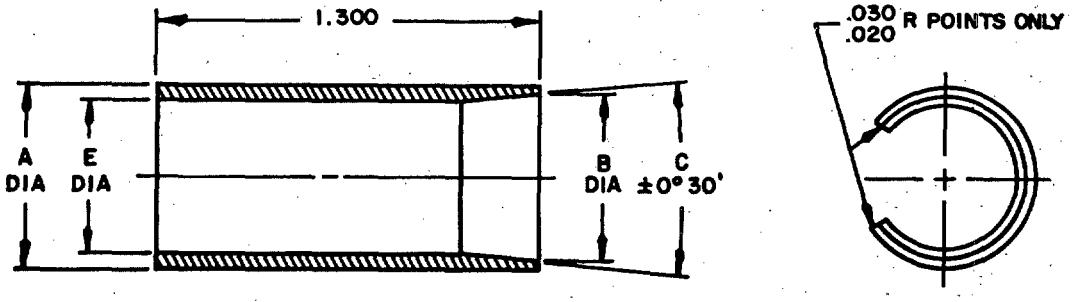

SECTION A-A

TABLE I. Dash number, connector type, and dimensions.

Dash number	Connector type(s)	A Dia.	B Dia.	C Angle	D	E Dia.	L Max.
-01	BNC/TNC	.625	.600	10°0'	.330	.527	12.00
-02	BNC/TNC	.625	.600	10°0'	.330	.527	6.00
-03	N	.875	.850	8°0'	.500	.777	12.00
-04	N	.875	.850	8°0'	.500	.777	6.00
-05	TPS	.531	.470	8°0'	.312	.442	12.00
-06	TPS	.531	.470	8°0'	.312	.442	6.00

INCHES	MM	INCHES	MM
.020	.51	.625	15.88
.030	.76	.74	18.8
.312	7.92	.777	19.74
.330	8.38	.850	21.59
.442	11.23	.875	22.22
.470	11.94	.88	22.4
.500	12.70	1.300	33.02
.527	13.39	3.50	88.9
.531	13.49	6.00	152.4
.600	15.24	12.00	304.8

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Stamp and white fill, lettering height .08 (2.0 mm).
4. Unless otherwise specified, tolerance is ±.003 (.08 mm).
5. All dimensions are after plating.
6. Remove all burrs and sharp edges.

FIGURE 1. Installing and removal tool - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:31Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1 and table I.

Material:
Handle - Plastic per L-P-410 or approved equivalent.
Shaft - Type 304, CRES, per MIL-T-8504 and as follows:
Collet: Type 304 CRES, per MIL-T-8504 and as follows:
Dash numbers
-01 and -02: 18 gage, .049 (1.24mm) wall thickness.
-03 thru -06: 16 gage .065 (1.65mm) wall thickness.

Plunger force: Not applicable.

Part number: M81969/25 - (and dash number from table I).

Application: These tools shall be used to install and remove connectors covered by the following dash numbers:
-01 thru -04 - Series BNC, TNC, and N connectors specified in MIL-C-39012.
-05 and -06 - Series TPS connectors specified in MIL-C-55235.

Custodians:
Army - EL
Navy - AS
Air Force - 11

Review activities:
Army - EL, MU
Navy - AS, EC
Air Force - 17, 85, 99
DSA - ES

User activities:
Army - AT
Navy - YD
Air Force - 19

Preparing activity:
Navy - AS

Agent:
DSA - ES

(Project 5120-0874)

☆ U. S. GOVERNMENT PRINTING OFFICE: 1977-703-020/2566

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:31Z
Check the source to verify that this is the current version before use.