
MILITARY SPECIFICATION SHEET

INSTALLING AND REMOVAL TOOLS, CONNECTOR ELECTRICAL CONTACT, TYPE II, CLASS 1, COMPOSITION A

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the tools described herein shall consist of this document and the latest issue of Specification MIL-I-81969.

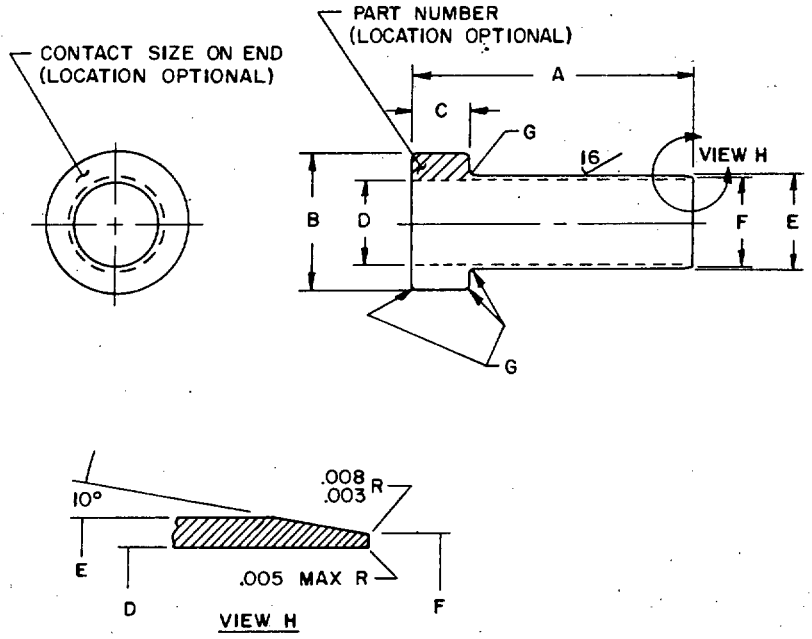

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Unless otherwise specified, tolerances are ±.010 inch (.25 mm) for decimals and ±2° for angles.
4. Concentricity is .004 inch (.10 mm) TIR (RFS).
5. Each tool shall be legibly and permanently marked on the handle in accordance with MIL-STD-130.
6. Metric equivalents are in parentheses.

FIGURE 1. Removal tool.

FSC 5120

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:31Z
Check the source to verify that this is the current version before use.

TABLE I. Dash numbers, contact size, dimensions, and superseded part numbers.

Dash number	Contact size	A ±.016 (.41)	B Dia ±.016 (.41)	C ±.016 (.41)	D Dia +.002 (.05) -.000	E Dia +.000 -.002 (.05)	F Dia -.000 +.002 (.05)	G Rad ±.031 (.79)	Superseded part number
-01	4/0	2.500 (63.50)	1.250 (31.75)	.500 (12.70)	.753 (19.13)	.790 (20.07)	.772 (19.61)	.062 (1.57)	MS90562-1
-02	2/0	2.500 (63.50)	1.125 (28.58)	.500 (12.70)	.659 (16.74)	.696 (17.68)	.678 (17.22)	.062 (1.57)	MS90562-2
-03	1/0	2.500 (63.50)	1.000 (25.40)	.500 (12.70)	.521 (13.23)	.558 (14.17)	.540 (13.72)	.062 (1.57)	MS90562-3
-04	2	2.500 (63.50)	.938 (23.83)	.500 (12.70)	.425 (10.80)	.462 (11.73)	.444 (11.28)	.062 (1.57)	MS90562-4
-05	4	2.500 (63.50)	.875 (22.22)	.500 (12.70)	.339 (8.61)	.376 (9.55)	.358 (9.09)	.062 (1.57)	MS90562-5
-06	6	2.500 (63.50)	.812 (20.62)	.500 (12.70)	.317 (8.05)	.354 (8.99)	.336 (8.53)	.062 (1.57)	MS90562-6

FIGURE 1. Removal tool - Continued.

REQUIREMENTS:

Dimensions and configuration: See figure 1 and table I.

Material: Corrosion resistant steel per QQ-S-763, class 303, condition A.

Finish: Not applicable.

Part number: M81969/27 -(and dash number from table I).

Application: These tools shall be used to remove MS90559 and MS90560 contacts from connectors specified in MIL-C-22992.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:31Z
Check the source to verify that this is the current version before use.

Custodians:
Army - CR
Navy - AS
Air Force - 85

Review activities:
Army - MI, AR, AT, GL
Navy - EC, SH, OS
Air Force - 11, 17, 99
DLA - ES

User activities:
Army -], ME, AV,
Navy - MC, YD
Air Force - 19

Preparing activity:
Navy - AS

Agent:
DLA - ES

(Project 5120-0911)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:31Z
Check the source to verify that this is the current version before use.