INCH-POUND


MIL-I-0081969/28B(USAF)
2 March 1990
SUPERSEDING
MIL-I-0081969/28A(USAF)
24 May 1988
USED IN LIEU OF
MIL-I-81969/28
11 January 1979

MILITARY SPECIFICATION SHEET

INSTALLING AND REMOVAL TOOLS, CONNECTOR ELECTRICAL CONTACTS, TYPE II, CLASS 2, COMPOSITION C

This specification is approved for use by the Electronic Support Division, AFLC 2750 ABW/ES based upon currently available technical information but it has not been approved for promulgation as a coordinated revision of MIL-I-81969/28. It is subject to modification. However, pending its promulgation as a coordinated military specification, it may be used in acquisition.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-I-81969.

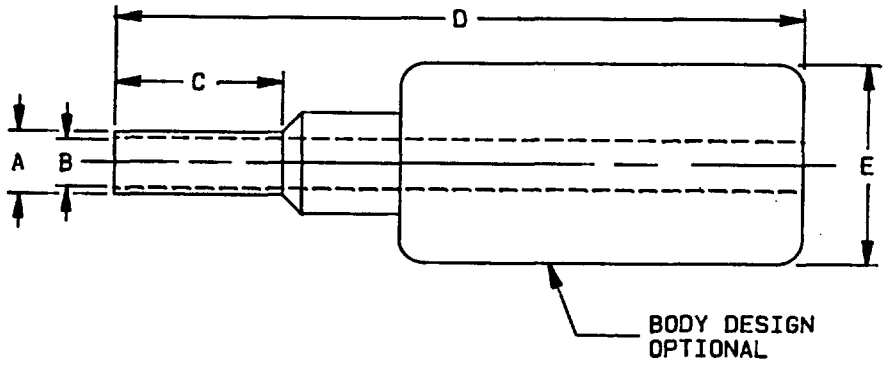


NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.005 inch (0.13 mm).
4. Tool is spring loaded closed, must open and close freely.
5. Each tool shall be legibly and permanently marked on the body in accordance with MIL-STD-130.
6. Metric equivalents are in parentheses.

Ⓑ FIGURE 1. Removal tool M81969/28-01 and -02.

Ⓑ denotes changes

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-08-08T06:35Z
Check the source to verify that this is the current version before use.

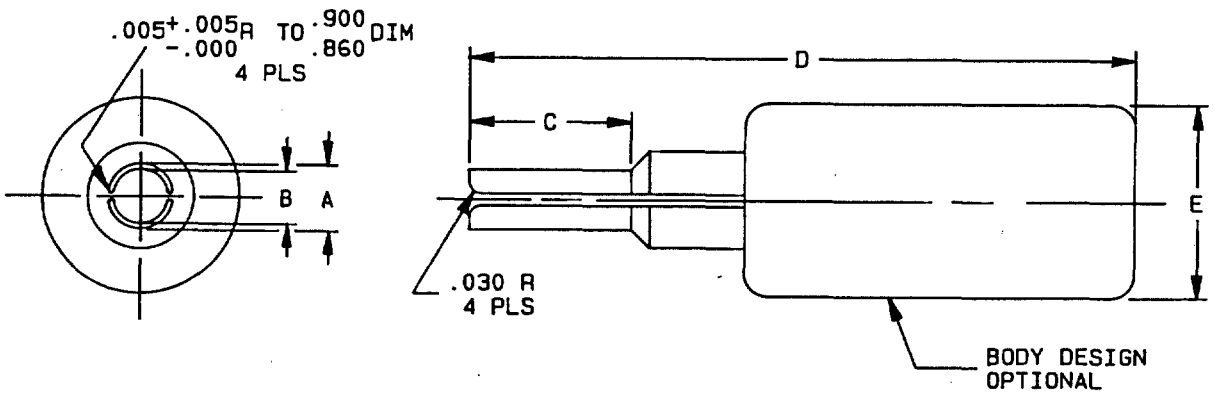

Inches	mm
.000	0.00
.005	0.13
.030	0.76
.860	21.84
.900	22.86

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.005 inch (0.13 mm).
4. Tool is spring loaded closed, must open and close freely.
5. Each tool shall be legibly and permanently marked on the body in accordance with MIL-STD-130.
6. Metric equivalents are in parentheses.

Ⓑ FIGURE 2. Removal tool M81969/28-03.

Ⓑ denotes changes

Source: https://assist.dla.mil -- Downloaded: 2026-08-28T06:35Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1, figure 2, and table I.

Material:

Handle: Extruded acetal or approved equivalent.

Tip: Metal, treated to resist corrosion.

Plating: Not applicable.

Ⓑ Part or Identifying Number (PIN): M81969/28 (and dash number from table I).

Application: Dash numbers 01 and 02 tools shall be used to remove coax contacts from connectors specified in MIL-C-81659, series 2. Dash number 03 tool shall be used to remove triaxial contacts specified in MIL-C-39029/95 and MIL-C-39029/96.

B TABLE I. Dash numbers, dimensions, and superseded part numbers.

Dash number	Contact size	A dia	B dia	C	D max	E max	Superseded PIN
-01	5 9	.287 (7.29) .285 (7.24)	.261 (6.63) .255 (6.48)	.770 (19.56) .730 (18.54)	3.064 (77.83)	.900 (22.86)	MS3178-001
-02	12	.194 (4.93) .186 (4.72)	.159 (4.04) .154 (3.91)	.656 (16.66) .620 (15.75)	3.064 (77.83)	.900 (22.86)	MS3178-002
-03	8	.314 (7.98) .311 (7.90)	.284 (7.21) .280 (7.11)	.900 (22.86) .860 (21.84)	3.064 (77.83)	.900 (22.86)	None

Ⓑ QPL evaluation activity: DESC-EQ.

CONCLUDING MATERIAL

Custodian:
Air Force - 85

Review activities:
Air Force - 12, 99
DLA - ES

User activity:
Air Force - 19

Preparing activity:
Air Force - 85

Agent:
DLA - ES

(Project 5120-FC58)

Source: https://assist.dla.mil -- Downloaded: 2026-00-08T06:35Z
Check the source to verify that this is the current version before use.