MILITARY SPECIFICATION SHEET

INSTALLING AND REMOVAL TOOLS, CONNECTOR ELECTRICAL CONTACT, TYPE II, CLASS 1, COMPOSITION B

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the tools described herein shall consist of this document and the latest issue of Specification MIL-I-81969.

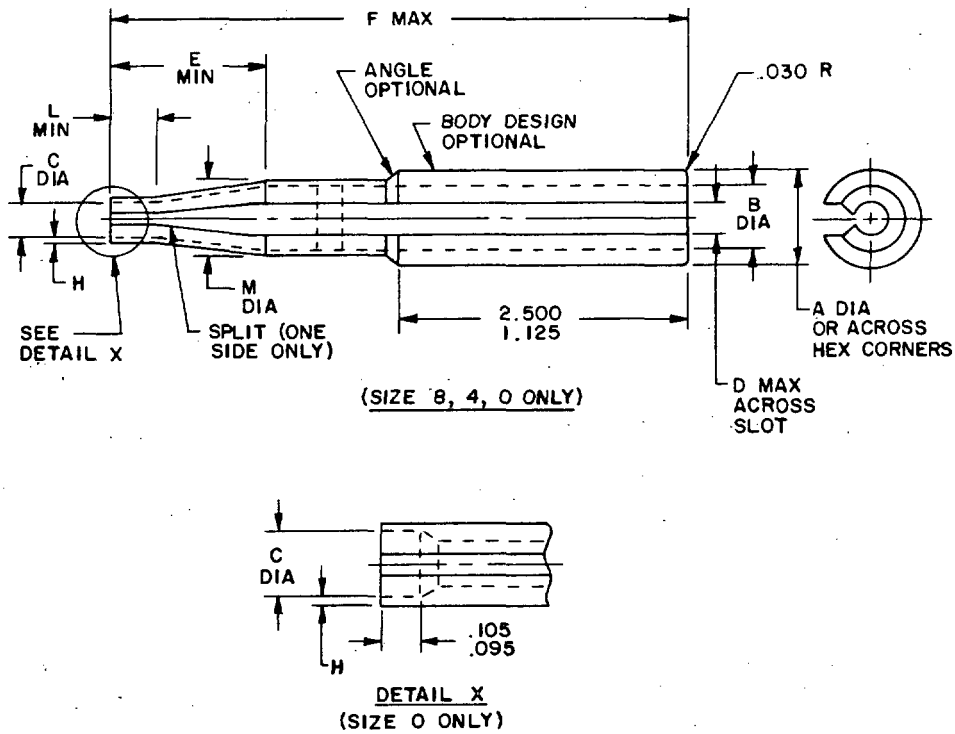


FIGURE 1. Removal tool, dash -02, -03, and -04.

1/ For complete supersession data, see page 3 of this specification.

FSC 5120

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:31Z
Check the source to verify that this is the current version before use.

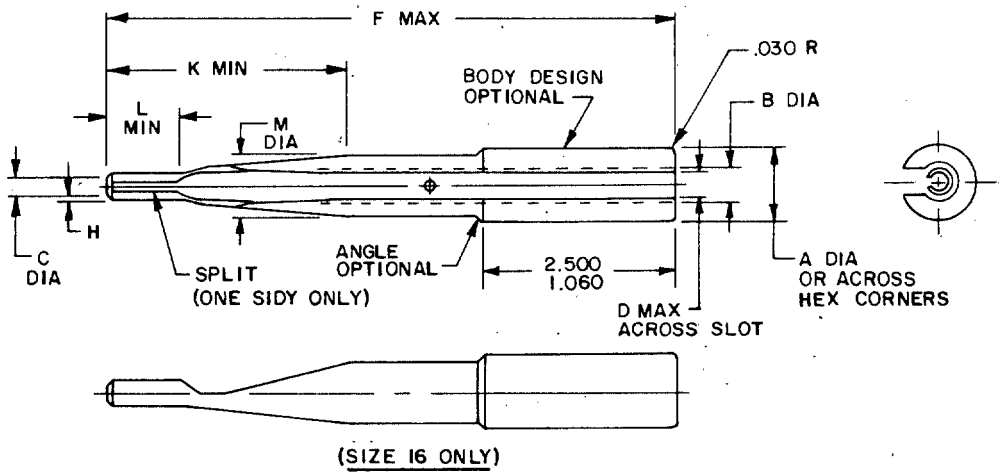


FIGURE 2. Removal tool, dash -01.

INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
.0135	.343	.105	2.67	.385	9.78	.610	15.49	1.060	26.92
.016	.41	.160	4.06	.390	9.91	.615	15.62	1.085	27.56
.0175	.444	.185	4.70	.410	10.41	.620	15.75	1.095	27.81
.018	.46	.195	4.95	.420	10.67	.641	16.28	1.100	27.94
.020	.51	.271	6.88	.425	10.80	.735	18.67	1.125	28.58
.021	.53	.274	6.96	.540	13.72	.745	18.92	1.219	30.96
.027	.69	.315	8.00	.575	14.60	.785	19.94	1.690	42.93
.030	.76	.320	8.13	.579	14.71	.875	22.22	2.090	53.09
.095	2.41	.340	8.64	.581	14.76	.945	24.00	2.500	63.50
.100	2.54	.383	9.73	.585	14.86	.950	24.13	5.000	127.00

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Unless otherwise specified, tolerances are ±.005 inch (.13 mm).
4. Slot design shall allow all applicable wire sizes to snap in tool freely.
5. Each tool shall be legibly and permanently marked on the handle in accordance with MIL-STD-130.

FIGURE 3. Metrics and notes for figures 1 and 2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:31Z
Check the source to verify that this is the current version before use.

TABLE I. Dash numbers, dimensions, and superseded part numbers.

Dash number	Wire barrel size	Color code	A Max	B Dia	C Dia	D Max	F Max	H	K Min	L Min	M Dia	Superseded part number
-01	16	Blue	.425	.195 .185	.105 .100	.160	5.000	.0175 .0135	1.100	.390	.340 .320	MS3165-16
-02	8	Red	.641	.420 .410	.274 .271	.315	5.000	.021 .016	1.690	.585	.575 .540	MS3165-8 M83723/32-08
-03	4	Blue	.875	.620 .610	.385 .383	.410	5.000	.020 .018	1.690	.585	.745 .735	MS3165-4 M83723/32-04
-04	0	Yellow	1.219	.950 .945	.581 .579	.615	5.000	.027 .020	2.090	.785	1.095 1.085	MS3165-0 M83723/32-00

REQUIREMENTS:

Dimensions and configuration: See figures 1, 2, 3, 4 and table I.

Material: Molded acetal, polyamide, or approved equivalent.

Plating: Not applicable.

Plunger force: Not applicable.

Part number: M81969/29 - (and dash number from table I).

Application: These tools shall be used to remove contacts from connectors specified in MIL-C-5015, MS3450's.

Supersession data: In addition to MS3165A(NAVY), the following document is also superseded by this specification.
a. MIL-C-83723/32(USAF), dated 12 October 1971.

Custodians:
Army - CR
Navy - AS
Air Force - 85

Review activities:
Army - MI, AR, AT, GL
Navy - EC, SH, OS
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - ME, AV,
Navy - MC, YD
Air Force - 19

Preparing activity:
Navy - AS

Agent:
DLA - ES

(Project 5120-0913)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:31Z
Check the source to verify that this is the current version before use.