
MILITARY SPECIFICATION SHEET

# INSTALLING AND REMOVAL TOOLS, CONNECTOR ELECTRICAL CONTACT, TYPE I, CLASS 1, COMPOSITION C

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the tools described herein shall consist of this document and the latest issue of Specification MIL-I-81969.

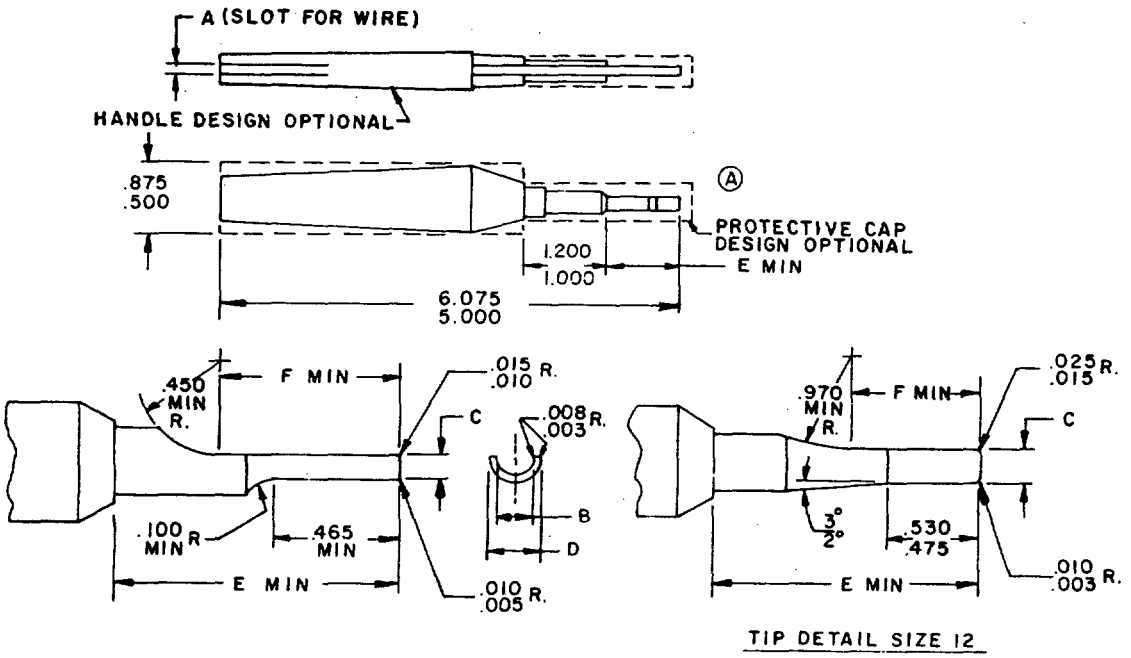


TIP DETAIL SIZE 23,20,16

TIP DETAIL SIZE 12

| INCHES | MM | INCHES | MM | INCHES | MM |
|---|---|---|---|---|---|
| .003 | .08 | .100 | 2.54 | .875 | 22.22 |
| .005 | .13 | .450 | 11.43 | .970 | 24.64 |
| .008 | .20 | .465 | 11.81 | 1.000 | 25.40 |
| .010 | .25 | .475 | 12.06 | 1.200 | 30.48 |
| .015 | .38 | .500 | 12.70 | 5.000 | 127.00 |
| .025 | .64 | .530 | 13.46 | 6.075 | 154.30 |

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
Ⓐ 3. Metal surfaces of tip to be polished and free from all nicks and burrs. Break sharp corners .005 inch (.13 mm) maximum radius unless otherwise specified.
Ⓐ 4. Slot design shall allow all applicable wire sizes to fit into the tool freely.
Ⓐ 5. Each tool shall be legibly and permanently marked on the handle in accordance with MIL-STD-130.
6. Metric equivalents are in parentheses.

FIGURE 1. Installing tool.

Ⓐ Denotes changes.

1/ For complete supersession data, see page 2 of this specification.

FSC 5120



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:30Z
Check the source to verify that this is the current version before use.

Ⓐ TABLE I. Dash number, contact size, and dimensions.

| Dash number | Contact size | A Min | B Dia | C | D Dia | E Min | F Min | Supersedes | Color code |
|---|---|---|---|---|---|---|---|---|---|
| -01 | 23 | .085 (2.16) | .053(1.35) .051(1.30) | .046(1.17) .042(1.07) | .068(1.73) .065(1.65) | .620 (15.75) | .465 (11.81) | MS3323-22 | Yellow |
| -02 | 20 | .093 (2.36) | .081(2.06) .079(2.01) | .060(1.52) .056(1.42) | .105(2.67) .102(2.59) | .620 (15.75) | .465 (11.81) | MS3323-20 | Red |
| -03 | 16 | .133 (3.38) | .106(2.69) .104(2.64) | .074(1.88) .070(1.78) | .134(3.40) .130(3.30) | 1.000 (25.40) | .710 (18.03) | MS3323-16 | Blue |
| -04 | 12 | .174 (4.42) | .163(4.14) .161(4.09) | .115(2.92) .110(2.79) | .191(4.85) .187(4.75) | 1.000 (25.40) | .710 (18.03) | MS3323-12 | Yellow |

REQUIREMENTS:

Dimensions and configuration: See figure 1 and table I.

Ⓐ Material:
Handle: Plastic per L-P-1193 impact strength 3 ft./lb inches minimum, or metal treated to resist corrosion.
Tip: Steel, corrosion resistant. Heat treated to Rockwell C48-52.

Plating: Not applicable.

Ⓐ Plunger force: Not applicable.

Part number: M81969/2 - (and dash number from table I).

Application: These tools shall be used to install contacts in connectors specified in MIL-C-81511, series 1 and 2 and covered by MS90460, MS90461, and MS3343.

Supersession data: In addition to MIL-I-81969/2, the following documents are also superseded by this specification.

a. MS90459(NAVY), dated 15 March 1967.
b. MS3323, dated 5 June 1970.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:30Z
Check the source to verify that this is the current version before use.

Custodians:
Army - CR
Navy - AS
Air Force - 85

Review activities:
Army - MI, AR, AT, GL
Navy - EC, SH, OS
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - ME, AV
Navy - MC, YD
Air Force - 19

Preparing activity:
Navy - AS

Agent:
DLA - ES

(Project 5120-0889-2)

☆ U.S. GOVERNMENT PRINTING OFFICE: 1979 — 603-022/524



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:30Z
Check the source to verify that this is the current version before use.