

MILITARY SPECIFICATION SHEET

INSTALLING AND REMOVAL TOOLS, CONNECTOR ELECTRICAL CONTACT, TYPE II, CLASS 2, COMPOSITION C


This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the tools described herein shall consist of this document and the latest issue of Specification MIL-I-81969.

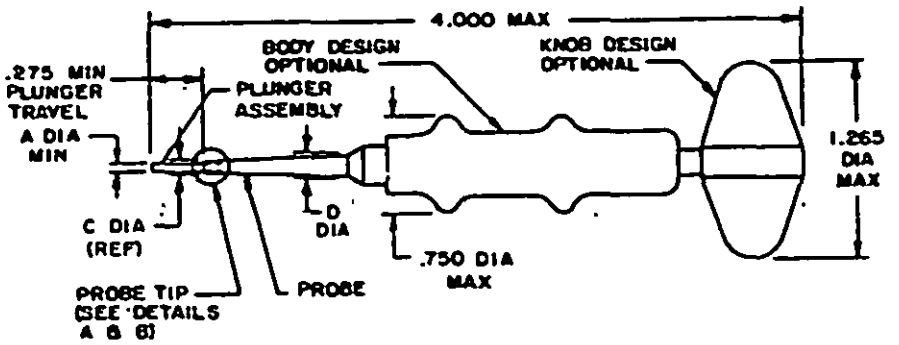

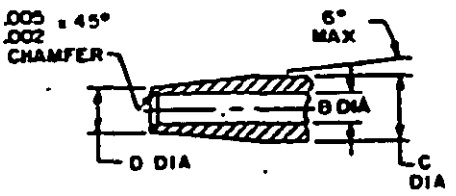

DETAIL A
-01 THRU -04

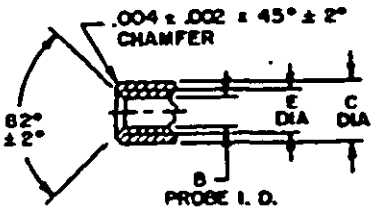

DETAIL B
-05, -06 & -07

INCHES	MM	INCHES	MM
.002	.05	.750	19.05
.004	.10	1.265	32.13
.005	.13	4.000	101.60
.275	6.98		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Unless otherwise specified, tolerances are ±.005 inch (.13 mm) for decimals and ±.5° for angles.
4. Each tool shall be legibly and permanently marked on the handle in accordance with MIL-STD-130.
5. Metric equivalents are in parentheses.

FIGURE 1. Removal tool.

1/ For complete supersession data, see page 3 of this specification

FSC 5120

Source: https://assist.dla.mil -- Downloaded: 202610-23T06:31Z
Check the source to verify that this is the current version before use.

TABLE I. Dash numbers, contact size, dimensions, and superseded part numbers.

Dash number	Contact size	Probe color	A Dia Min	B Dia Max	C Dia	D Dia	E Dia	Superseded part number
-01	22	Yellow	.040(1.02)	.0460(1.168) .0440(1.118)	.075 (1.90)	.0645(1.638) .0620(1.575)	----	MS3159-22
-02	20	Red	.050(1.27)	.0595(1.511) .0575(1.460)	.097 (2.46)	.0790(2.001) .0765(1.943)	----	MS3159-20
-03	16	Blue	.060(1.52)	.0910(2.311) .0890(2.261)	.129 (3.28)	.1110(2.819) .1085(2.756)	----	MS3159-16
-04	12	Yellow	.070(1.78)	.1500(3.810) .1480(3.759)	.196 (4.98)	.1725(4.382) .1700(4.318)	----	MS3159-12
-05	20	Red	.062(1.57)	.0755(1.918) .0725(1.842)	.1035(2.629) .1005(2.553)	.155 (3.94) .140 (3.56)	.0895(2.273) .0865(2.197)	MS3448-001A
-06	16	Blue	.062(1.57)	.1010(2.565) .0985(2.502)	.1345(3.416) .1315(3.340)	.185 (4.58) .170 (4.32)	.1175(2.984) .1145(2.908)	MS3448-001B
-07	12	Yellow	.062(1.57)	.1480(3.759) .1465(3.721)	.1925(4.890) .1895(4.813)	.245 (6.22) .230 (5.84)	.1735(4.407) .1705(4.331)	MS3448-001C

Source: https://assist.dla.mil -- Downloaded: 202610-23T06:31Z
Check the source to verify that this is the currentversion before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1 and table I.

Material:
Body and Knob: Aluminum or plastic.
Probe: Plastic.
Plunger assembly: Steel, brass, or aluminum.

Finish: Metal parts shall be suitably protected to resist corrosion.

Part number: MS1969/30 - (add dash number from table I).

Application: Dash -01 thru -04 shall be used to remove contacts from connectors specified in MIL-C-81511, series 3 and 4, while dash -05 thru -07 shall be used to remove contacts from connectors specified in MIL-C-26482 and MIL-C-81703.

Supersession data: In addition to MS3159(NAVY), the following document is also superseded by this specification.
a. MS3148(NAVY), dated 1 April 1971.

Custodians:
Army - CR
Navy - AS
Air Force - 85

Review activities:
Army - MI, AR, AT, GL
Navy - EC, SH, OS
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - ME, AV
Navy - MC, YD
Air Force - 19

Preparing activity:
Navy - AS

Agent:
DLA - ES

(Project 5120-0914)

GOVERNMENT PRINTING OFFICE: 1979 - 603-027/538

Source: https://assist.dla.mil -- Downloaded: 202640-23T06:31Z
Check the source to verify that this is the current version before use.