MILITARY SPECIFICATION SHEET

INSTALLING AND REMOVAL TOOLS, CONNECTOR ELECTRICAL CONTACT, TYPE III, CLASS 1, COMPOSITION A

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the tools described herein shall consist of this document and the latest issue of Specification MIL-I-81969.

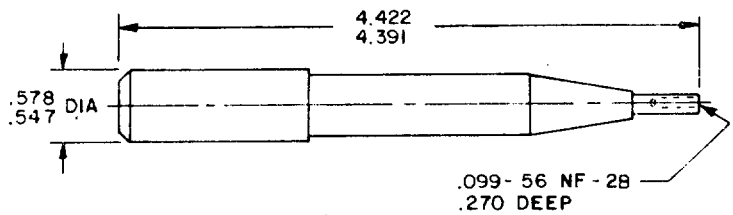


FIGURE 1. Installing and removal tool, handle dash -01.

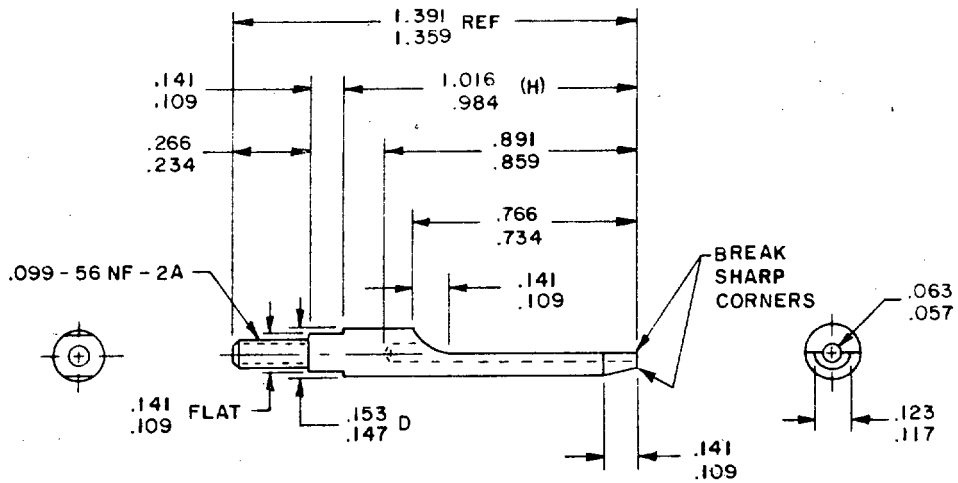


FIGURE 2. Installing and removal tool (crimped contact installing tip), dash -02.

1/ For complete supersession data, see page 5 of this specification.

FSC 5120

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:31Z
Check the source to verify that this is the current version before use.

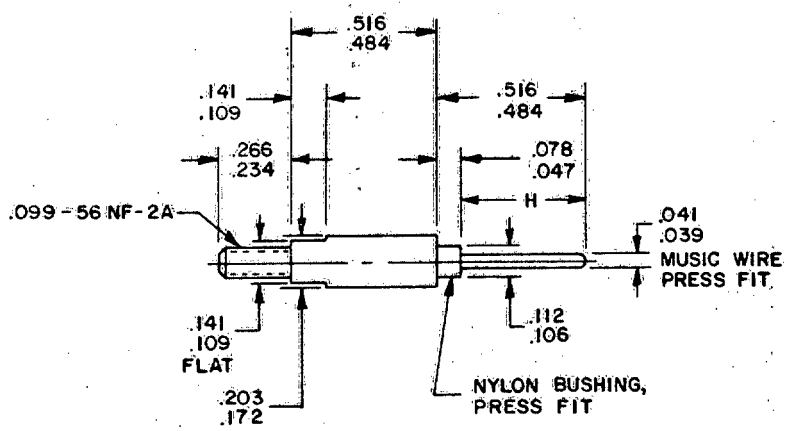


FIGURE 3. Installing and removal tool (female contact removal tip), dash -03.

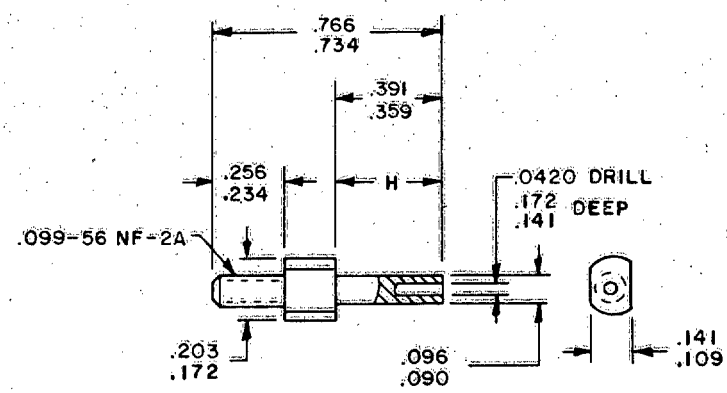


FIGURE 4. Installing and removal tool (male contact removal tip), dash -04.

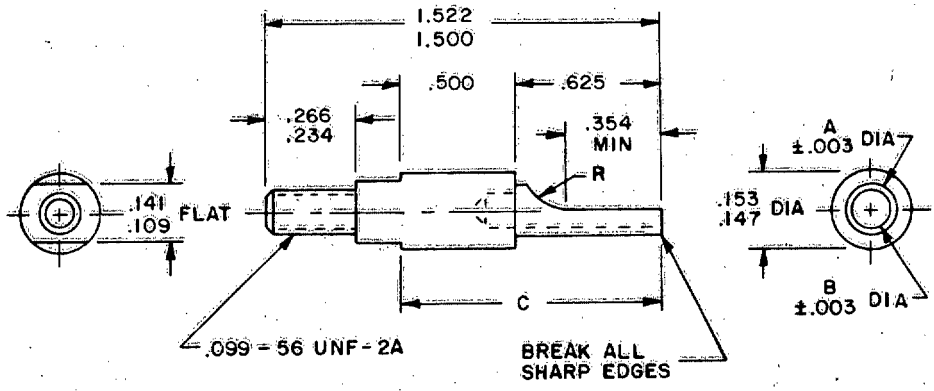


FIGURE 5. Installing and removal tool (installing tip), dash -05 and -06.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:31Z
Check the source to verify that this is the current version before use.

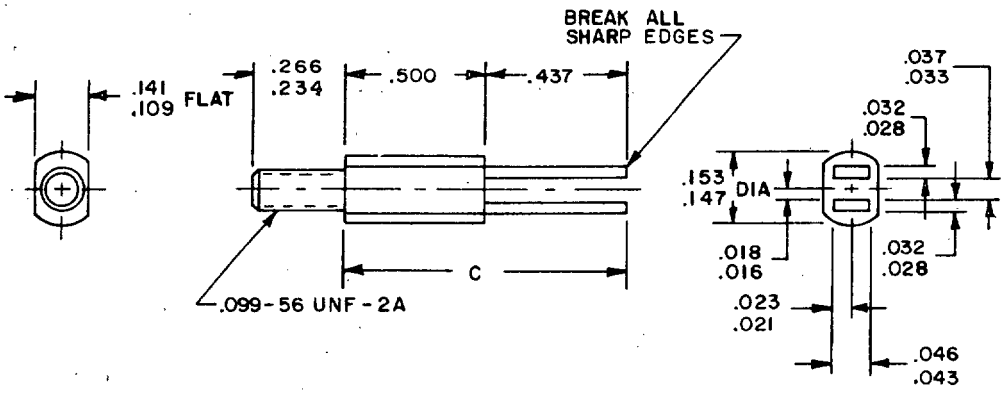


FIGURE 6. Installing and removal tool (removal tip), dash -07.

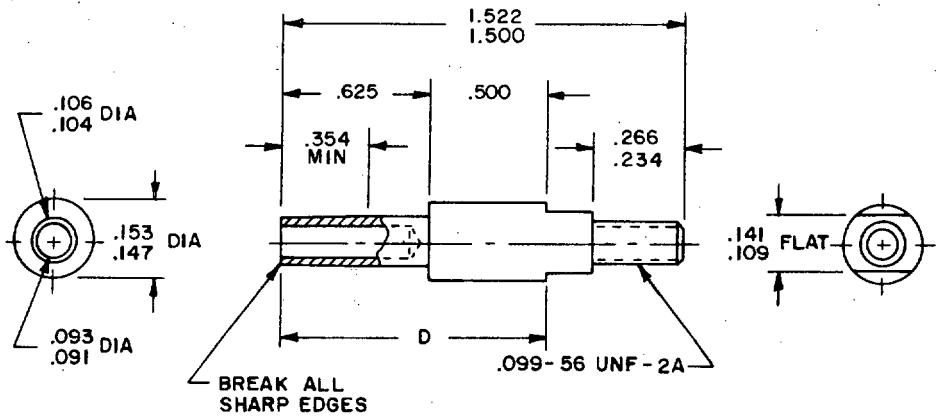


FIGURE 7. Installing and removal tool (installing tip), dash -08.

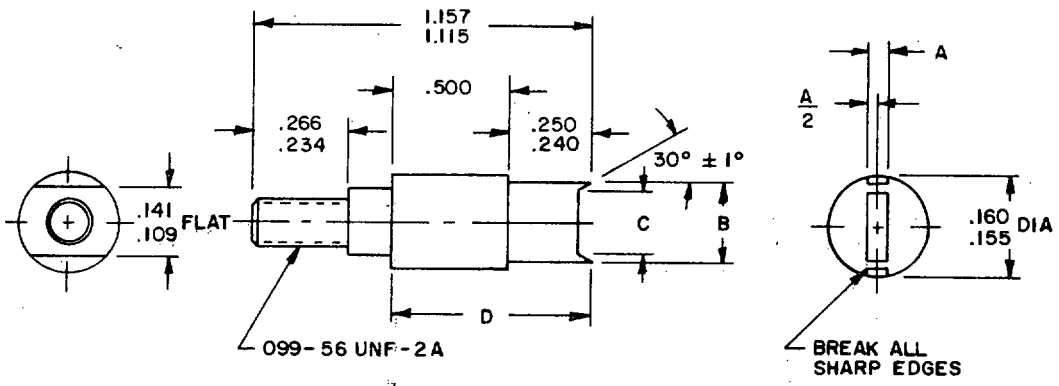


FIGURE 8. Installing and removal tool (installing tip), dash -09 and -10.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:31Z
Check the source to verify that this is the current version before use.

INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
.003	.08	.046	1.17	.106	2.69	.234	5.94	.766	19.46
.005	.13	.047	1.19	.109	2.77	.240	6.10	.859	21.82
.016	.41	.050	1.27	.112	2.84	.250	6.35	.891	22.63
.018	.46	.057	1.45	.117	2.97	.266	6.76	.984	24.99
.021	.53	.060	1.52	.123	3.12	.354	8.99	1.016	25.81
.023	.58	.063	1.60	.125	3.18	.359	9.12	1.115	28.32
.028	.71	.078	1.98	.130	3.30	.391	9.93	1.157	29.39
.030	.76	.080	2.03	.141	3.58	.437	11.10	1.359	34.52
.032	.81	.081	2.06	.147	3.73	.484	12.29	1.391	35.33
.033	.84	.090	2.29	.150	3.81	.500	12.70	1.500	38.10
.037	.94	.091	2.31	.153	3.89	.516	13.11	1.522	38.66
.039	.99	.093	2.36	.155	3.94	.547	13.89	4.391	115.53
.041	1.04	.096	2.44	.160	4.06	.578	14.68	4.422	112.32
.0420	1.067	.099	2.51	.172	4.37	.625	15.88		
.043	1.09	.104	2.64	.203	5.16	.734	18.64		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Unless otherwise specified, tolerances are ±.005 inch (.13 mm).
4. Concentricity is .004 inch (.10 mm) TIR for all diameters.
5. Unless otherwise specified, all machine surfaces shall be 63 (.0016 mm, r.m.s.) or better.
6. Each tool shall be legibly and permanently marked in accordance with MIL-STD-130.

FIGURE 9. Metrics and notes for figures 1 thru 8.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:31Z
Check the source to verify that this is the current version before use.

TABLE I. Dash numbers, dimensions, and superseded part numbers.

Dash number	Ref figure	Used on	Rockwell hardness	A	B	C	Supersedes
-01	1	-02 thru -10	---	---	---	---	MS18137-20-1
-02	2	MS18134-20 MS18136-20	'H' C48-50	---	---	---	MS18137-20-2
-03	3	MS18134-20	'H' C54-55	---	---	---	MS18137-20-3
-04	4	MS18136-20	'H' C48-50	---	---	---	MS18137-20-4
-05	5	M28754/5-02	'C' C45-55	.081 ±.003	.130 ±.003	---	MS14035-02
-06	5	M28754/5-01	'C' C45-55	.096 ±.003	.130 ±.003	---	MS14035-03
-07	6	M28754/5-01 M28754/5-02	'C' C45-55	---	---	---	MS14035-01
-08	7	M28754/2	'D' C45-55	---	---	---	MS14036-01
-09	8	M28754/3-01 thru M28754/3-19	'D' C45-55	.030 +.000 -.005	.080 ±.005	.060 ±.005	MS14036-02
-10	8	M28754/3-20 thru M28754/3-29	'D' C45-55	.050 +.000 -.005	.150 ±.005	.125 ±.005	MS14036-03

REQUIREMENTS:

Dimensions and configuration: See figures 1 thru 9 and table I.

Material: Tool steel, except where otherwise specified, hardened as indicated in table I.

Finish: Metal parts shall be suitably protected to resist corrosion.

Part number: M81969/31 - (and dash number from table I).

Application:
Dash -02 thru -04 shall be used to install and remove MS18134 and MS18136 contacts from connectors specified in MIL-C-55302.
Dash -05 thru -07 shall be used to install and remove contacts from connectors specified in MIL-C-28754/5.
Dash -08 thru -10 shall be used to install and remove contacts from connectors specified in MIL-C-28754/2 and MIL-C-28754/3.

Supersession data: In addition to MS18137B(SHIPS), the following documents are also superseded by this specification.
a. MS14035A, dated 9 August 1972.
b. MS14036A, dated 9 August 1972.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:31Z
Check the source to verify that this is the current version before use.

Custodians:
Army - CR
Navy - AS
Air Force - 85

Review activities:
Army - MI, AR, AT, GL
Navy - EC, SH, OS
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - , ME, AV,
Navy - MC, YD
Air Force - 19

Preparing activity:
Navy - AS

Agent:
DLA - ES

(Project 5120-0915)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:31Z
Check the source to verify that this is the current version before use.