MIL-I-81969/33A(EC)
9 November 1979
SUPERSEDING
MIL-I-81969/33(EC)
1 May 1978

MILITARY SPECIFICATION SHEET

INSTALLING AND REMOVAL TOOLS, CONNECTOR
ELECTRICAL CONTACT, TYPE I, CLASS 1, COMPOSITION A
(For Use With MIL-C-28840(EC) Connectors)

This specification sheet is approved for use by the Naval Electronic Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the tools described herein shall consist of this document and the latest issue of specification MIL-I-81969.


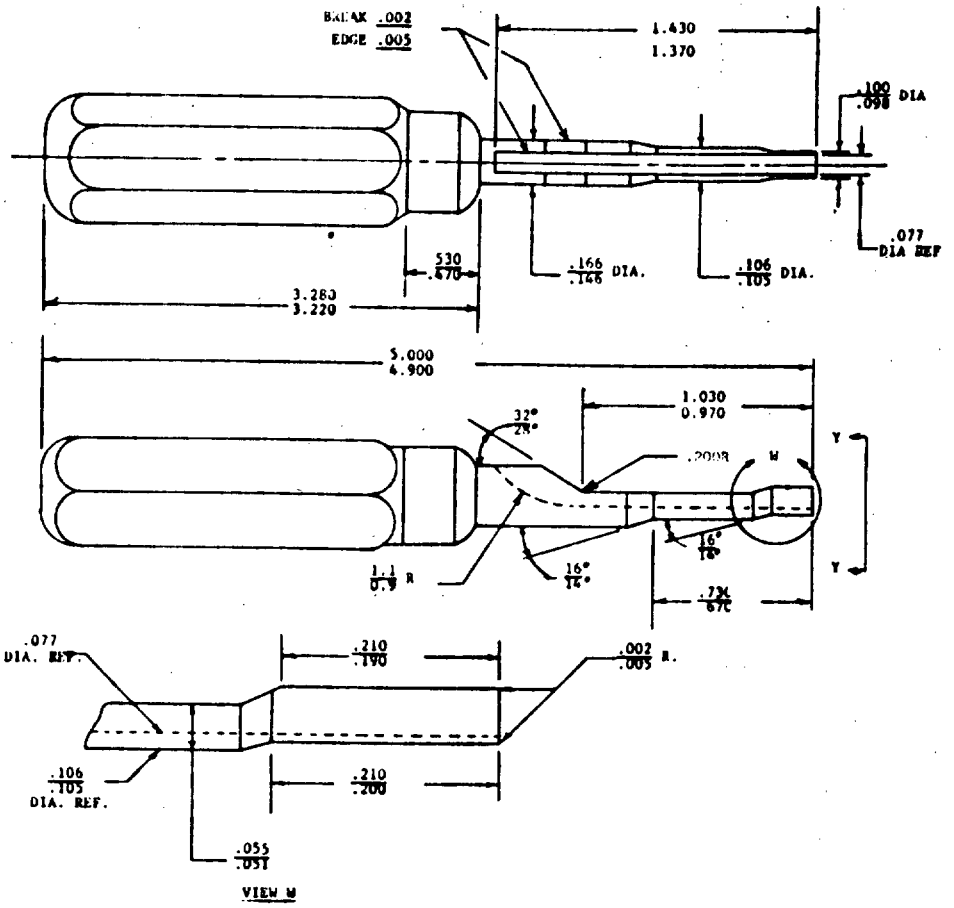


FIGURE 1. Straight extension installing tool.

FSC 5120

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:31Z
Check the source to verify that this is the current version before use.

INCHES	MM	INCHES	MM
.002	.05	.210	5.33
.005	.13	.470	11.94
.051	1.30	.590	13.46
.055	1.40	.600	15.24
.065	1.65	.650	16.51
.076	1.93	.670	17.02
.077	1.96	.730	18.54
.078	1.98	.900	22.86
.098	2.49	.970	24.64
.100	2.54	1.030	26.16
.105	2.67	1.100	27.94
.106	2.69	1.320	34.80
.146	3.71	1.430	36.32
.166	4.22	3.220	81.79
.190	4.83	3.280	83.31
.200	5.08	4.900	124.46
		5.000	127.00

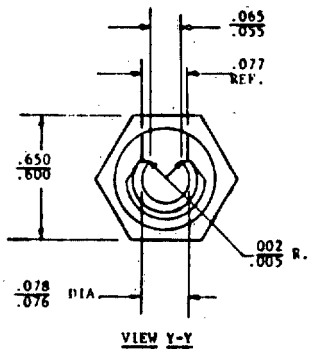



NOTES:

1. Dimensions are in inches
2. Metric equivalents are given for general information only and are based upon 1 inch = 25.4 mm.
3. Each tool shall be legibly and permanently marked in accordance with MIL-STD-130.


FIGURE 1. Straight extension installing tool. (Continued)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:31Z
Check the source to verify that this is the current version before use.

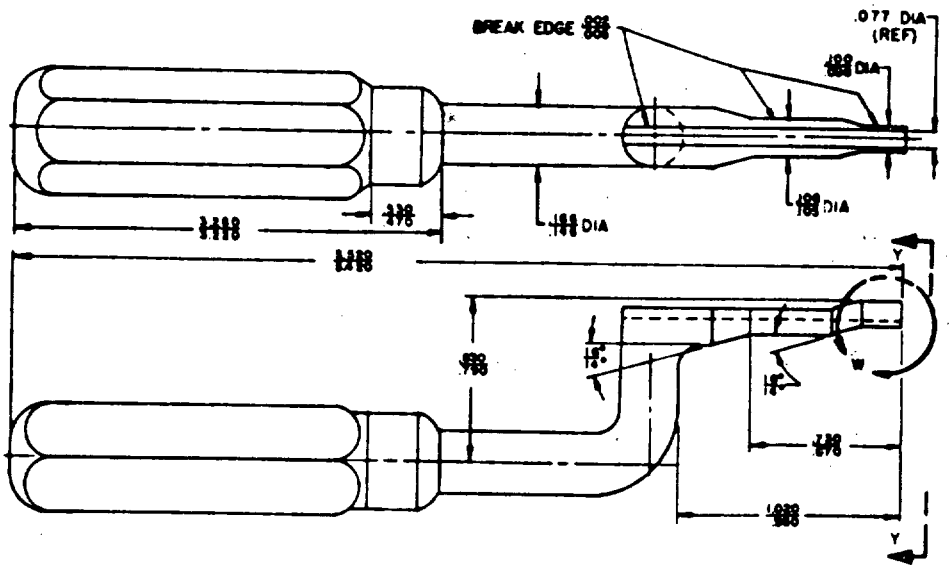

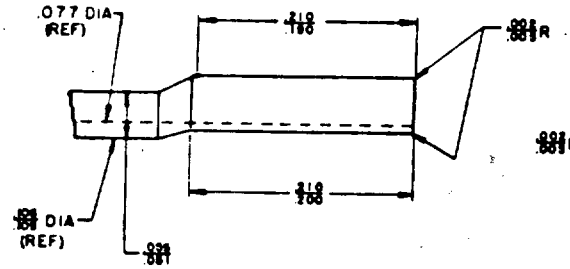

VIEW - W



VIEW Y-Y

INCHES	MM	INCHES	MM
.008	.08	.210	5.33
.008	.13	.470	11.94
.051	1.30	.530	13.46
.055	1.40	.600	15.24
.065	1.68	.650	16.51
.076	1.93	.670	17.02
.077	1.96	.710	18.54
.078	1.98	.790	20.07
.098	2.49	.830	21.08
.100	2.54	.960	24.38
.105	2.67	1.020	25.91
.106	2.69	3.220	81.79
.146	3.71	3.280	83.31
.166	4.22	5.410	137.41
.190	4.83	5.520	140.21
.200	5.08		

NOTES:

1. Dimensions are in inches
2. Metric equivalents are given for general information only and are based upon 1 inch = 25.4 mm.
3. Each tool shall be legibly and permanently marked in accordance with MIL-STD-130.

FIGURE 2. Angled extension installing tool.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:31Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See FIGURES 1 and 2

Material:
- Probe: M2 steel hardened to Rockwell 53-57 condition C.
- Handle: Aluminum alloy.

Finish:
- Probe: Polished, free from nicks and burrs.
- Handle: Not applicable, red anodized only.

Application: These tools are used to insert removable contacts in connectors conforming to specification MIL-C-28840.

Part numbers:
- Straight extension: M81969/33-01
- Angled extension: M81969/33-02

Revision letters are not used to denote changes due to the extensiveness of the changes.

Preparing activity:
Navy-EC
(Project 5120-N957)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:31Z
Check the source to verify that this is the current version before use.