
MILITARY SPECIFICATION SHEET

INSTALLING AND REMOVAL TOOLS, CONNECTOR ELECTRICAL CONTACT, TYPE II, CLASS 1, COMPOSITION C

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the tools described herein shall consist of this document and the latest issue of Specification MIL-I-81969.

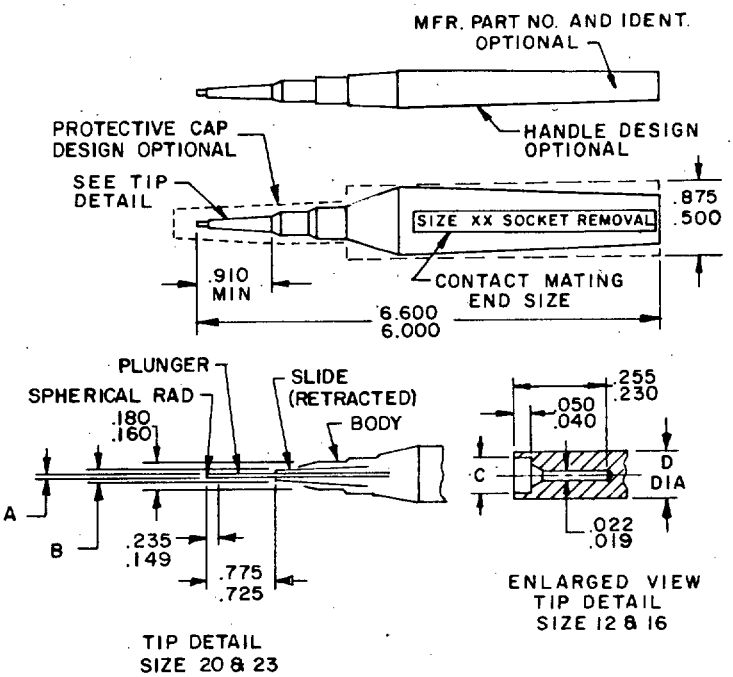

Ⓐ FIGURE 1. Removal tool, dash -01 thru -04.

Ⓐ Denotes changes.

1/ For complete supersession data, see page 4 of this specification.

FSC 5120

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:30Z
Check the source to verify that this is the current version before use.

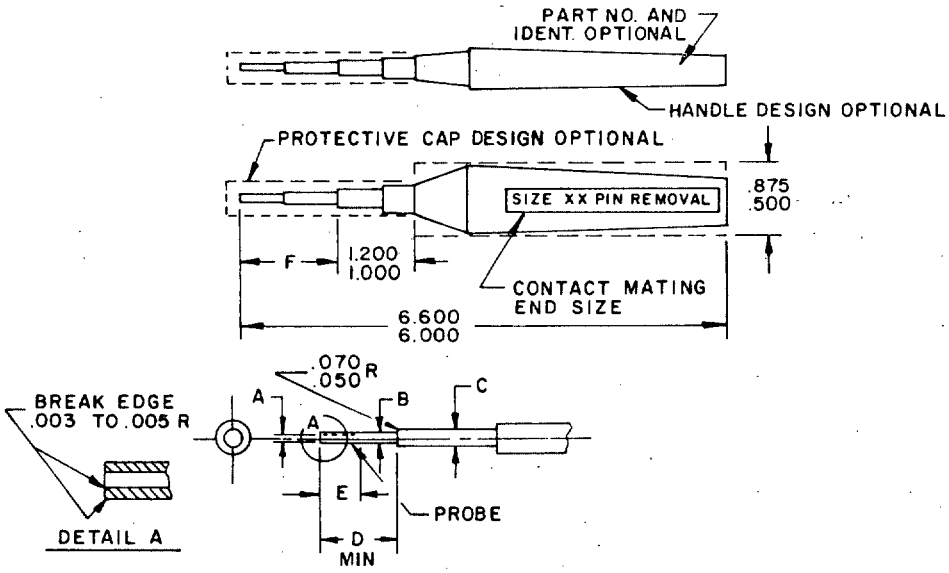


FIGURE 2. Removal tool, dash -05 thru -08.

INCHES	MM	INCHES	MM	INCHES	MM
.003	.08	.160	4.06	.875	22.22
.005	.13	.180	4.57	.910	23.11
.019	.48	.230	5.84	1.000	25.40
.022	.56	.235	5.97	1.200	30.48
.040	1.02	.255	6.48	6.000	152.40
.050	1.27	.500	12.70	6.600	167.64
.070	1.78	.725	18.42		
.149	3.78	.775	19.68		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
Ⓐ 3. Each tool shall be legibly and permanently marked on the handle in accordance with MIL-STD-130.
4. Metric equivalents are in parentheses.

FIGURE 3. Metric and notes for figures 1 and 2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:30Z
Check the source to verify that this is the current version before use.

Ⓐ TABLE I. Dash numbers, contact size, and dimensions.

Dash number	Contact size	A Dia	B Dia	C Dia	D	E Min	F	Supersedes	Color code
-01	23	.027 (.69) .026 (.66)	.105(2.67) .090(2.29)	---	---	---	---	MS3344-23	Yellow
-02	20	.039 (.99) .037 (.94)	.115(2.92) .100(2.54)	---	---	---	---	MS3344-20	Red
-03	16	---	---	.045(1.14) .043(1.09)	.060 (1.52) .058 (1.47)	---	---	MS3344-16	Blue
-04	12	---	---	.073(1.85) .071(1.80)	.094 (2.39) .092 (2.34)	---	---	MS3344-12	Yellow
-05	23	.0315(.800) .0285(.724)	.050(1.27) .046(1.17)	.130(3.30) .120(3.05)	.530(13.46)	.213 (5.41)	1.250(31.75) 1.195(30.35)	MS3342-23	Yellow
-06	20	.0440(1.118) .0415(1.054)	.077(1.96) .074(1.88)	.130(3.30) .120(3.05)	.530(13.46)	.213 (5.41)	1.250(31.75) 1.195(30.35)	MS3342-20	Red
-07	16	.066 (1.68) .064 (1.63)	.110(2.79) .106(2.69)	.190(4.83) .180(4.57)	.530(13.46)	.213 (5.41)	1.250(31.75) 1.195(30.35)	MS3342-16	Blue
-08	12	.120 (3.05) .117 (2.97)	.157(3.99) .154(3.91)	.252(6.40) .248(6.30)	.770(19.56)	.265 (6.73)	1.480(37.59) 1.440(36.58)	MS3342-12	Yellow

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:30Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1, 2, 3 and table I.

Material:
Dash numbers -01 thru -04.
Springs: Steel, corrosion resistant or treated for corrosion resistance.
Handle, cap, body, and slide: Plastic per L-P-1183 or metal.

Dash numbers -05 thru -08
Plastic per L-P-1183, or metal treated to resist corrosion.

Plating: Not applicable.

Part number: M81969/3 - (and dash number from table I).

Application: These tools shall be used to remove contacts covered by the following:

Dash numbers	
-01 thru -04	MS90460 and MS3343 from series 1 and 2 connectors specified in MIL-C-81511.
-05 thru -08	MS90461 from series 1 and 2 connectors specified in MIL-C-81511.

(A) Supersession data: In addition to MIL-I-81969/3, the following documents are also superseded by this document.

a. MS90458C, dated 21 March 1972.
b. MS3342B, dated 5 June 1970.
c. MS3344B, dated 5 June 1970.

Custodians:
Army - CR
Navy - AS
Air Force - 85

Review activities:
Army - MI, AR, AT, GL
Navy - EC, SH, OS
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - , ME, AV,
Navy - MC, YD
Air Force - 19

Preparing activity:
Navy - AS

Agent:
DLA - ES

(Project 5120-0889-3)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:30Z
Check the source to verify that this is the current version before use.