MILITARY SPECIFICATION SHEET

INSTALLING AND REMOVAL TOOLS, CONNECTOR ELECTRICAL CONTACT, (FORK TYPE, WRAPPOST/CRIMP REMOVABLE), TYPE II, CLASS 1, COMPOSITION C

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the tools described herein shall consist of this document and the latest issue of Specification MIL-I-81969.

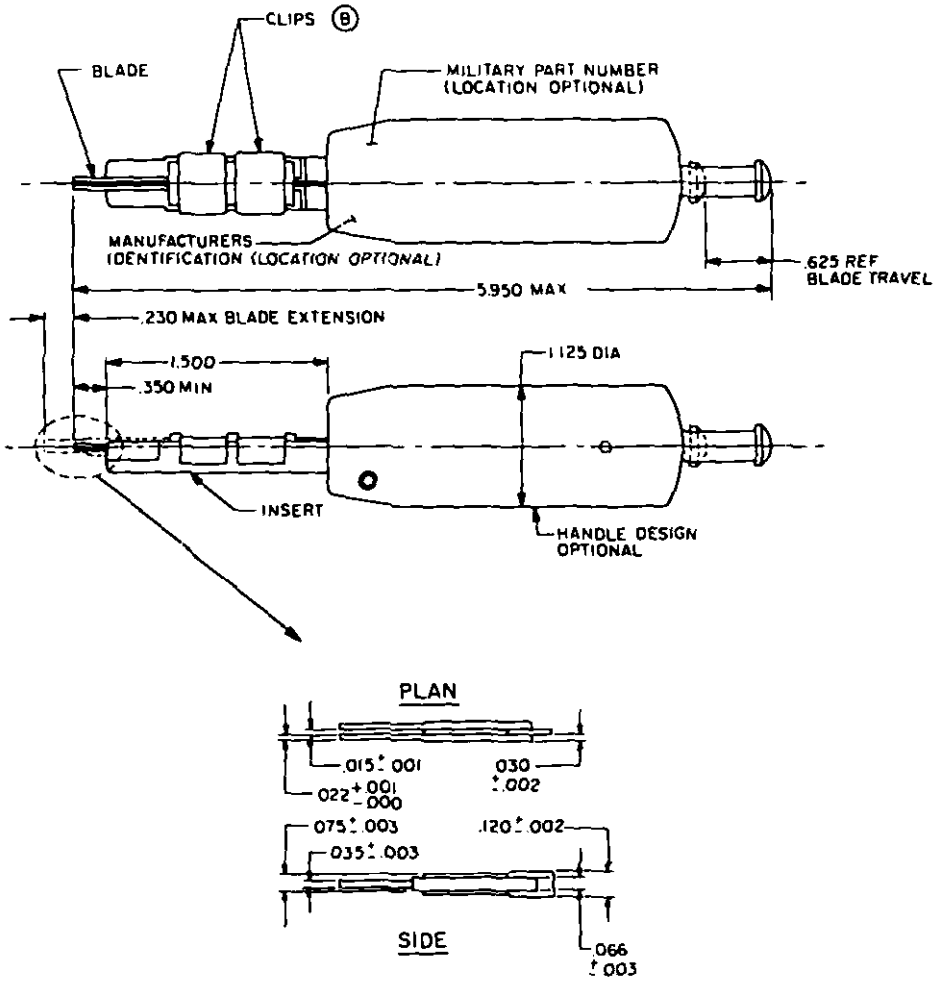


FIGURE 1. Removal tool, dash -01.

(B) Denotes changes.

FSC 5120

Source: https://assist.dla.mil -- Downloaded: 202610-23T06:30Z
Check the source to verify that this is the current version before use.

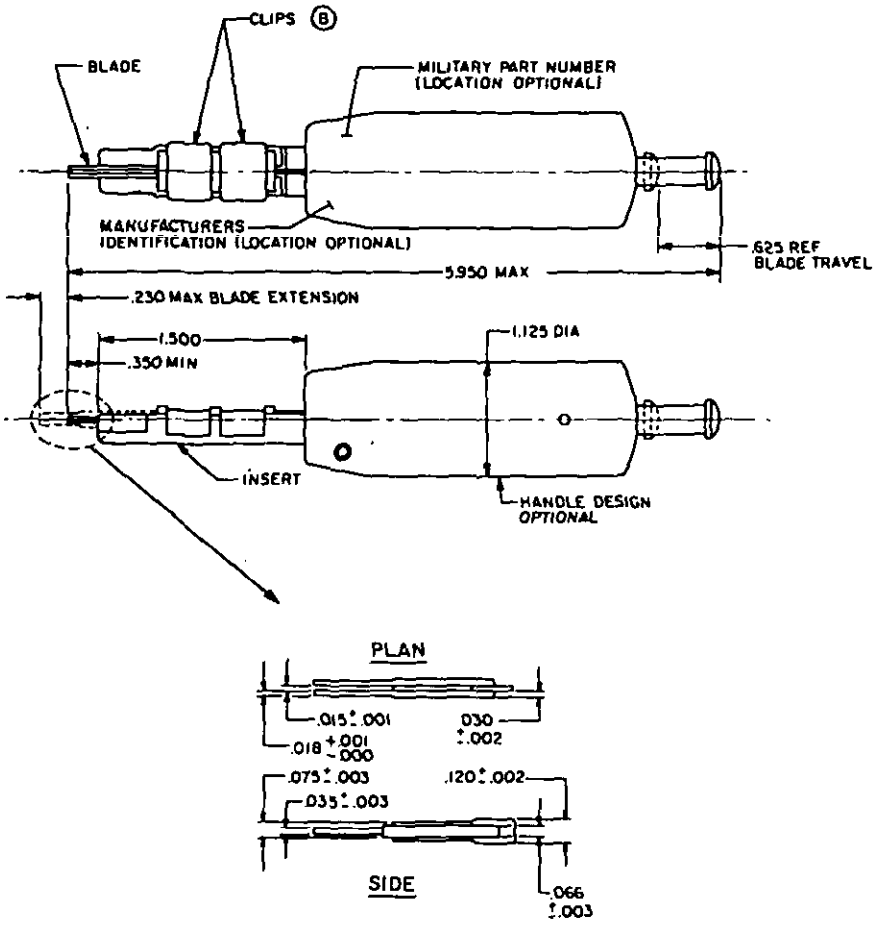


FIGURE 2. Removal tool, dash -02.

INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
.001	.03	.022	.56	.120	3.05	1.500	38.10
.002	.05	.030	.76	.230	5.84	5.950	151.13
.003	.08	.035	.89	.350	8.89		
.015	.38	.066	1.68	.625	15.88		
.018	.46	.075	1.90	1.125	28.58		

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Unless otherwise specified, tolerance is ±.015 inch (.38 mm).
4. The probe and plunger shall be permanently attached to the body of the tool, therefore, the tool is nonreparable.
5. Each tool shall be legibly and permanently marked on the handle in accordance with MIL-STD-130.

FIGURE 3. Metrics and notes for figure 1 and 2.

Source: https://assist.dla.mil -- Downloaded: 202610-23T06:30Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figures 1, 2 and 3.

Material:
Handle and insert: Styrene, high impact.
Blade: 1090 steel, spring tempered, Steel SAE 4130, AMS5643, AMS6370, 400 Series stainless steel or 300 maraging steel or suitable material, heat treated Rockwell C35-45.
Plating: For noncorrosion resistant steels, coat with electroless nickel to the requirements of MIL-C-26074, Class 1, (thickness .0002 to .0005). Hydrogen relief for 4 hours ±1 at 375°F ± 25°F, within 24 hours after coating, treat by immersion in a solution qualified under QPL-5541 to enhance resistance to corrosion and tarnish or nickel plating (Electrodeposited) in accordance with QQ-N-290, Class 2, (thickness .0002 to .0005).

Plunger force: 5 pounds, maximum.

Rotation: Not applicable.

Thrust: Not applicable.

Impact strength: Not applicable.

Part number: M81969/4-01
M81969/4-02

Application: These tools shall be used to remove contacts as follows:
Dash -01, contacts as specified in MIL-C-55302/93 thru /96, and MIL-C-55302/99 thru /104.
Dash -02, contacts as specified in MIL-C-28731/25 thru /36.

Supersession data: In addition to MIL-I-81969/4A, the following document is also superseded by this specification.

a. MIL-C-55302/106(EL), dated 30 May 1975.

The clip release prongs shall maintain alignment in order to prevent damage to the connector contact cavity.

The plunger shall self-return to its unused position.

Patent notice: Patent number 3,248,686 is owned by Elco Corporation. The Government has a royalty-free license under the above patent for the benefit of manufacturers of the items called for in this specification, either for the Government or for use in equipment to be delivered to the Government.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:30Z
Check the source to verify that this is the current version before use.

Custodians:
Army - CR
Navy - AS
Air Force - 85

Review activities:
Army - MI, AR, AT, GL
Navy - EC, SH, OS
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - ME, AV
Navy - MC, YD
Air Force - 19

Preparing activity:
Navy - AS
(Project No. 5120-B020)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:30Z
Check the source to verify that this is the current version before use.