MIL-M-81957/2A(AS)
9 October 1975
SUPERSEDING
MIL-M-81957/2(AS)
29 January 1974

MILITARY SPECIFICATION SHEET

MOBILE FACILITY, INTEGRATION UNIT

The complete requirements for procuring the Mobile Facility described herein shall consist of this document and the issue in effect of MIL-M-81957(AS)

REQUIREMENTS

1. Size - Nominal size of the Mobile Facility (hereinafter referred to as "The Unit") shall be 8 feet wide, 8 feet high by 20 feet long.

2. Weight Ratings

a. Tare weight - Tare weight of the unit shall not exceed 4,400 pounds.

b. Maximum payload - The unit shall be designed and constructed to operate with a maximum payload of 15,600 pounds.

c. Design gross weight (R) - The design gross weight (tare weight plus maximum payload) on which the structural design and testing are based shall be 20,000 pounds except that 44,800 pounds shall apply for stacking requirements.

d. Design load factors - The design load factors shall be in accordance with (American National Standard Institute) ANSI MH 5.1, except that all factors for Air-rotary wing shall be deleted.

3. Doors and removable panels - Two personnel doors with 48 inches wide by 76 inches high openings shall be provided, one located in the center of each end panel. In addition to the two personnel doors, three 48 inches wide by 76 inches high openings with removable panels shall be provided in the sides on the unit. One opening shall be located on the centerline of one side panel. The opposite side panel shall contain two openings, the centerline of each opening shall be located 72 inches from the centerline of the unit. The three removable panels shall be fabricated of the same materials as the wall panels, flush mounted, and easily released from the inside of the unit without the use of special tools. The locking device used to secure the panel in place shall be attached to the panel so that no part of the device is affixed to the unit shell when the panel is

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:29Z
Check the source to verify that this is the current version before use.

removed. The panels shall have complete gasketing, adequate to meet all requirements and tests of the basic specification. All door and panel openings shall be flush with the floor within 3/16 of an inch.

4. Butting kit - When specified in the contract or order butting kits shall be provided by the contractor. The butting kit will be used to enclose a passageway when two units are butted together end to end or to side. The butting kit shall be constructed of heavy duty, fire-resistant, oilproof, waterproof, opaque and thermal insulated materials. The butting kit shall be flexible enough to permit the two units to be separated by three (3) to ten (10) inchesand by four (4) inches off on the horizontal plane. The top surface of the butting kit shall be designed to prevent the accumulation of rain water. All securing devices, if used, shall be captivated and shall be large enough to be operated by personnel wearing arctic type gloves. If frames are used in the design of the butting kit, the frames shall contain sufficient gaskets and seals so that it will be watertight and prevent light transmission when secured to the unit.

5. Identification - The identification plate required by the basic specification shall be located near the lower left hand corner fitting on the side containing the single door.

6. Finish - The entire unit including all hardware (handles, hinges and screws, etc.) shall be given a protective finish in accordance with MIL-F-14072; except that the final coat shall be in accordance with the following:

a. Exterior - Exterior surfaces shall be glossy white, color 17875 per FED-STD-595, polyurethane per MIL-C-81773 applied over an epoxy primer in accordance with MIL-P-23377.

b. Interior - The ceiling shall be semi-gloss enamel in accordance with TT-E-529, color 27875 per FED-STD-595. The walls shall be Woodland Green semi-gloss enamel, Glidden Spred Luster.

7. Skids - Three (3) removable skids, three inches in height and three inches wide, shall be provided on the underside of the unit and located in accordance with Figure 1. The two outer skids shall each be equipped with four floating (± 1/4 inch) stainless steel, 5/8-11 UNC, captivated nuts located as shown in Figure 1. Both ends of each skid shall be welded closed. Each skid shall be of a length to permit them to be placed longitudinally inside the unit during transportation. The skids shall be capable of supporting the design gross weight of the unit and shall meet the interchangeability requirements of the general specification. The overall height of the unit, specified in ANSI MH 5.4, will be increased by three inches when the skids are installed as a result of this requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:29Z
Check the source to verify that this is the current version before use.

QUALITY ASSURANCE PROVISIONS

8. Butting kit leak test -

The butting kit leak test shall be conducted as follows:

(a) Position the two units so that they are separated by ten inches; and are four inches off the horizontal plane.

(b) Install a butting kit so as to connect the two units to each other.

(c) Using a one-half inch ID nozzle, having a minimum pressure at the nozzle of 15 PSIG, apply a stream of water to all sides of the butting kit from a distance of not greater then five feet for not less than one minute.

There shall be no penetration of water through the butting kit or the unit.

9. Skid bearing test - The unit loaded to the design gross weight shall be balanced on a two inch pipe located anywhere along the three skids. The skids shall experience no fractures or ruptures and no permanent deformation beyond 1/4 inch shall be permitted as a result of this test.

USER:
Navy - MC

Preparing Activity
Navy - AS
(Project No. 2330-N645)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:29Z
Check the source to verify that this is the current version before use.

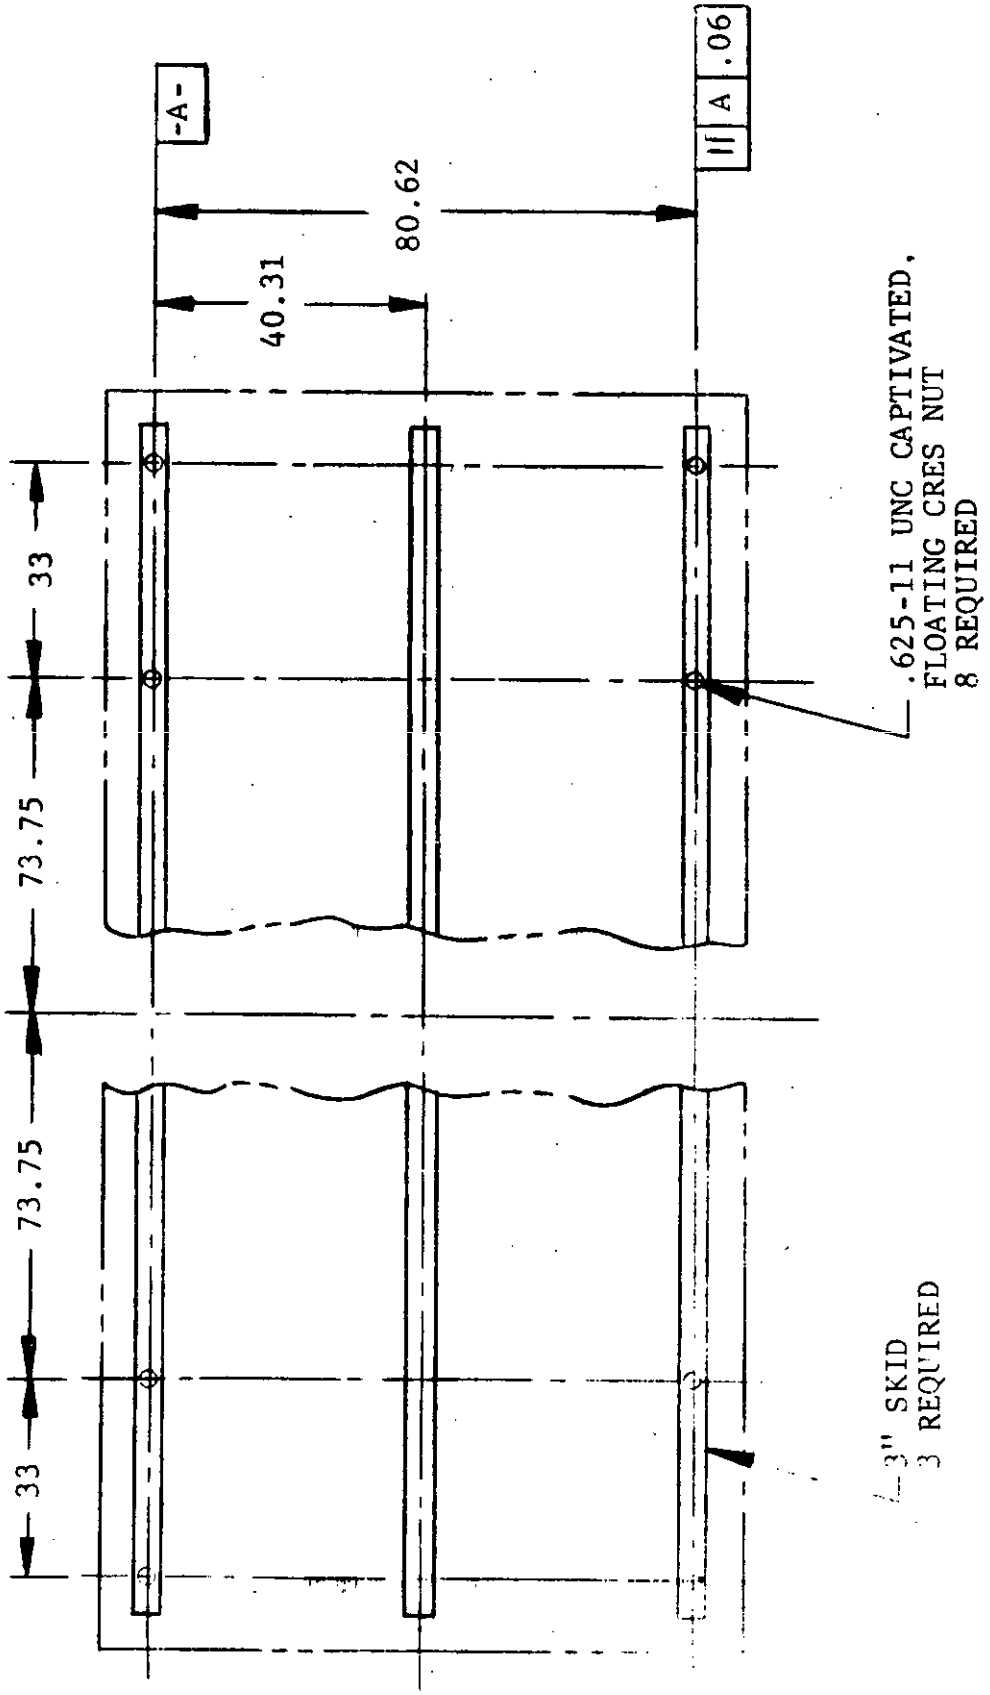


FIGURE 1. SKID LOCATION

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:29Z
Check the source to verify that this is the current version before use.