NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

AIR FORCE
NOTE: This drawing was approved by joint action of the [redacted] and Navy Departments as a Navy standard for this product. This drawing supersedes all antecedent standard drawings for this product. Upon the effective date of the procurement of commercial items, or the same product identified in this drawing, in accordance with the provisions of the Federal Acquisition Regulation, or other data is shown.

AIR FORCE
NOTE: This drawing supersedes all antecedent standard drawings for this product. Upon the effective date of the procurement of commercial items, or the same product identified in this drawing, in accordance with the provisions of the Federal Acquisition Regulation, or other data is shown. New designs not later than six months after the latest date of approval may be put into effect, at an earlier date after promulgation.

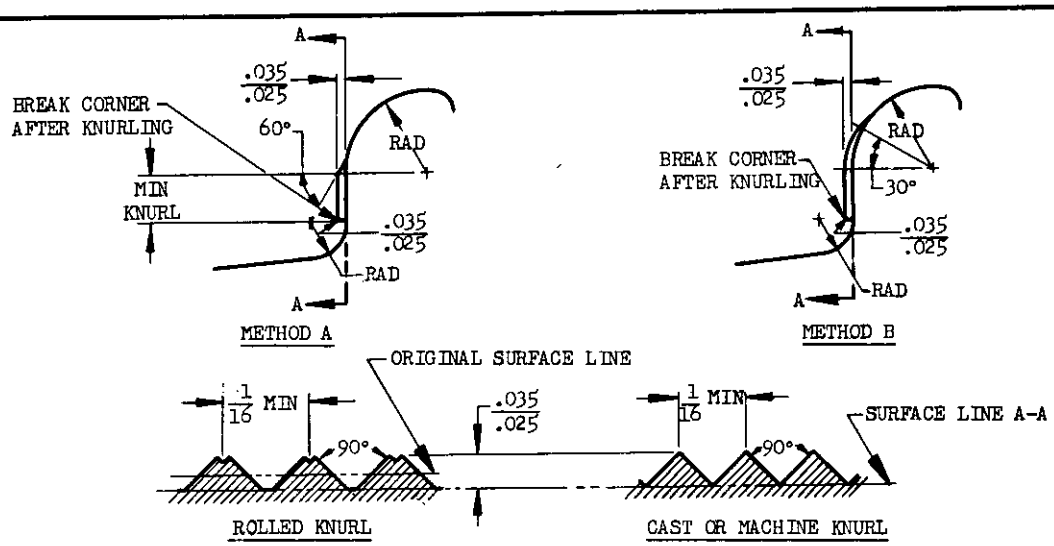

USE STRAIGHT OR COIN KNURL. RIDGES SHOULD BE SHARP, BUT NOT SHARP ENOUGH TO CUT TIRE. KNURL BOTH FLANGES.

Ⓐ **CANCELED** AFTER 9 MAY 1979 NO SUPERSEDING STANDARD

RIMS FOR TYPE III TIRES			RIMS FOR TYPE VII TIRES		
SIZE	METHOD	MIN KNURL	SIZE	METHOD	MIN KNURL
5.00-4	B	-	20 x 4.4	A	.188
8.00-4	B	-	22 x 5.5	A	.218
5.00-5	A	.188	24 x 5.5	A	.250
7.00-5	B	-	24 x 7.7	A	.188
8.00-5	B	-	26 x 6.6	A	.250
6.00-6	B	-	30 x 7.7	A	.250
7.00-6	B	-	32 x 8.8	A	.312
8.50-6	A	.188	34 x 9.9	A	.375
9.00-6	B	-	36 x 11	A	.437
10.00-7	B	-	38 x 11	A	.437
6.50-10	A	.125	40 x 12	A	.500
7.50-10	A	.125	42 x 12	A	.500
8.50-10	A	.125	44 x 13	A	.562
11.00-12	A	.156	46 x 14	A	.625
8.90-12.50	A	.625	52 x 16	A	.688
12.50-14	B	-	56 x 16	A	.688
15.00-16	A	.250	64 x 19	A	.688
16.00-16	B	-			
17.00-16	A OR B	-			
15.50-20	A	.500			
17.00-20	A	.500			
18.00-20	A	.688			
19.00-23	A OR B	.531			
25.00-28	A	.812			

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.005, ANGLES ±1/2°.

Ⓐ DENOTES CHANGE

APPROVED 8 Nov 49 REVISED Ⓐ 9 MAY 1979

AIR FORCE-NAVY AERONAUTICAL DESIGN STANDARD

KNURL DETAIL - AIRPLANE WHEEL RIM FLANGES

AND10599

NOT A PART NUMBER

☆U.S. GOVERNMENT PRINTING OFFICE: 1979—603-022/2199

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:30Z
Check the source to verify that this is the current version before use.