NOT MEASUREMENT SENSITIVE

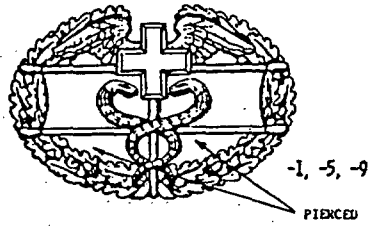
MIL-B-3628/27F
26 April 1991
SUPERSEDING
MIL-B-3628/27E
10 February 1988


MILITARY SPECIFICATION SHEET


Badge, Qualification, Combat Medical, Army

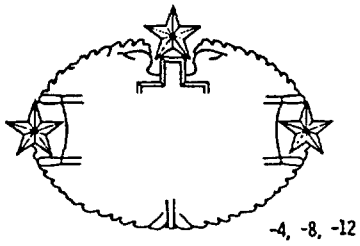
This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-B-3628.




DASH NO:

| | |
|---|---|
| -1: | Combat Medical, Basic, Regular size |
| -2: | Combat Medical, 2nd Award, Regular size |
| -3: | Combat Medical, 3rd Award, Regular size |
| -4: | Combat Medical, 4th Award, Regular size |
| -5: | Combat Medical, Basic, Dress Miniature |
| -6: | Combat Medical, 2nd Award, Dress Miniature |
| -7: | Combat Medical, 3rd Award, Dress Miniature |
| -8: | Combat Medical, 4th Award, Dress Miniature |
| -9: | Combat Medical, Basic Regular size, subdued |
| -10: | Combat Medical, 2nd Award Regular size, subdued |
| -11: | Combat Medical, 3rd Award Regular size, subdued |
| -12: | Combat Medical, 4th Award Regular size, subdued |

MATERIAL: Red brass or nickel silver

DIMENSIONS:
HEIGHT (Overall):

| | |
|---|---|
| -1,-9: | 1 inch (2.54 cm) (REF) |
| -2,-4,-10,-12: | 1-7/32 inch (3.1 cm) (REF) |
| -3,-11: | 1-13/32 inch (3.57 cm) (REF) |
| -5: | 19/32 inch (1.51 cm) (REF) |
| -6,-8: | 13/16 inch (2.06 cm) (REF) |
| -7: | 25/32 inch (1.98 cm) (REF) |

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.



Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:56Z
Check the source to verify that this is the current version before use.

WIDTH (Overall):
1,-2,-3,-9,-10,-11: 1-1/2 inch (3.81 cm) (REF)
-4,-12: 1-13/16 inch (4.6 cm) (REF)
-5,-6,-7: 7/8 inch (2.22 cm) (REF)
-8: 1 inch (2.54 cm) (REF)
THICKNESS (At center cross):
-1 thru -4, -9 thru -12: .095 inch ± .005 inch (0.241 cm ± 0.012 cm)
-5 thru -8: .065 inch ± .005 inch (0.165 cm ± 0.012 cm)

FINISH:
-1 thru -8: Nickel plated (red brass only), silver plated, oxidized, relieved, matte finish
-9 thru -12: Dull, flat black enamel finish

NOTES:
1. The attaching device shall be prong and clutch type. Prongs shall be located on the horizontal centerline, equidstant from each end and 1 inch ± 1/32 ± (2.54 cm ± 0.08 cm) apart for regular size badges and 3/4 inch ± 1/32 inch (1.91 cm ± 0.08 cm) apart for dress miniature badges.

2. Pierced areas shown are required on all badges.

3. Dash No. 1 thru 8 may be nickel or rhodium plated with a mirror-like polished finish for commercial sale except the silver plating requirements shall not apply.

Custodians:
Army - IH
Air Force - 11

Review Activity:
Air Force - 82,99
DLA - CT

User Activity:
Air Force - 45

Preparing Activity:
Army - IH

(Projected No. 8455-0586)



Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:56Z
Check the source to verify that this is the current version before use.