NOT MEASUREMENT SENSITIVE

MIL-DTL-3628/27H
15 November 1996
SUPERSEDING
MIL-B-3628/27G
30 July 1993

DETAIL SPECIFICATION SHEET

BADGE, QUALIFICATION, COMBAT MEDICAL, ARMY

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-3628 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

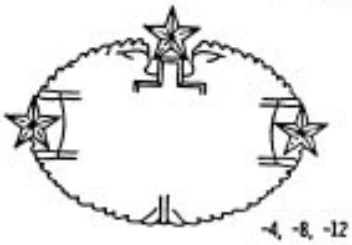

DASH NO.

-1:	Combat Medical, Basic, Regular Size
-2:	Combat Medical, 2nd Award, Regular Size
-3:	Combat Medical, 3rd Award, Regular Size
-4:	Combat Medical, 4th Award, Regular Size
-5:	Combat Medical, Basic, Dress Miniature Size
-6:	Combat Medical, 2nd Award, Dress Miniature Size
-7:	Combat Medical, 3rd Award, Dress Miniature Size
-8:	Combat Medical, 4th Award, Dress Miniature Size
-9:	Combat Medical, Basic, Regular Size, Subdued
-10:	Combat Medical, 2nd Award, Regular Size, Subdued
-11:	Combat Medical, 3rd Award, Regular Size, Subdued
-12:	Combat Medical, 4th Award, Regular Size, Subdued

MATERIAL: Red Brass or Nickel Silver

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:56Z
Check the source to verify that this is the current version before use.

FINISH:
-1 Thru -8: Nickel Plated (Red Brass only), Silver Plated, Oxidized, Relieved, Matte Finish and shall match TIOH Metal Finish Chip Number 14.
-9 Thru -12: Dull, Flat Black Enamel Finish.

DIMENSIONS:
HEIGHT (Overall):

-1, -9:	1 inch (2.54 cm) (REF)
-2, -4, -10, -12:	1-7/32 inches (3.10 cm) (REF)
-3, -11:	1-13/32 inches (3.57 cm) (REF)
-5:	19/32 inch (1.51 cm) (REF)
-6, -8:	13/16 inch (2.06 cm) (REF)
-7:	25/32 inch (1.98 cm) (REF)

WIDTH (Overall):

-1, -2, -3, -9, -10, -11:	1-1/2 inches (3.81 cm) (REF)
-4, -12:	1-13/16 inches (4.60 cm) (REF)
-5, -6, -7:	7/8 inch (2.22 cm) (REF)
-8:	1 inch (2.54 cm) (REF)

THICKNESS (At Center Cross):

-1 thru 4, -9 thru -12:	0.095 inch $\pm$ 0.005 inch (0.241 cm $\pm$ 0.012 cm)
-5 thru -8:	0.065 inch $\pm$ 0.005 inch (0.254 cm $\pm$ 0.012 cm)

NOTES:
1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Piercing shall be as indicated and are required on all badges.

3. The dull, flat black enamel for Dash -9 through -12 shall match FED-STD-595 Number 37038.

4. The attaching device shall be prong and clutch type. The prongs shall be located on the horizontal center line equidistant from each end and 1 inch $\pm$ 1/32 inch (2.54 cm $\pm$ 0.08 cm) apart for regular size badges and 3/4 inch $\pm$ 1/32 inch (1.91 cm $\pm$ 0.08 cm) apart for dress miniature size badges.

4. Dash No. -1 through -8 may be nickel or rhodium plated with a mirror-like polished finish which shall match TIOH Metal Finish Chip Number 16 for commercial sale only. For nickel or rhodium plated items, the silver plating requirements shall not apply.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activities:
DLA - CT

(Project No. 8455-0864)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:56Z
Check the source to verify that this is the current version before use.