INCH-POUND


MIL-DTL-3628/27J
05 November 2012
SUPERSEDING
MIL-DTL-3628/26H
15 November 1996

DETAIL SPECIFICATION SHEET

BADGE,QUALIFICATION COMBAT MEDICAL BADGES, U. S. ARMY

This specification is approved for use by all
Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-3628.

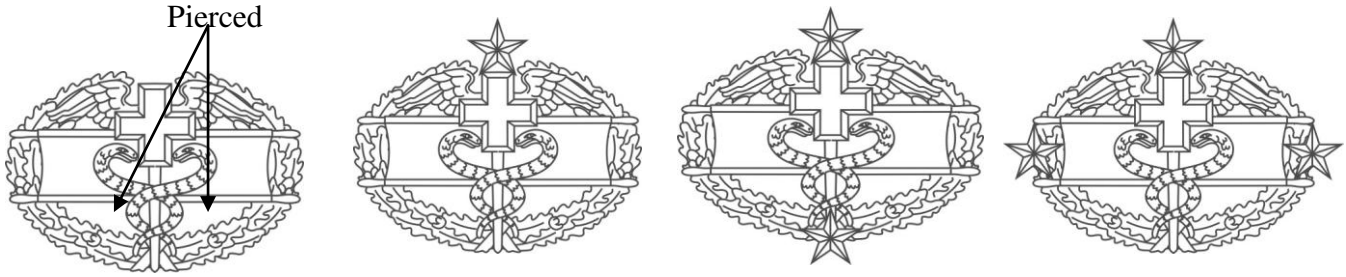

First Award
-1, -5, -9

Second Award
-2, -6, -10

Third Award
-3, -7, -11

Fourth Award
-4, -8, -12

DASH NUMBERS:

-1 Combat Medical, Basic, Regular Size

-2 Combat Medical, 2nd Award, Regular Size

-3 Combat Medical, 3rd Award, Regular Size

-4 Combat Medical, 4th Award, Regular Size

-5 Combat Medical, Basic, Dress Miniature Size

-6 Combat Medical, 2nd Award, Dress Miniature Size

-7 Combat Medical, 3rd Award, Dress Miniature Size

-8 Combat Medical, 4th Award, Dress Miniature Size

-9 Combat Medical, Basic, Regular Size, Subdued

-10 Combat Medical, 2nd Award, Regular Size, Subdued

-11 Combat Medical, 3rd Award, Regular Size, Subdued

-12 Combat Medical, 4th Award, Regular Size, Subdued

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:56Z
Check the source to verify that this is the current version before use.

MATERIAL: Red Brass 85/15 (UNS Alloy No. C-230) or Nickel Silver (UNS Alloy No.C-752):

FINISH: 1: (-1 through -8): Nickel plated (Red Brass Only), Silver Plated, Oxidized, Relieved, Matte Finish and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 14.

2: (-9 through -12): Dull, Flat Black and shall match TIOH Metal Finish Chip Number 21.

DIMENSIONS:

HEIGHT (Overall):

-1, -9: 1 inch (REF)

-2, -4, -10, -12: 1-7/32 inches (REF)

-3, -11:1-13/32 inches (REF)

-5: 19/32 inch (REF)

-6, -8: 13/16 inch (REF)

-7: 25/32 inch (REF)

WIDTH (Overall):

-1, -2, -3, -9, -10, -11: 1-1/2 inches (REF)

-4, -12:1-13/16 inch (REF)

-5, -6, -7: 7/8 inch (REF)

-8: 1 inch (REF)

THICKNESS: (At center cross)

-1 thru -4, -9 thru -12: 0.095 inch $\pm$ .010 inch

-5 thru -8: 0.065 inch $\pm$ .010 inch

PIERCING AND ATTACHING DEVICE:

1. Piercing shall be as indicated and are required on all badges.

2. The attaching device shall be prong and clutch type.

3. The prongs shall be located on the horizontal center line equidistant from each end and 1 inch $\pm$ 1/32 inch apart for regular size badges and 3/4 inch $\pm$ 1/32 inch apart for dress miniature size badges.

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. -1 through -8 may be nickel or rhodium plated with a mirror-like polished finish which shall match TIOH Metal Finish Chip Number 16 for commercial sale only. For nickel or rhodium plated items, the silver plating requirements shall not apply.

CHANGES FROM PREVIOUS ISSUE: The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:56Z
Check the source to verify that this is the current version before use.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-2012-156)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:56Z
Check the source to verify that this is the current version before use.