
MIL-B-3628 / 28E
10 February 1988
SUPERSEDING
MIL-B-3628 / 28D
27 December 1984


MILITARY SPECIFICATION SHEET


BADGE, QUALIFICATION, MISSILEMAN, AIR FORCE

This specification is approved for use by all Departments and Agencies of the Department of Defense. The complete requirements for procuring the item(s) described herein shall consist of this document and the issue in effect of Specification MIL-B-3628.

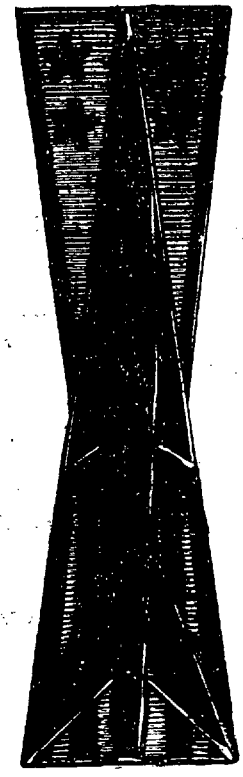

-1, -4



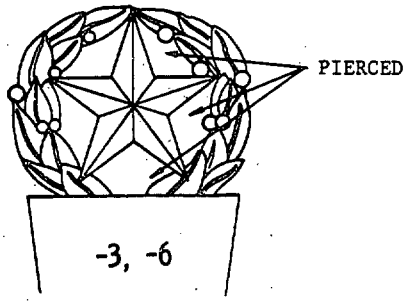

DASH NOS:
- -1: MISSILEMAN, REGULAR SIZE
- -2: SENIOR MISSILEMAN, REGULAR SIZE
- -3: MASTER MISSILEMAN, REGULAR SIZE
- -4: MISSILEMAN, MINIATURE SIZE
- -5: SENIOR MISSILEMAN, MINIATURE SIZE
- -6: MASTER MISSILEMAN, MINIATURE SIZE

MATERIAL: RED BRASS OR NICKEL SILVER

DIMENSIONS (INCHES):

HEIGHT (OVERALL):
- -1: 2-1/2 (REF)
- -2: 3 (REF)
- -3: 3-1/8 (REF)
- -4: 1-25/32 (REF)
- -5: 2-1/8 (REF)
- -6: 2-1/4 (REF)

WIDTH (OVERALL):
- -1,-2,-3: 3/4 (REF)
- -4,-5,-6: 17/32 (REF)

ASSEMBLED THICKNESS:
- -1,-2,-3: .200 ± .010
- -4,-5,-6: .165 ± .010

THICKNESS AT EDGE:
- -1,-2,-3: .075 ± .005
- -4,-5,-6: .063 ± .005

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:57Z
Check the source to verify that this is the current version before use.

FINISH: NICKEL PLATED (RED BRASS ONLY), SILVER PLATED
BASE: OXIDIZED, RELIEVED, HIGHLIGHTS, SATIN FINISH, REVERSE AND EDGES CLEAN
MISSILE: SATIN FINISH, REVERSE AND EDGES CLEAN

NOTES:

1. BADGES MAY BE MADE FROM STERLING SILVER FOR COMMERCIAL SALE AND IF SO THE THICKNESS DIMENSIONS GIVEN SHALL BE USED FOR REFERENCE ONLY AND THE WEIGHTS SPECIFIED BELOW SHALL GOVERN. THE FINISH FOR STERLING SILVER BADGES SHALL BE AS SPECIFIED EXCEPT THE REQUIREMENT FOR SILVER PLATING SHALL NOT APPLY.

WEIGHT (MINIMUM):			
-1:	250 GRAINS	-4:	165 GRAINS
-2:	270 GRAINS	-5:	180 GRAINS
-3:	315 GRAINS	-6:	200 GRAINS

2. THE MISSILE FOR THE REGULAR SIZE BADGES (-1,-2,-3) SHALL BE SUPERIMPOSED AND SECURED TO THE BASE BY MEANS OF TWO HOLLOW RIVETS (REGULAR SIZE BADGES ONLY.) THE RIVETS SHALL BE LOCATED ON THE VERTICAL CENTERLINE OF THE MISSILE EQUIDISTANT FROM EACH END. THE DISTANCE CENTER TO CENTER OF THE RIVETS SHALL 1 ± 1/16 INCH. THE MISSILE FOR THE MINIATURE SIZE BADGES (-4,-5,-6) SHALL BE SUPERIMPOSED AND SECURED TO THE BASE BY MEANS OF ONE HOLLOW RIVET. ONE RIVET ONLY WILL BE CENTERED ON THE BADGE. THE RIVET SHALL BE LOCATED ON THE VERTICAL CENTERLINE OF THE MISSILE EQUIDISTANCE FROM EACH END.

3. A FORCER MAY BE USED TO BRING UP THE MISSILE, STAR AND WREATH. WHEN A FORCER IS USED TO BRING UP THE STAR, THE PRONG LOCATED AT THE CENTER OF THE STAR SHALL HAVE A FREE LENGTH OF 5/16 INCH WHEN MEASURED FROM THE BACK OF THE BADGE TO THE TIP OF THE PRONG.

4. ATTACHING DEVICE SHALL BE PRONG AND CLUTCH TYPE. THE PRONGS SHALL BE LOCATED ON THE VERTICAL CENTERLINE OF THE BADGE. PRONGS FOR DASH NOS. 1 AND 4 SHALL BE EQUIDISTANT FROM EACH END OF THE BADGE WITH THE PRONGS 2 ± 1/64 INCH ON CENTERS FOR DASH NO. 1 AND 1-3/8 ± 1/64 INCH ON CENTERS FOR DASH NO.4. PRONGS FOR DASH NOS. 2 AND 3 SHALL BE LOCATED WITH THE TOP PRONG CENTERED ON THE STAR AND THE LOWER PRONG 1/4 ± 1/64 INCH FROM THE BOTTOM OF THE BADGE. THE PRONGS FOR DASH NOS. 5 AND 6 SHALL BE LOCATED WITH THE TOP PRONG CENTERED ON THE STAR AND THE LOWER PRONG 3/16 ± 1/64 INCH FROM THE BOTTOM OF THE BADGE.

5. THE MISSILE AND THE BASE SHALL BE LACQUERED PRIOR TO ASSEMBLY. AFTER ASSEMBLY THE BADGE SHALL BE LACQUERED AGAIN.

6. BADGES MAY BE RHODIUM PLATED FOR COMMERCIAL SALE.

Custodian:
Army - IH
Air Force - 11

Review activities:
Air Force - 82,99
DLA - CT

User activities:
Air Force - 45

Preparing activity:
Army - IH

(Project No. 8455-0268)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:57Z
Check the source to verify that this is the current version before use.