NOT MEASUREMENT SENSITIVE


MIL-B-3628/28F
14 September 1990
SUPERSEDING
MIL-B-3628/28E
10 February 1988

MILITARY SPECIFICATION SHEET

BADGE, QUALIFICATION, MISSILEMAN, AIR FORCE

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-B-3628.

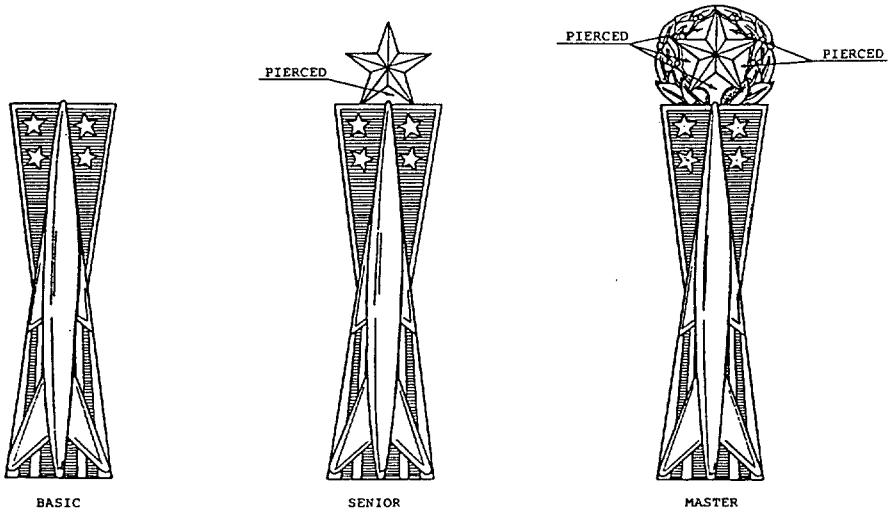

DASH NO:
-1: Basic Missileman, Regular Size
-2: Senior Missileman, Regular Size
-3: Master Missileman, Regular Size
-4: Basic Missileman, Miniature Size
-5: Senior Missileman, Miniature Size
-6: Master Missileman, Miniature Size

MATERIAL: Red brass or nickel silver

DIMENSIONS:
HEIGHT (Overall):
-1: 2-1/2 inches (6.35 cm) (REF)
-2: 3 inches (7.62 cm) (REF)
-3: 3-1/8 inches (7.94 cm) (REF)
-4: 1-25/32 inches (4.52 cm) (REF)
-5: 2-1/8 inches (5.40 cm) (REF)
-6: 2-1/4 inches (3.72 cm) (REF)

WIDTH (Overall):
-1,-2,-3: 3/4 inch (1.91 cm) (REF)
-4,-5,-6: 17/32 inch (1.35 cm) (REF)

THICKNESS (Assembled):
-1,-2,-3: .200 inch ± .010 inch (0.508 cm ± 0.025 cm)
-4,-5,-6: .165 inch ± .010 inch (0.419 cm ± 0.025 cm)

THICKNESS (At edge):
-1,-2,-3: .075 inch ± .005 inch (0.190 cm ± 0.012 cm)
-4,-5,-6: .063 inch ± .005 inch (0.160 cm ± 0.012 cm)

FINISH: Nickel plated (red brass only), silver plated
BASE: Oxidized, relieved, matte finish
MISSILE: Matte finish

AMSC N/A
FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:57Z
Check the source to verify that this is the current version before use.

NOTES:

1. The missile for regular size badges (Dash No. 1, 2 and 3) shall be superimposed and secured to the base by two hollow rivets. The rivets shall be located on the vertical centerline of the missile, equidistance from each end and 1 inch ± 1/16 inch (2.54 cm ± 0.16 cm) apart. The missile for miniature size badges (Dash No 4, 5 and 6) shall be superimposed and secured to the base by one hollow rivet. The rivet shall be centered on the vertical centerline of the missile.

2. A forcer may be used to bring up the missile, star and wreath. When a forcer is used to bring up the star, the prong located at the center of the star shall have a free length of 5/16 inch when measured from the back of the badge to the tip of the prong.

3. Attaching device shall be prong and clutch type located as follows:

   a. Dash No. 1 and 4: The prongs shall be located on the vertical centerline of the badge, equidistance from each end and 2 inches ± 1/64 inch (5.08 cm ± 0.04 cm) apart for Dash No. 1 and 1-3/8 inch ± 1/64 inch (3.49 cm ± 0.04 cm) apart for Dash No. 4.

   b. Dash No. 2 and 3: The prongs shall be located on the vertical centerline of the badge with the top prong centered on the star and the lower prong 1/4 inch ± 1/64 inch (0.64 cm ± 0.04 cm) from the bottom of the badge.

   c. Dash No. 5 and 6: The prongs shall be located on the vertical centerline of the badge with the top prong centered on the star and the lower prong 3/16 inch ± 1/64 inch (0.48 cm ± 0.04 cm) from the bottom of the badge.

4. The missile and base shall be lacquered prior to assembly. After asembly the badge shall be lacquered again.

5. Badges may be nickel or rhodium plated with a mirror-like polished finish for commercial sale.

Custodian:
Army - IH
Air Force - 11

Preparing activity:
Army - IH

Review activities:
Air Force - 82,99
DLA - CT

(Project No. 8455-0536)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:57Z
Check the source to verify that this is the current version before use.