NOT MEASUREMENT SENSITIVE

MIL-DTL-3628/28J
15 November 1996
SUPERSEDING
MIL-B-3628/28H
30 July 1993

DETAIL SPECIFICATION SHEET

BADGE, OCCUPATIONAL, MISSILEMAN, AIR FORCE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-3628 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

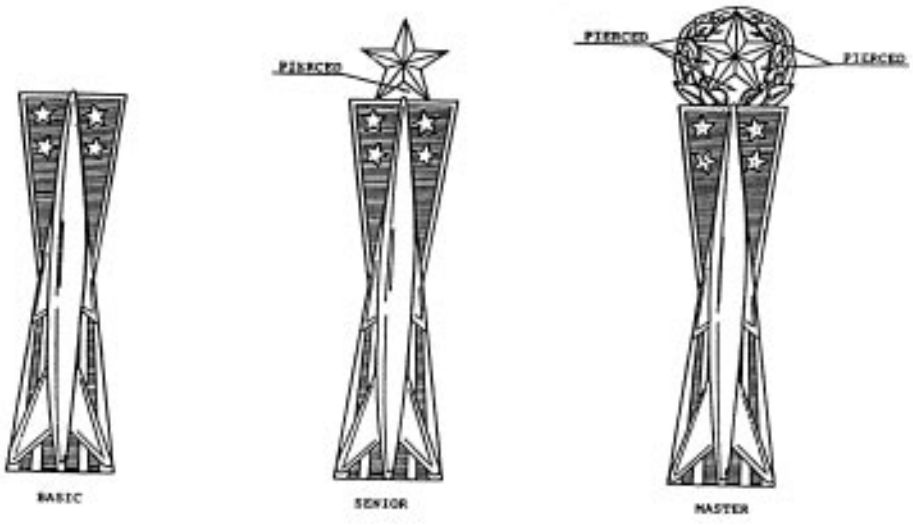

DASH NO.
-1: Basic, Missileman, Regular Size
-2: Senior, Missileman, Regular Size
-3: Master, Missileman, Regular Size
-4: Basic, Missileman, Miniature Size
-5: Senior, Missileman, Miniature Size
6. Master, Missileman, Miniature Size

MATERIAL: Red Brass or Nickel Silver

FINISH: Nickel Plated, Mirror-like Polished and shall match TIOH Metal Finish Chip Number 16.

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:57Z
Check the source to verify that this is the current version before use.

DIMENSIONS:

HEIGHT (Overall):		
	-1:	2-1/2 inches (6.35 cm) (REF)
	-2:	3 inches (7.62 cm) (REF)
	-3:	3-1/8 inches (7.94 cm) (REF)
	-4:	1-25/32 inches (4.52 cm) (REF)
	-5:	2-1/8 inches (5.40 cm) (REF)
	-6:	2-1/4 inches (5.72 cm) (REF)
WIDTH (Overall):		
	-1, -2, -3:	3/4 inch (1.91 cm) (REF)
	-4, -5, -6:	17/32 inch (1.35 cm) (REF)
THICKNESS (Assembled):		
	-1, -2, -3:	0.200 inch ± 0.010 inch (0.508 cm ± 0.025 cm)
	-4, -5, -6:	0.165 inch ± 0.010 inch (0.419 cm ± 0.025 cm)
THICKNESS (At Edge):		
	-1, -2, -3:	0.075 inch ± 0.005 inch (0.160 cm ± 0.012 cm)
	-4, -5, -6:	0.063 inch ± 0.005 inch (0.160 cm ± 0.012 cm)

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Piercing shall be as indicated.

3. The missile for the regular size badges (Dash No. -1, -2, and -3) shall be superimposed and secured to the base by two hollow rivets. The rivets shall be located on the vertical center line of the missile, equidistant from each end and 1 inch ± 1/16 inch (2.54 cm ± 0.16 cm) apart. The missile for miniature size badges (Dash No. -4, -5, and -6) shall be superimposed and secured to the base by one hollow rivet. The rivet shall be centered on the vertical center line of the missile.

4. A forcer may be used to bring up the missile, star and wreath. When a forcer is used to bring up the star, the prong located at the center of the star shall be a free length of 5/16 ± 1/64 inch inch (0.79 cm ± 0.04 cm) when measured from the back of the badge to the tip of the prong.

5. Attaching device shall be prong and clutch type located as follows:

a. Dash No. -1 and -4: The prongs shall be located on the vertical center line of the badge, equidistant from each end and 2 inches ± 1/64 inch (5.08 cm ± 0.04 cm) apart for Dash No. -1 and 1-3/8 inch ± 1/64 inch (3.49 cm ± 0.04 cm) apart for Dash No. -4.

b. Dash No. -2 and -3: The prongs shall be located on the vertical center line of the badge with the top prong centered on the star and the lower prong 1/4 inch ± 1/64 inch (0.64 cm ± 0.04 cm) from the bottom of the badge.

c. Dash No. -5 and -6: The prongs shall be located on the vertical center line of the badge with the top prong centered on the star and the lower prong 3/16 inch ± 1/64 inch (0.48 cm ± 0.04 cm) from the bottom of the badge.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:57Z
Check the source to verify that this is the current version before use.

Custodian:
Army - IH
Air Force - 45

Review activities:
Air Force - 32, 82, 99
DLA - CT

Preparing activity:
Army - IH

(Project No. 8455-0864)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:57Z
Check the source to verify that this is the current version before use.