NOT MEASUREMENT SENSITIVE


MIL-B-3628/30F
14 September 1990
SUPERSEDING
MIL-B-3628/30E
10 February 1988

MILITARY SPECIFICATION SHEET

BADGE, QUALIFICATION, PARACHUTIST, ARMY, NAVY, MARINE CORPS AND AIR FORCE, SENIOR AND MASTER PARACHUTIST, ARMY AND AIR FORCE

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-B-3628.

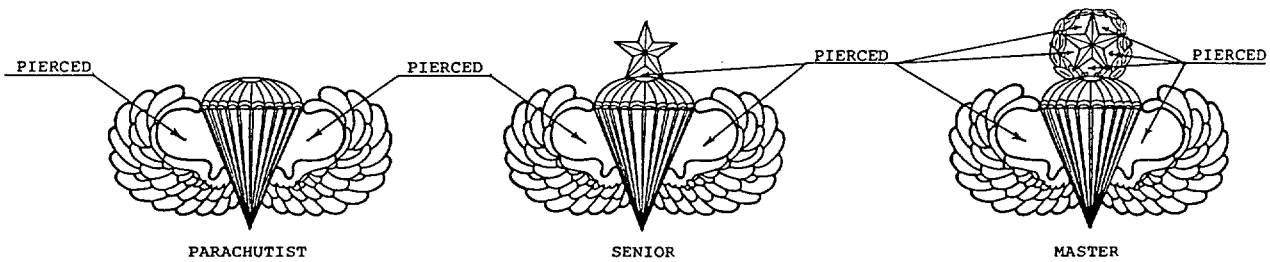

DASH NO:
- -1: Master Parachutist, Regular Size (A, AF)
- -2: Senior Parachutist, Regular Size (A, AF)
- -3: Parachutist, Regular Size (A, AF, N, MC)
- -4: Master Parachutist, Dress Miniature (A, AF)
- -5: Senior Parachutist, Dress Miniature (A, AF)
- -6: Parachutist, Dress Miniature (A, AF)
- -7: Master Parachutist, Regular Size, Subdued (A)
- -8: Senior Parachutist, Regular Size, Subdued (A)
- -9: Parachutist, Regular Size, Subdued (A)

MATERIAL: Red brass or nickel silver

DIMENSIONS:

HEIGHT (Overall):
- -1,-7: 1-13/64 inch (3.06 cm) (REF)
- -1,-8: 1-3/32 inch (2.78 cm) (REF)
- -3,-9: 13/16 inch (2.06 cm) (REF)
- -4: 13/16 inch (2.06 cm) (REF)
- -5: 5/8 inch (1.59 cm) (REF)
- -6: 15/32 inch (1.19 cm) (REF)

WIDTH (Overall):
- -1,-2,-3,-7,-8,-9: 1-1/2 inches (3.81 cm) (REF)
- -4,-5,-6: 7/8 inch (2.22 cm) (REF)

THICKNESS (At thickest point of wings):
- -1,-2,-3,-7,-8,-9: .095 inch $\pm$ .005 (0.241 cm $\pm$ 0.012 cm)
- -4,-5,-6: .070 inch $\pm$ .005 (0.177 cm $\pm$ 0.012 cm)

FINISH:
- -1 thru -6: Nickel plated, silver plated, oxidized, relieved, matte finish.
- -7,-8,-9: Dull flat black enamel.

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:57Z
Check the source to verify that this is the current version before use.

NOTES:
1. Attaching device shall be prong and clutch type. Prongs shall be located at each intersection of the horizontal centerline of the badge and the center of the wings.
2. A forcer may be used on the form of the parachute, the star and the star and wreath.
3. Piercing shall be as shown. Piercing around the star applies to regular size badges only.
4. Dash numbers 1 thru 6 may be nickel or rhodium plated with a mirror-like polished finish for commercial sale for Air Force use only.

Custodians:
Army - IH
Air Force - 11
Navy - NU

Preparing activity:
Army - IH

Review activities:
Air Force - 82,99
Navy - MC
DLA - CT

(Project No. 8455-0536)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:57Z
Check the source to verify that this is the current version before use.