NOT MEASUREMENT SENSITIVE


MIL-B-3628/30H
13 September 1991
SUPERSEDING
MIL-B-3628/30G
26 April 1991

MILITARY SPECIFICATION SHEET

Badge, Qualification, Parachutist, Army, Navy, Marine Corps and Air Force
Senior and Master Parachutist, Army and Air Force

This specification is approved for use by all Departments and Agencies
of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-B-3628.

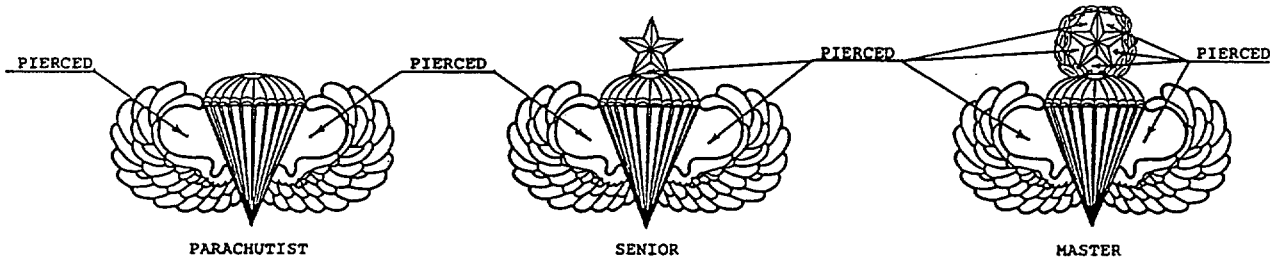

DASH NO:
-1: Master Parachutist, Regular Size (A,AF)
-2: Senior Parachutist, Regular Size (A,AF)
-3: Parachutist, Regular Size (A,AF,N,MC)
-4: Master Parachutist, Dress Miniature (A)
-5: Senior Parachutist, Dress Miniature (A)
-6: Parachutist, Dress Miniature (A)
-7: Master Parachutist, Regular Size Subdued (A)
-8: Senior Parachutist, Regular Size Subdued (A)
-9: Parachutist, Regular Size Subdued (A)

MATERIAL: Red brass or nickel silver

DIMENSIONS:
HEIGHT (Overall):
-1,-7: 1-13/64 inch (3.06 cm) (REF)
-2,-8: 1-3/32 inch (2.78 cm) (REF)
-3,-9: 13/16 inch (2.06 cm) (REF)
-4: 13/16 inch (2.06 cm) (REF)
-5: 5/8 inch (1.59 cm) (REF)
-6: 15/32 inch (1.19 cm) (REF)
WIDTH (Overall):
-1,-2,-3,-7,-8,-9: 1-1/2 inches (3.81 cm) (REF)
-4,-5,-6: 7/8 inch (2.22 cm) (REF)

AMSC N/A
FSC 8455
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:57Z
Check the source to verify that this is the current version before use.

THICKNESS (At thickest point of wings):
-1,-2,-3,-7,-8,-9: .095 inch ± .005 inch (0.241 cm ± 0.012 cm)
-4, 5,-6: .070 inch ± .005 inch (0.177 cm ± 0.012 cm)

FINISH:
-1 thru -6:
AIR FORCE: Nickel plated, mirror-like polished
ARMY, NAVY, MARINE CORPS: Nickel plated (red brass only), silver plated, oxidized, relieved, matte finish
-7 thru -9: Dull, flat black enamel

NOTES:
1. The attaching device shall be prong and clutch type. Prongs shall be located at each intersection of the horizontal centerline of the badge and the center of the wings.
2. A forcer may be used on the form of the parachute, the star and the star and wreath.
3. Piercing shall be as shown. Piercing around the star applies to regular size badges only.
4. Dash numbers 1 thru 6 may be nickel or rhodium plated with a mirror-like polished finish for commercial sale for Army use only.

Custodians:
Army - IH
Navy - NU
Air Force - 11

Preparing activity:
Army - IH

Review activities:
Navy - MC
Air Force - 82,99
DLA - CT

(Project No. 8455-N614)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:57Z
Check the source to verify that this is the current version before use.