NOT MEASUREMENT SENSITIVE


MIL-DTL-3628/30N
18 November 2020
SUPERSEDING
MIL-DTL-3628/30M
12 January 2016

DETAIL SPECIFICATION SHEET

BADGE, QUALIFICATION, PARACHUTIST, ARMY, NAVY, MARINE CORPS, AND AIR FORCE; SENIOR AND MASTER PARACHUTIST, ARMY AND AIR FORCE

This specification is approved for use by all
Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-3628.

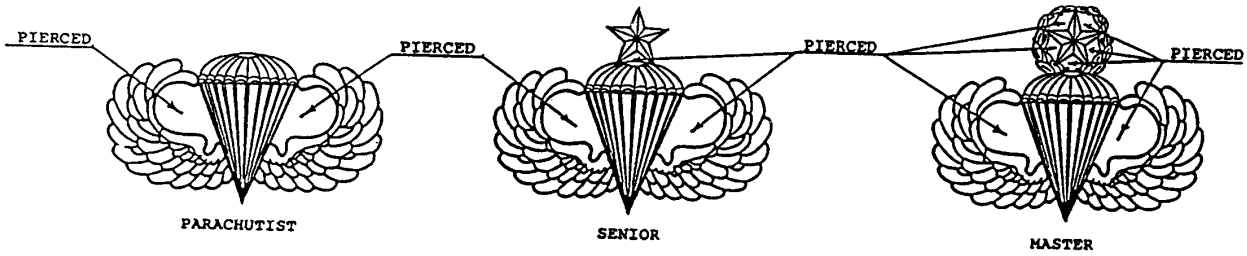

DASH NO.
-1: Master Parachutist, Regular Size (A, AF)
-2: Senior Parachutist, Regular Size (A, AF)
-3: Parachutist, Regular Size (A, AF, N, MC)
-4: Master Parachutist, Dress Miniature Size (A)
-5: Senior Parachutist, Dress Miniature Size (A)
-6: Parachutist, Dress Miniature Size (A)
-7: Master Parachutist, Regular Size, Subdued (A)
- 8: Senior Parachutist, Regular Size, Subdued (A)
-9: Parachutist, Regular Size, Subdued (A)
-10: Master Parachutist, Mid Size (AF)
-11: Senior Parachutist, Mid Size (AF)
-12: Parachutist, Mid Size (AF)

MATERIAL: Red Brass 85/15 (UNS Alloy No. C-230), Nickel Silver 65/35 (UNS Alloy No. C752), or Zinc Aluminum

FINISH:
-1, -2, -3, -4, -5, -6, -10, 11, and -12: Nickel plated, Mirror-like Polished and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 16.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:57Z
Check the source to verify that this is the current version before use.

-7, -8, and -9: Dull, Flat Black Enamel Finish and shall match TIOH Metal Finish Chip Number 21.

DIMENSIONS:

HEIGHT (Overall):

-1, -7: 1-13/64 inches (REF)
-2, -8: 1-3/32 inches (REF)
-3, -9: 13/16 inch (REF)
-4: 13/16 inch (REF)
-5: 5/8 inch (REF)
-6: 15/32 inch (REF)
-10: 57/64 inch (REF)
-11: 53/64 inch (REF)
-12: 39/64 inch (REF)

WIDTH (Overall):

-1, -2, -3, -7, -8, and -9: 1-1/2 inches (REF)
-4, -5, and -6: 7/8 inch (REF)
10, -11, and -12: 1-7/32 inch (REF)

THICKNESS (at thickest point of wings):

-1, -2, -3, -7, -8, and -9: 0.095 inch ± 0.005 inch
-4, -5, and -6: 0.070 inch ± 0.005 inch
-10, -11, and -12: 0.130 ± 0.005 inch

ATTACHING DEVICE:

1. Attaching device shall be prong and wing type clutch.

2. Two prongs shall be located at the intersection of the horizontal center line of the badge and the center of each side of the wings.

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. A forcer may be used to form the parachute, the star, and the star and wreath designs.

3. Piercing shall be as indicated. However, piercing around the star for midsize USAF badges (-10, -11) is at the option of the manufacturer.

4. Silver Plated Oxidized Buffed Relieved, Matte Finish and shall match TIOH Metal Finish Chip Number 14, May be used for commercial sale.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:57Z
Check the source to verify that this is the current version before use.

Custodians:
Army - IH
Navy - MC
Air Force - 11

Review activities:
Navy - CG1
DLA - CT

Preparing activity:
Army - IH

(Project No. 8455-2021-030)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:57Z
Check the source to verify that this is the current version before use.