NOT MEASUREMENT SENSITIVE


MIL-B-3628/31D
30 July 1993
SUPERSEDING
MIL-B-3628/31C
10 February 1988

MILITARY SPECIFICATION SHEET

BADGE, QUALIFICATION, SENIOR PARACHUTIST, NAVY AND MARINE CORPS

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-B-3628.

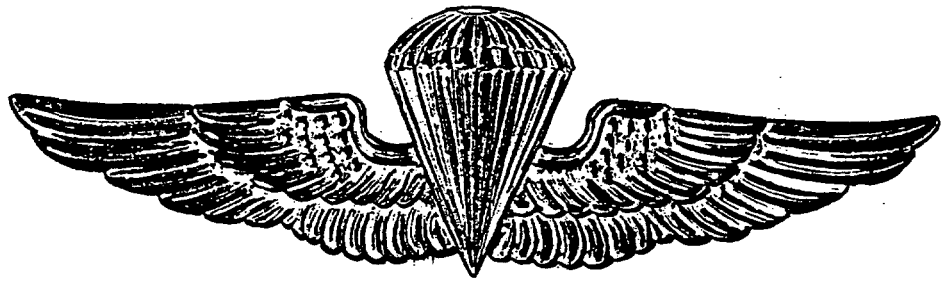

DASH NO:
-1: Regular Size
-2: Miniature Size

MATERIAL: Red Brass

FINISH: Gold Plated, Mirror-like Polished and shall match TIOH Metal Finish Chip Number 6.

DIMENSIONS:

HEIGHT (Overall):
-1: 13/16 inch (2.06 cm) (REF)
-2: 13/32 inch (1.03 cm) (REF)

WIDTH (Overall):
-1: 2-3/4 inches (6.99 cm) (REF)
-2: 1-3/8 inches (3.49 cm) (REF)

THICKNESS:
-1: 0.120 inch ± 0.005 inch (0.305 cm ± 0.012 cm)
-2: 0.085 inch ± 0.005 inch (0.216 cm ± 0.012 cm)

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:58Z
Check the source to verify that this is the current version before use.

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. The attaching device shall be prong and clutch type. Prongs shall be located on the horizontal center line, equidistant from each end. Prongs for Dash No. -1 shall be 2-1/8 inches ± 1/64 inch (5.40 cm ± 0.04 cm) apart. Prongs for Dash No. -2 shall be 1 inch ± 1/64 inch (2.54 cm ± 0.04 cm) apart.

3. A mock forcer may be used to bring up the design of the parachute.

Custodian:
Army - IH
Navy - NU

Review activities:
Navy - MC
DLA - CT

Preparing activities:
Army - IH

(Project No. 8455-0693)

Source: https://assist.dla.mil - Downloaded: 2026-10-16T18:58Z
Check the source to verify that this is the current version before use.