MILITARY SPECIFICATION SHEET

Badge, Qualification, COMBAT CREW MEMBER, Air Force

This specification is approved for use by all Departments and Agencies of the Department of Defense. The complete requirements for procuring the item(s) described herein shall consist of this document and the issue in effect of Specification MIL-B-3628.

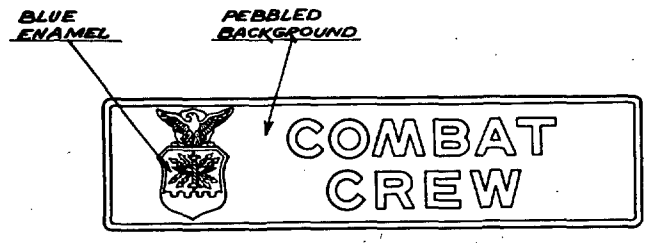

MATERIAL: GILDING METAL
DIMENSIONS (INCHES):
HEIGHT (OVERALL): 3/4 (REF)
WIDTH (OVERALL): 3 (REF)
THICKNESS (AT RIM): .070 ± .005
FINISH: ENAMELED, NICKEL PLATED, SILVER PLATED, SATIN FINISH WITH THE LETTERS, RIM AND BACKGROUND RELIEVED. REVERSE AND EDGES CLEAN.

NOTES:

1. ENAMELED AREA SHALL BE AS INDICATED. THE COLOR OF ENAMEL SHALL BE BLUE, CONFORMING TO TIOH CHIP NO. 18 AND SHALL MATCH THE COLOR OF THE ENAMEL ON THE STANDARD OR THE APPROVED SAMPLE.

2. ATTACHING DEVICE SHALL BE PRONG AND CLUTCH TYPE. THE PRONGS SHALL BE LOCATED 1/4 INCH FROM THE TOP OF THE BADGE, EQUIDISTANT FROM EACH END AND 2-1/2 ± 1/16 INCH ON CENTERS.

3. THE BADGE MAY BE MADE FROM STERLING SILVER FOR COMMERCIAL SALE AND IF SO THE THICKNESS DIMENSIONS GIVEN SHALL BE USED FOR REFERENCE ONLY. THE MINIMUM WEIGHT SHALL BE NOT LESS THAN 340 GRAINS. THE FINISH FOR STERLING SILVER SHALL BE AS SPECIFIED EXCEPT THE REQUIREMENT FOR SILVER PLATING SHALL NOT APPLY.

	CUSTODIANS:	REVIEW ACTIVITIES:	USER ACTIVITIES:
AIR FORCE	82	82	
OTHER		DP	

PREPARING ACTIVITY:

THE INSTITUTE OF HERALDRY, UNITED STATES ARMY

Project No. 8455-A094

/FSC 8455/

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:59Z
Check the source to verify that this is the current version before use.