NOT MEASUREMENT SENSITIVE

MIL-B-3628/32F
14 September 1990
SUPERSEDING
MIL-B-3628/32E
10 February 1988

MILITARY SPECIFICATION SHEET

BADGE, QUALIFICATION, COMBAT CREW MEMBER, AIR FORCE

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-B-3628.

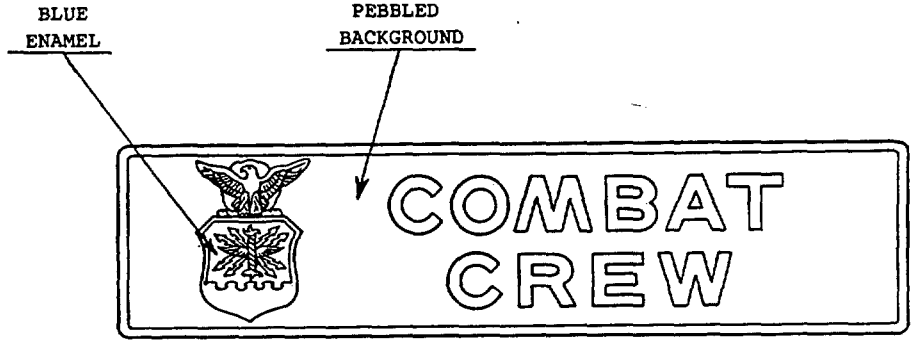

MATERIAL: Red brass or nickel silver

DIMENSIONS:
HEIGHT: 3/4 inch (1.91 cm) (REF)
WIDTH: 3 inches (7.62 cm) (REF)
THICKNESS (At rim): .070 inch ± .005 inch (0.177 cm ± 0.012 cm)

FINISH: Soft enameled, nickel plated (red brass only), silver plated, oxidized, matte finish with letters, rim and background relieved.

NOTES:
1. Attaching device shall be prong and clutch type. Prongs shall be located 1/4 inch ± 1/64 inch (0.64 cm ± 0.04 cm) from the top of the badge, equidistance from each end and 2-1/2 inches ± 1/16 inch (6.35 cm ± 0.16 cm) apart.
2. Enameled area shall be as indicated and shall conform to TIOH chip number 18 or the standard sample.
3. Badge may be nickel or rhodium plated with a mirror-like polished finish for commerical sale except the silver plating requirement shall not apply.

Custodians:
Army - IH
Air Force - 11

Preparing activity:
Army - IH

Review activities:
Air Force - 82,99
DLA - CT

(Project No. 8455-0536)

User activity:
Air Force - 45

AMSC N/A

FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:58Z
Check the source to verify that this is the current version before use.