NOT MEASUREMENT SENSITIVE

MIL-B-3628/32G
13 September 1991
SUPERSEDING
MIL-B-3628/32F
14 September 1990

MILITARY SPECIFICATION SHEET

Badge, Qualification, Combat Crew Member, Air Force

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-B-3628.

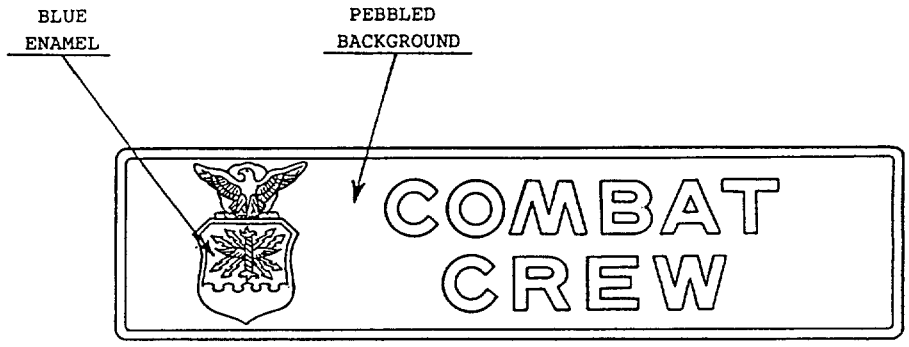

MATERIAL: Red brass or nick silver

DIMENSIONS:
HEIGHT: 3/4 inch (1.91 cm) (REF)
WIDTH: 3 inches (7.62 cm) (REF)
THICKNESS (At rim): .070 inch ± .005 inch (.177 cm ± 0.012 cm)

FINISH: Soft enameled, nickel plated, mirror-like polished

NOTES:
1. The attaching device shall be prong and clutch type. Prongs shall be located 1/4 inch ± 1/64 inch (0.64 cm ± 0.04 cm) from the top of the badge, equidistant from each end and 2-1/2 inches ± 1/16 inch (6.35 cm ± 0.16 cm) apart.
2. Enameled area shall be as indicated and shall conform to TIOH chip number 18 or the standard sample.

Custodians:
Army - IH
Air Force - 11

Review activities:
Air Force - 82,99
DLA - CT

Preparing activity:
Army - IH

(Project No. 8455-N614)

AMSC N/A

FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:58Z
Check the source to verify that this is the current version before use.